

Low-Power, RRIO, 1MHz Operational Amplifier for Cost-Sensitive Systems

General Description

ET85001 is a low-voltage (1.8V to 5.5V) operational amplifier with rail-to-rail input and output swing capabilities. ET85001 provides a cost-effective solution for space-constrained applications such as smoke detectors, wearable electronics, and small appliances where low-voltage operation and high capacitive-load drive are required. The capacitive-load drive is 500pF and the resistive open-loop output impedance makes stabilization easier with much higher capacitive-loads. ET85001 features the unity-gain stability and integrated RFI and EMI rejection filter and no-phase reversal in overdrive conditions.

ET85001 is specified for the extended industrial / automotive temperature range (-40°C to +125°C). ET85001 is available in SOT23-5/SC70-5/DFN4 packages.

Features

- Scalable CMOS amplifier for low-cost applications
- Rail-to-rail input and output
- Low input offset voltage: ± 0.4 mV
- Unity-gain bandwidth: 1 MHz
- Low broadband noise: $27 \text{ nV}/\sqrt{\text{Hz}}$
- Low input bias current: 5 pA
- Low quiescent current: 60 $\mu\text{A}/\text{Ch}$
- Unity-gain stable
- Internal RFI and EMI filter
- Operational at supply voltages as low as 1.8 V
- Easier to stabilize with higher capacitive load
- Extended temperature range: -40°C to 125°C

Applications


- Temperature sensors
- Sensor signal conditioning
- Power modules
- Active filters
- Low-side current sensing

ET85001

Device information

Part No.	Package	MSL
ET85001E/ ET85001EA	SOT23-5	Level 3
ET85001SC/ ET85001SCA	SC70-5	Level 1
ET85001D	DFN4(0.8×0.8)	Level 1

Pin Configuration

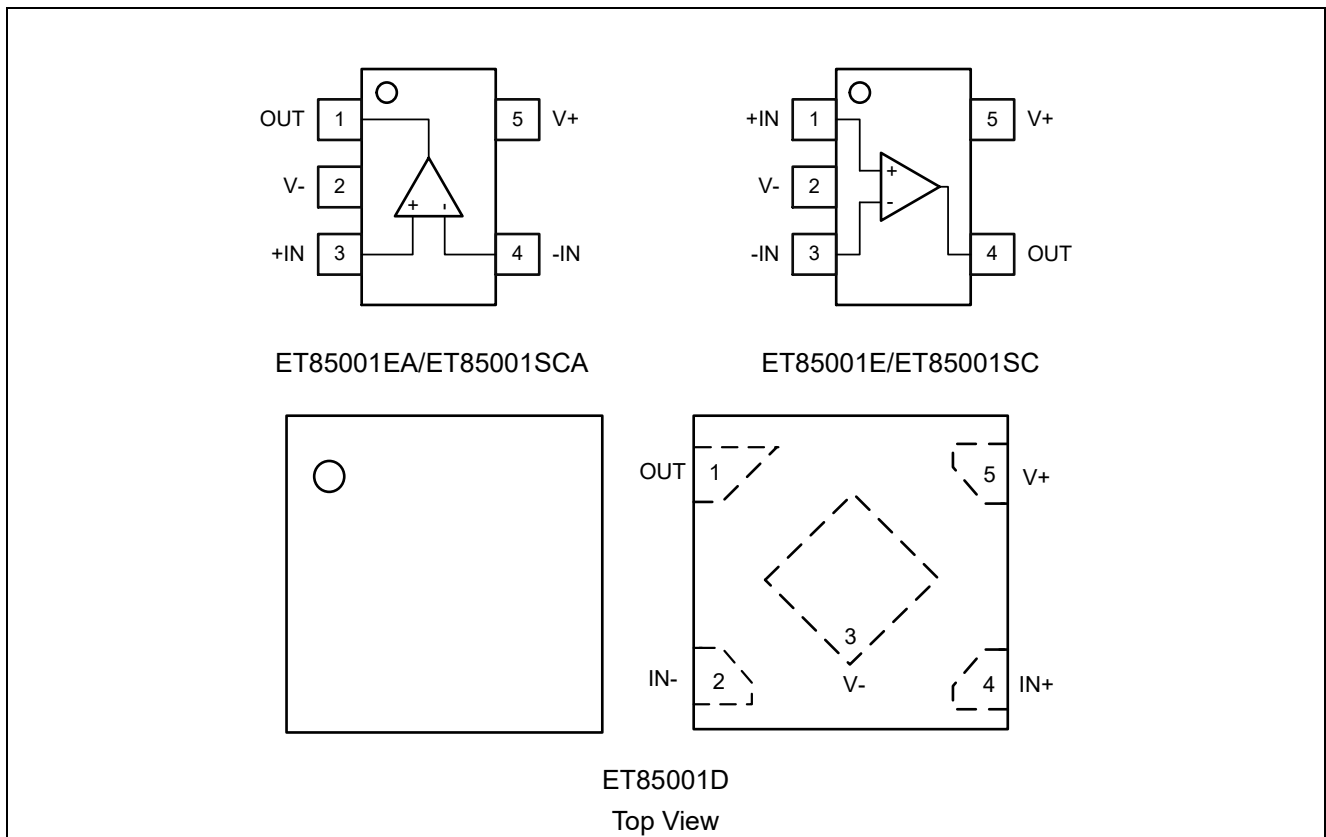

Pin Function

Pin Number			Symbol	Descriptions
ET85001EA/SCA	ET85001E/SC	ET85001D		
1	4	1	OUT	Output
2	2	3	V-	Negative supply
3	1	4	+IN	Non-inverting input
4	3	2	-IN	Inverting input
5	5	5	V+	Positive supply

Functional Description

Operating Voltage

ET85001 is for operation from 1.8 V to 5.5 V. In addition, many specifications such as input offset voltage, quiescent current, offset current, and short circuit current apply from -40°C to 125°C.

Rail-to-Rail Input

The input common-mode voltage range extends 100 mV beyond the supply rails for the full supply voltage range of 1.8 V to 5.5 V. This performance is achieved with a complementary input stage.

Rail-to-Rail Output

Designed as a low-power, low-voltage operational amplifier, the ET85001 delivers a robust output drive capability. A class AB output stage with common-source transistors achieves full rail-to-rail output swing capability. For resistive loads of 10 k Ω , the output swings to within 20 mV of either supply rail, regardless of the applied power-supply voltage. Different load conditions change the ability of the amplifier to swing close to the rails.

Device Functional Modes

ET85001 has a single functional mode. The devices are powered on as long as the power-supply voltage is between 1.8 V (± 0.9 V) and 5.5 V (± 2.75 V).

ET85001

Absolute Maximum Ratings

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are only stress ratings, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions are not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

Parameter	Rating	Unit
Supply Voltage ⁽¹⁾ (V+) - (V-)	6.0	V
Input Voltage	(V-)-0.3V to (V+)+0.3	V
Differential Input Voltage	(V+) - (V-)+0.2	V
ESD (Human Body Model)	±2000	V
Storage Temperature Range	-65 to +150	°C
Junction Temperature Range	-65 to +150	°C
Lead Temperature Range (Soldering, 60 sec)	300	°C
Operating Temperature Range	-40 to +125	°C

Note1: All voltage values, except differential voltage are with respect to network terminal.

Recommended Operating Conditions

Parameter	MIN	MAX	Unit
Supply Voltage (V _S)	1.8	5.5	V
Specified Temperature (T _A)	-40	125	°C

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	230	°C/W
	SOT23-5		180	°C/W
	DFN4		250	°C/W

ET85001

Electrical Characteristics

$V_S = (V+) - (V-) = 1.8 \text{ V to } 5.5 \text{ V}$ ($\pm 0.9 \text{ V to } \pm 2.75 \text{ V}$), $T_A = 25^\circ\text{C}$, $R_L = 10 \text{ k}\Omega$ connected to $V_S/2$, and $V_{CM} = V_{OUT} = V_S/2$ (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
OFFSET VOLTAGE						
V _{OS}	Input offset voltage	V _S = 5 V		±0.4	±1.6	mV
		V _S = 5 V, T _A = -40°C to 125°C			±2	
dV _{OS} /dT	V _{OS} vs temperature	T _A = -40°C to 125°C		±0.6		µV/°C
PSRR	Power-supply rejection ratio	V _S = 1.8 to 5.5 V, V _{CM} = (V-)	80	105		dB
INPUT VOLTAGE RANGE						
V _{CM}	Common-mode voltage range	No phase reversal, rail-to-rail input	(V-)-0.1		(V+)+0.1	V
CMRR	Common-mode rejection ratio	V _S = 1.8 V, (V-) - 0.1 V < V _{CM} < (V+) - 1.4 V, T _A = -40°C to 125°C		86		dB
		V _S = 5.5 V, (V-) - 0.1 V < V _{CM} < (V+) - 1.4 V, T _A = -40°C to 125°C		95		
		V _S = 5.5 V, (V-) -0.1 V < V _{CM} < (V+) + 0.1 V, T _A = -40°C to 125°C		77		
		V _S = 1.8 V, (V-) - 0.1 V < V _{CM} < (V+) + 0.1 V, T _A = -40°C to 125°C		68		
INPUT BIAS CURRENT						
I _B	Input bias current	V _S = 5 V		±5		pA
I _{OS}	Input offset current			±2		pA
NOISE						
E _n	Input voltage noise (peak to peak)	f = 0.1 Hz to 10 Hz, V _S = 5 V		4.7		µV _{PP}
e _n	Input voltage noise density	f = 1 kHz, V _S = 5 V		30		nV/√Hz
		f = 10 kHz, V _S = 5 V		27		

ET85001

Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
OPEN-LOOP GAIN						
A _{vo}	Open-loop voltage gain	V _S = 5.5 V, R _L = 10 kΩ (V-) + 0.05 V < V _O < (V+) - 0.05 V	104	117		dB
		V _S = 1.8 V, R _L = 10 kΩ (V-) + 0.04 V < V _O < (V+) - 0.04 V		100		
		V _S = 1.8 V, R _L = 2 kΩ (V-) + 0.1 V < V _O < (V+) - 0.1 V		115		
		V _S = 5.5 V, R _L = 2 kΩ (V-) + 0.15 V < V _O < (V+) – 0.15 V		130		
FREQUENCY RESPONSE						
GBW	Gain-bandwidth product	V _S = 5 V		1		MHz
φ _m	Phase margin	V _S = 5 V, G = 1		78		°
SR	Slew rate	V _S = 5 V		2		V/μs
t _{OR}	Overload recovery time	V _S = 5 V, V _{IN} × gain > V _S		0.85		μs
THD+N	Total harmonic distortion + noise	V _S = 5.5 V, V _{CM} = 2.5 V, V _O = 1 V _{RMS} , G = +1, f = 1 kHz,		0.004		%
OUTPUT						
V _O	Voltage output swing from supply rails	V _S = 5.5 V, R _L = 10 kΩ		10	20	mV
		V _S = 5.5 V, R _L = 2 kΩ		35	55	
I _{SC}	Short-circuit current	V _S = 5.5 V		±40		mA
POWER SUPPLY						
V _S	Specified voltage range		1.8 (±0.9)		5.5 (±2.75)	V
I _Q	Quiescent current per amplifier	I _O = 0 mA, V _S = 5.5 V		60	82	μA
		I _O = 0 mA, V _S = 5.5 V, T _A = -40°C to 125°C			85	

Application Notes

Layout Guidelines

For best operational performance of the device, use good PCB layout practices, including:

Place the external components as close to the device as possible. This configuration prevents parasitic errors (such as the Seebeck effect) from occurring.



To reduce parasitic coupling, run the input traces as far away from the supply lines and digital signal as possible. Low-ESR, 0.1 μ F ceramic bypass capacitors must be connected between each supply pin and ground, placed as close to the device as possible. A single bypass capacitor from V+ to ground is applicable to single supply applications.

Consider a driven, low-impedance guard ring around the critical traces. A guard ring can significantly reduce leakage currents from nearby traces that are at different potentials.


ET85001

Package Dimension


SOT23-5

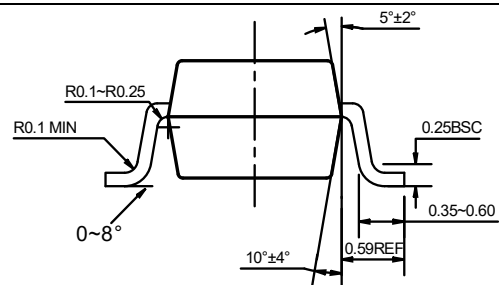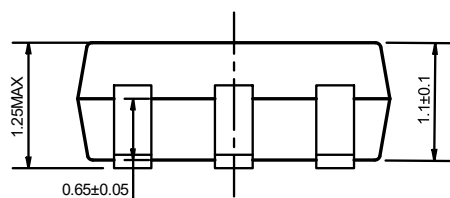

SIDE VIEW

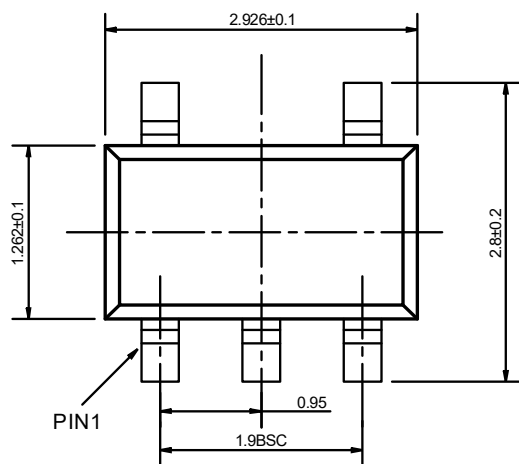

TOP VIEW

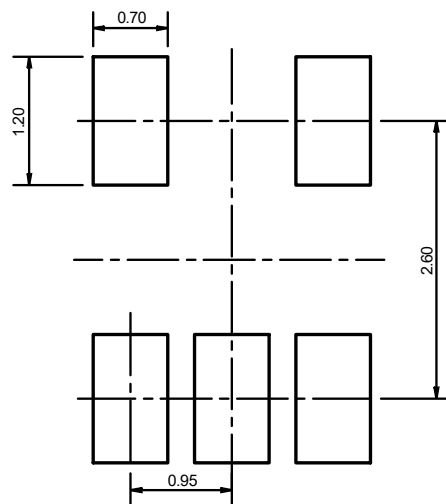


Recommended Land Pattern


Unit: mm

ET85001


SC70-5

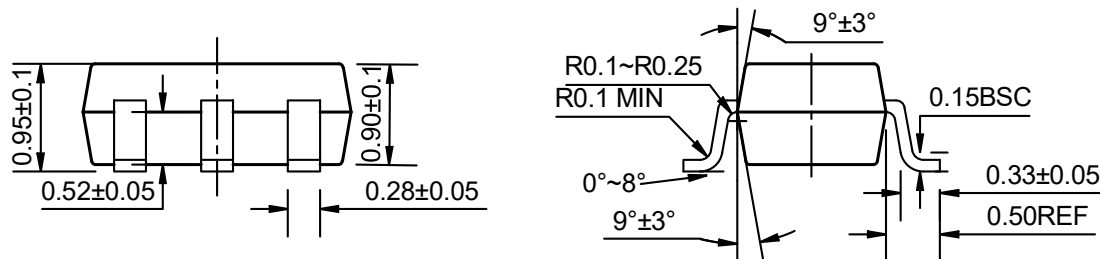

SIDE VIEW

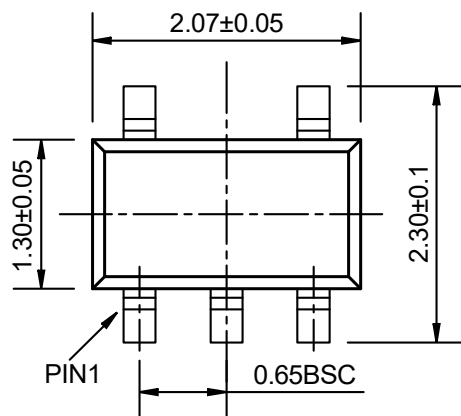

TOP VIEW

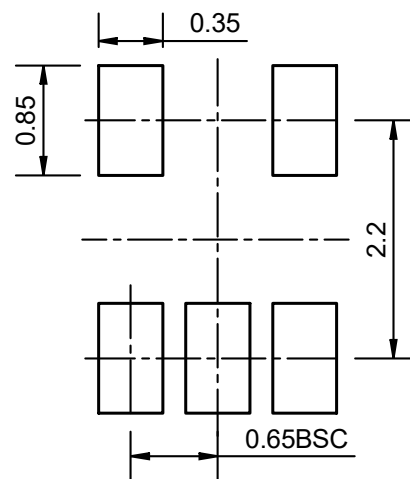


Recommended Land Pattern

Unit: mm

ET85001

DFN4

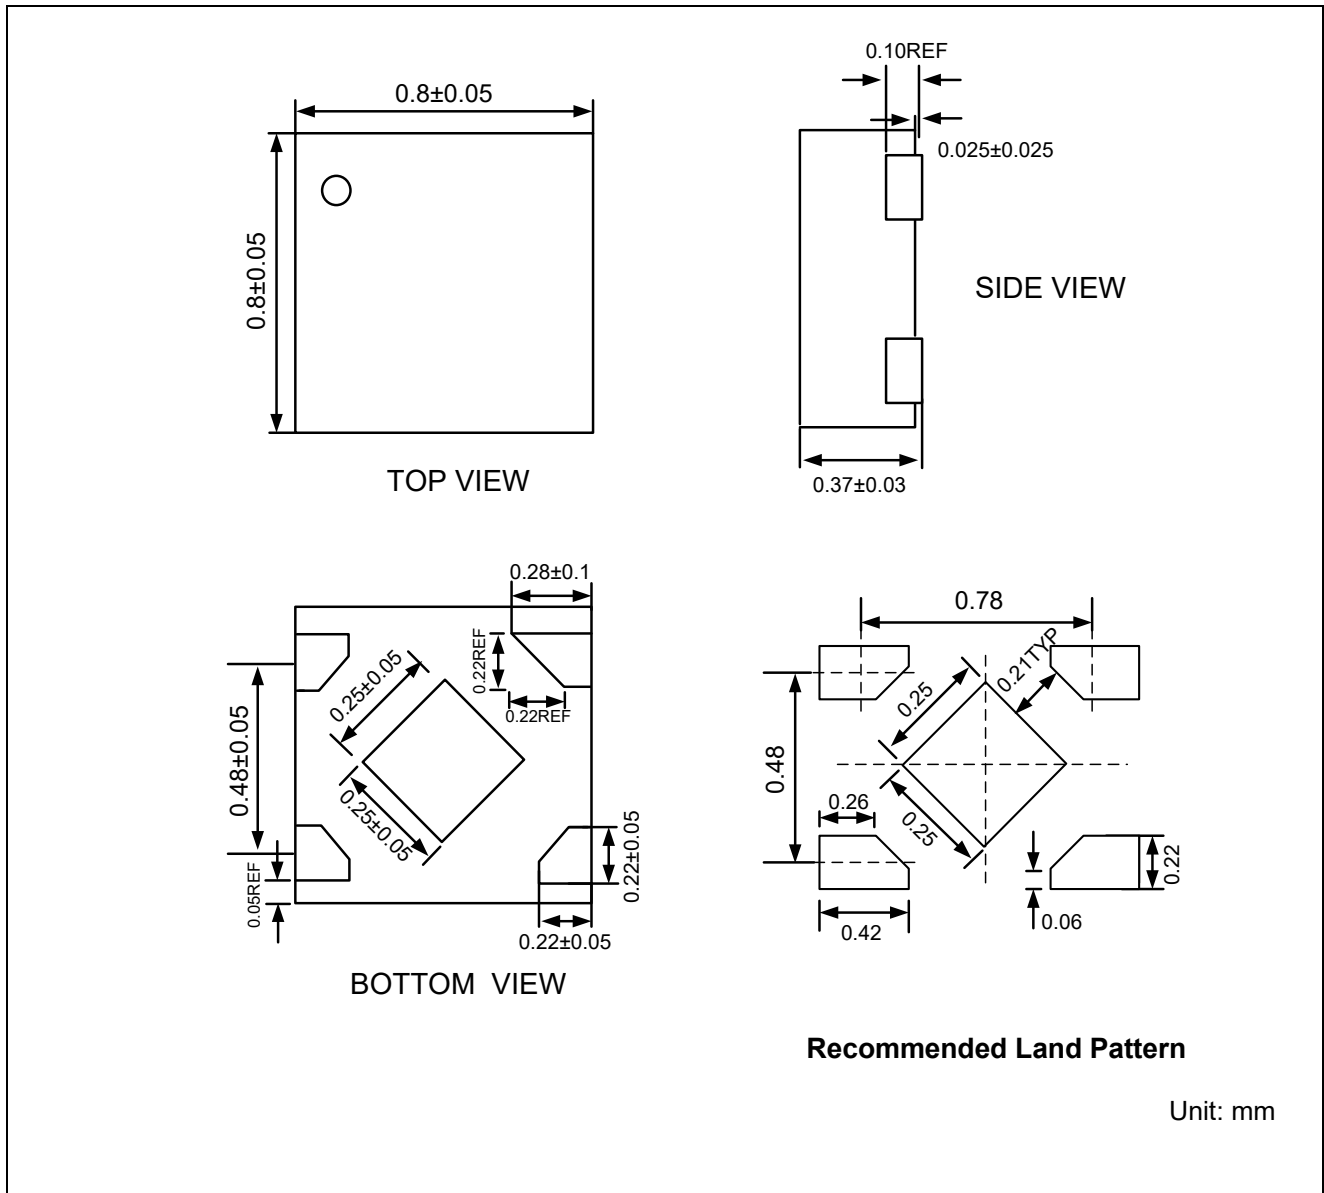

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2022-9-21	Preliminary Version	Shibo	Wanggp	Liu jy
1.0	2023-4-6	Original Version	Huyt	Wanggp	Liu jy
1.1	2023-9-27	Naming updates	Shibo	Wanggp	Liu jy
1.2	2024-11-27	IQ max changed 82uA	Shibo	Wanggp	Liu jy