

ET6202 - Dot Matrix LED Driver

General Description


ET6202 is a high reliability matrix LED driver IC with 10 segments output (SEG), 4 commons output (GRID), 3 segments/commons output (SEG/GRID), display memory, control circuit, key scan circuit , using 3-line serial interface communication.

Features

- High performance CMOS process, low power consumption
- Display Mode: 10 Segs × 7 Grids ~13 Segs × 4 Grids ,Max support 70 LED matrix
- Keyboard scanning: 2 × 10 matrix
- Dimming adjustment: 8 step
- 3-Line serial interface
- Package information:

Part No.	Package	MSL
ET6202	SOP28	3

Pin Assignments

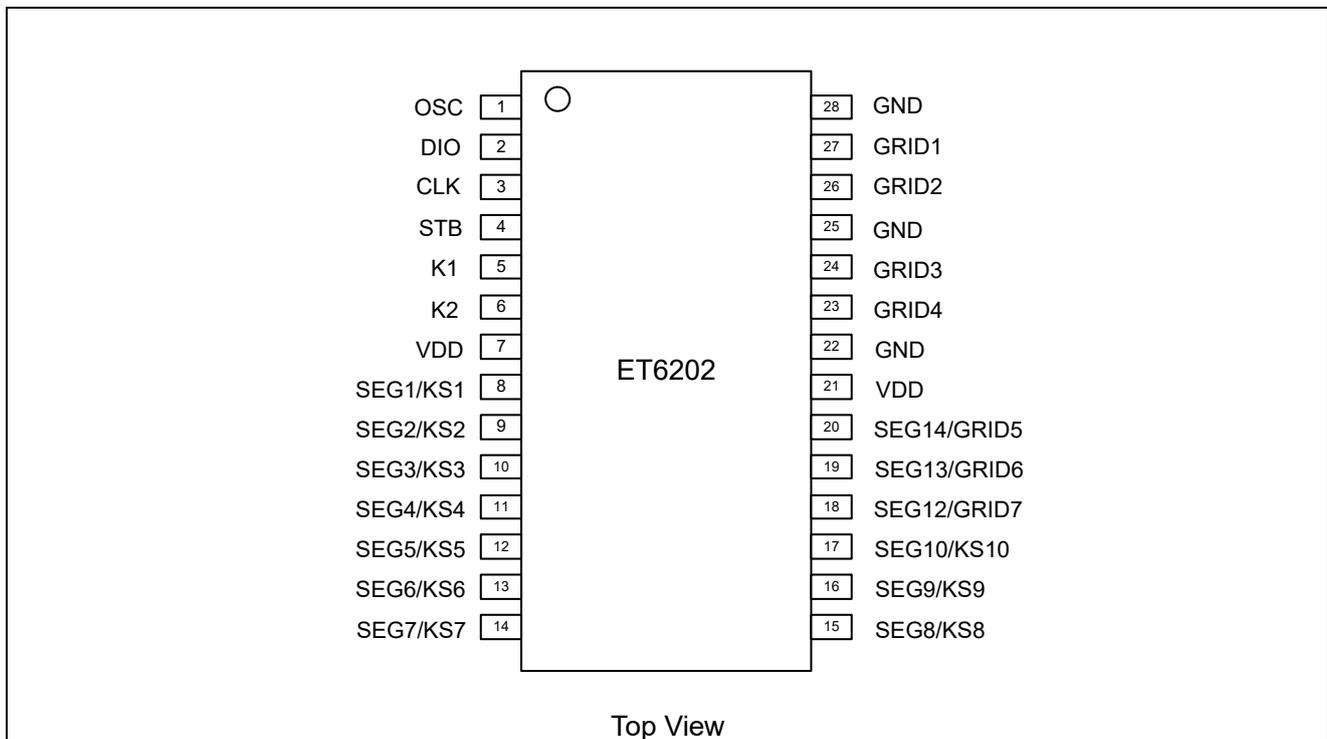


ET6202

Pin. Function

Pin No.	Symbol	I/O	Description
1	OSC	-	Oscillator Input Pin A resistor is connected to this pin to determine the oscillation frequency
2	DIO	I/O	Serial data input/output port. (open-drain output structure)
3	CLK	I	Serial clock input port.
4	STB	I	Serial data strobe port.
5, 6	K1, K2	I	Key data input port.
22, 25, 28	GND	—	Ground
8~17	SG1/KS1~SG10/KS10	O	Segment output port (Connected LED positive pole)/Key scan output
18, 19, 20	SG12/GR7~SG14/GR5	O	Segment/Grid output port, select segment or grid output through registers.
7, 21	VDD	—	power Input
23, 24, 26, 27	GR4~GR1	O	Grid output port, Connected LED negative pole

Function Diagram

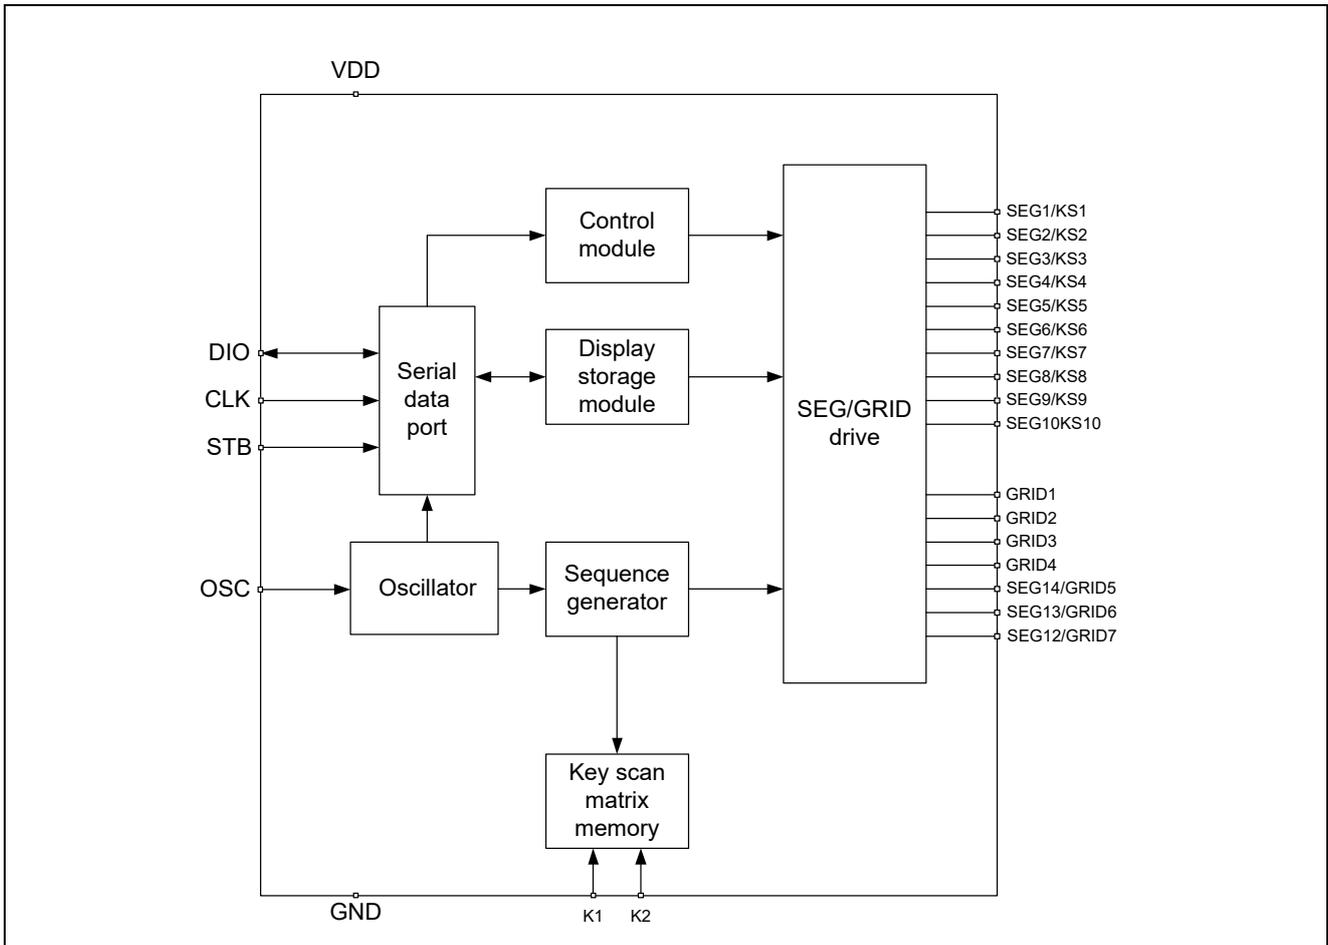

ET6202

Functions Description

Command

After the STB port status changes from high to low, input command bytes through the DIO port. If the STB port is set to high for some reason while the data or command is being transmitted, the serial communication is initialized and the data/command being entered is considered invalid.

Command 1: display mode setting command

The display mode setting command determines the number of segments (4~7 grids, 13~10 segments) used. A display command must be executed to continue the display. If the same mode is selected, the command is not executed.

MSB						LSB		Function	Description
B7	B6	B5	B4	B3	B2	B1	B1		
0	0	NC, Set to 0 please				0	0	Display segment and grid setting	13 Segs×4 Grids
0	0					0	1		12 Segs×5 Grids
0	0					1	0		11 Segs×6 Grids
0	0					1	1		10 Segs×7 Grids


Command2: Data Command Setting

Data setup commands perform write display data or read keys. When the power supply is powered on, bits 4 to 1 (B3 to B0) should be set to 0.

MSB						LSB		Function	Description		
B7	B6	B5	B4	B3	B2	B1	B0				
0	1	NC, Set to 0 please			0				Mode setting	Normal mode	
					1					Test mode	
						0			Address mode	Automatic address increase	
						1				Fixed address	
							0	0	Data write/read	Display data input mode	
							1	0		Read Key Data	

Key scan matrix

The key scan matrix is composed of 2×10 array:

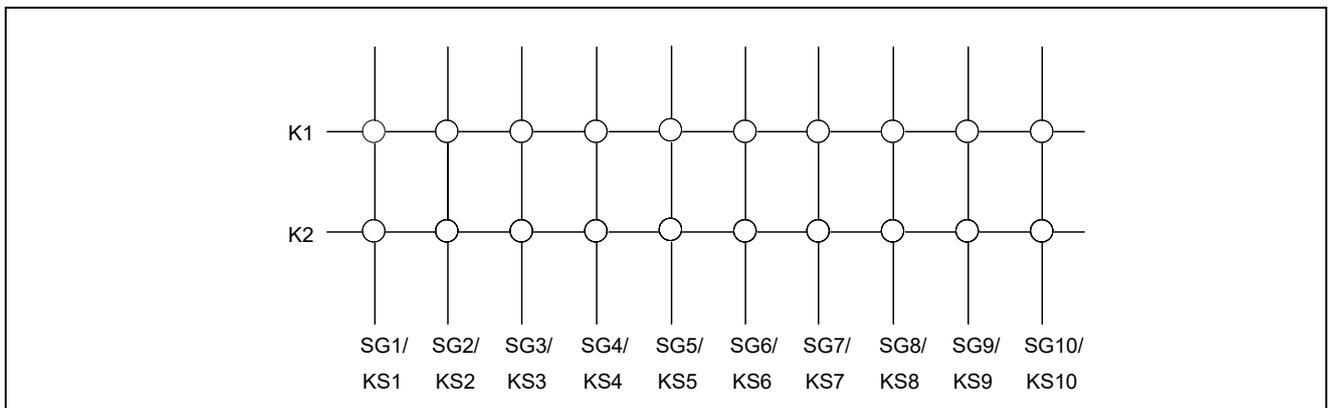

ET6202

Key scan data storage RAM

The input data is stored as follows: the READ command is used to READ from the highest bit.

	B0	B1	B2	B3	B4	B5	B6	B7	READING SEQUENCE ↓
BYTE1	SG1/KS1		x	SG2/KS2		x			
BYTE2	SG3/KS3		x	SG4/KS4		x			
BYTE3	SG5/KS5		x	SG6/KS6		x			
BYTE4	SG7/KS7		x	SG8/KS8		x			
BYTE5	SG9/KS9		x	SG10/KS10		x			
	K1	K2		K1	K2				

Note: B2、B5~B7 undefined.

Command3: Display Address Setting

The address setting command is used to set the display memory address. If the address ranges from 00H to 0DH, the address is valid. If the address is 0EH or higher, the data is invalid unless the correct address is set again. When the power supply is powered on, the address is 00H.

MSB

LSB

B7	B6	B5	B4	B3	B2	B1	B0	Description
1	1	NC, fill in 0		0	0	0	0	Display address 00H
1	1			0	0	0	1	Display address 01H
1	1			0	0	1	0	Display address 02H
1	1			0	0	1	1	Display address 03H
1	1			0	1	0	0	Display address 04H
1	1			0	1	0	1	Display address 05H
1	1			0	1	1	0	Display address 06H
1	1			0	1	1	1	Display address 07H
1	1			1	0	0	0	Display address 08H
1	1			1	0	0	1	Display address 09H
1	1			1	0	1	0	Display address 0AH
1	1			1	0	1	1	Display address 0BH
1	1			1	1	0	0	Display address 0CH
1	1			1	1	1	0	Display address 0DH

Address assignment:

SG1.....SG4	SG5.....SG8	SG9.....SG12	SG13.....SG14	Matrix Address
00HL	00Hu	01HL	01Hu	DIG1
02HL	02Hu	03HL	03Hu	DIG2
04HL	04Hu	05HL	05Hu	DIG3
06HL	06Hu	07HL	07Hu	DIG4
08HL	08Hu	09HL	09Hu	DIG5
0AHL	0AHu	0BHL	0BH <u>u</u>	DIG6
0CHL	0CHu	0DHL	0DHu	DIG7

ET6202


B0	B1	B2	B3	B4	B5	B6	B7
××HL				××Hu			
Low 4bits				High 4bits			

Command4: Display Control Setting

MSB		LSB						Function	Description
B7	B6	B5	B4	B3	B2	B1	B0		
1	0	NC, fill in 0			0	0	0	Display duty cycle setting	Duty cycle is 1/16
1	0				0	0	1		Duty cycle is 2/16
1	0				0	1	0		Duty cycle is 4/16
1	0				0	1	1		Duty cycle is 10/16
1	0				1	0	0		Duty cycle is 11/16
1	0				1	0	1		Duty cycle is 12/16
1	0				1	1	0		Duty cycle is 13/16
1	0				1	1	1		Duty cycle is 14/16
1	0				0				
1	0		1					Display ON	

Scan and display timing


Key scan and display sequence diagram as shown below. A cycle of key scanning consists of 2 frames. The data of the 10 x 2 matrix is stored in RAM.

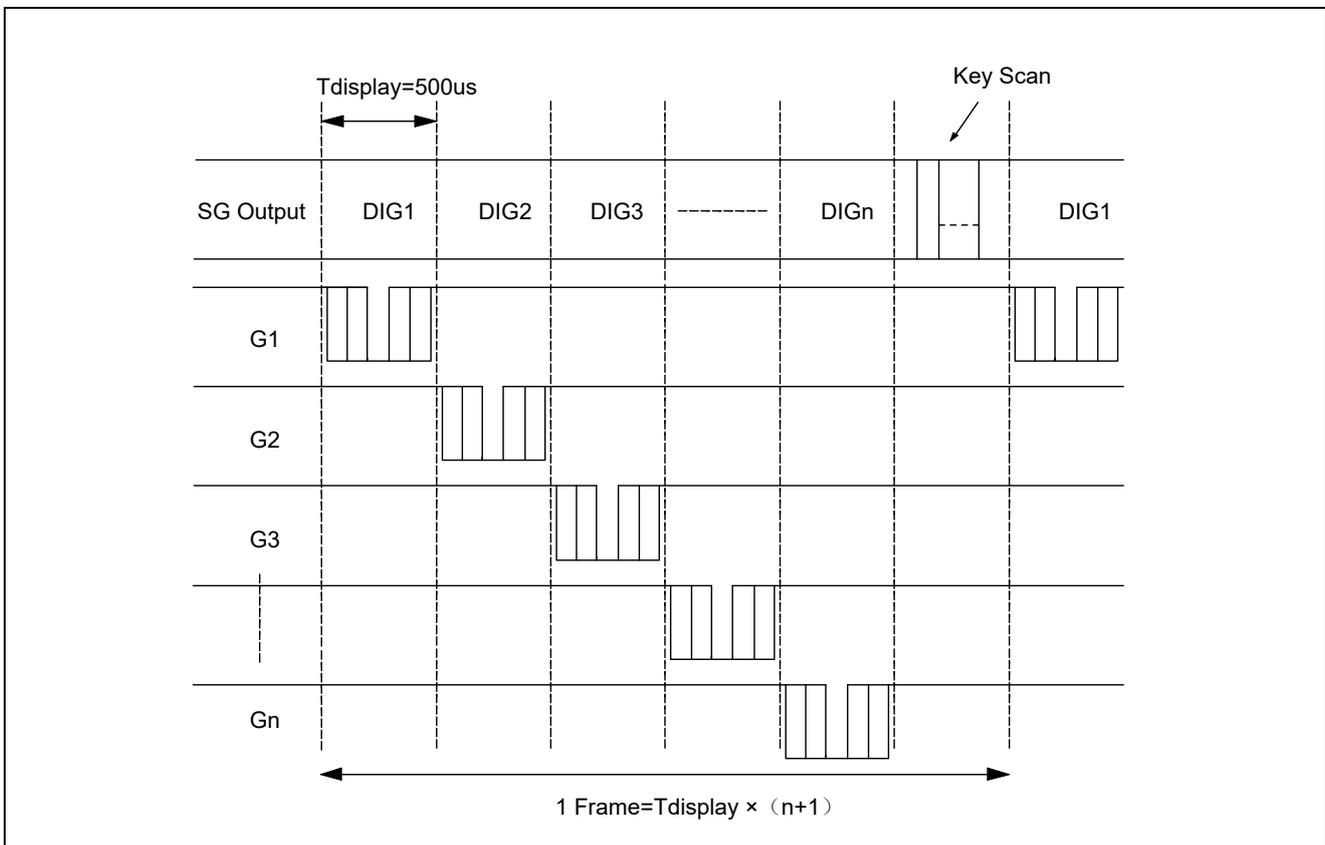


ET6202

Serial Communication Format

The following figure shows the serial communication format of ET6202. It is recommended to connect a pull-up resistor (1K ~ 10K) to the DIO port.

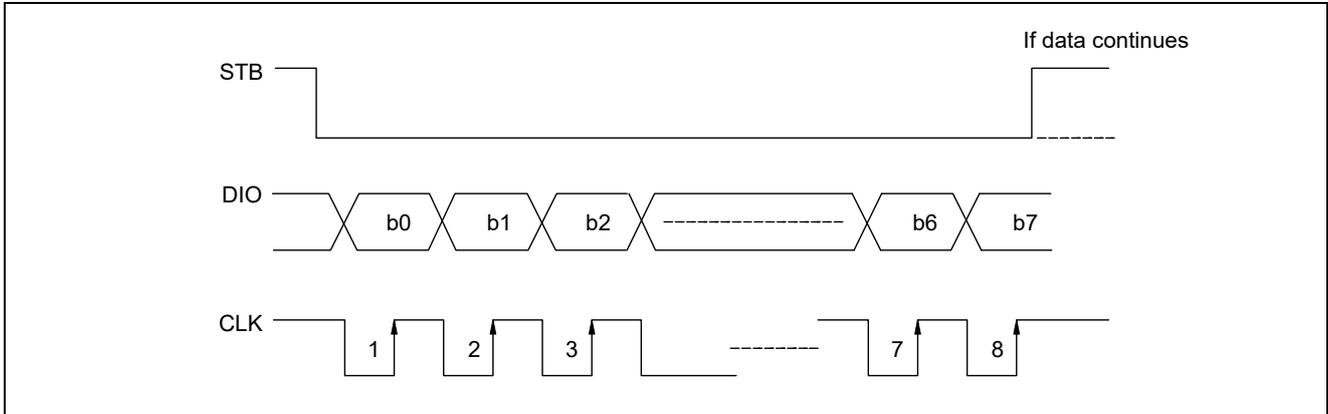

Data transmission (Data read)

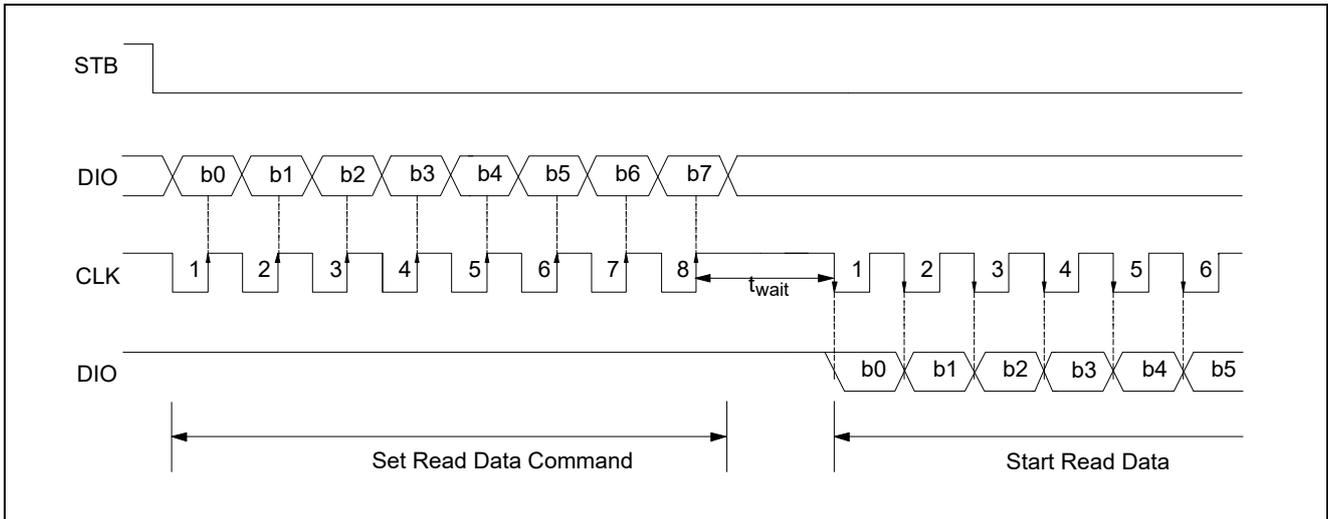


Note: T_{wait} (waiting time) $\geq 1\mu s$.

It should be noted that when reading data, the rising edge is the eighth clock of the instruction to the falling edge of the first clock of the subsequent data reading must be longer than or equal to 1us waiting time(T_{wait}).

ET6202

Conversion Characteristic Waveform

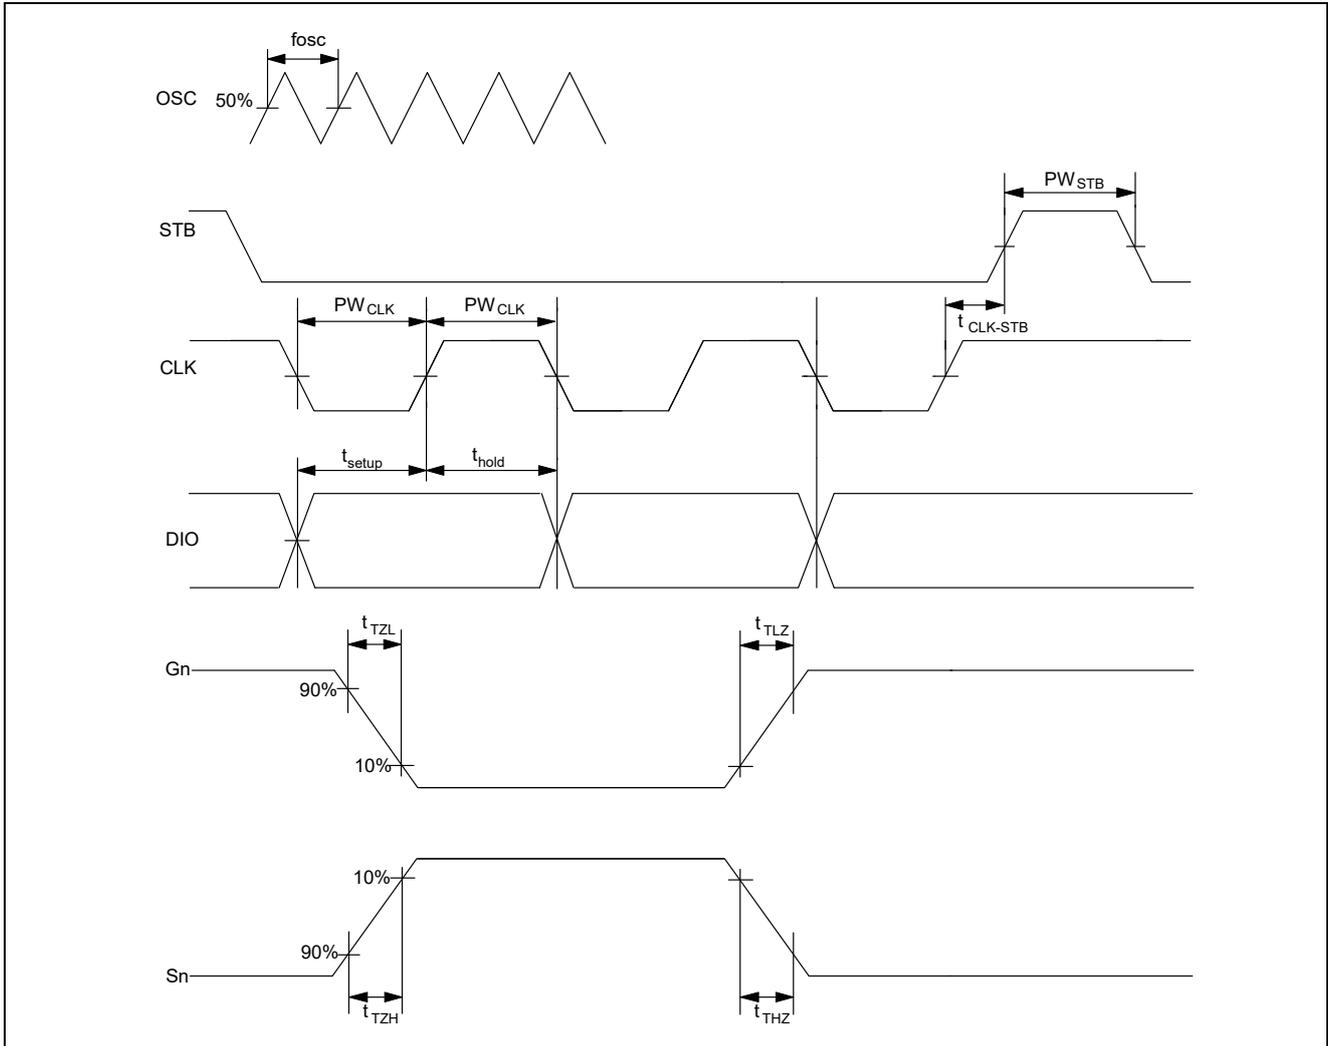

Transformation Characteristic

Symbol	Description	Range	Units
PW_{CLK}	CLK pulse width	≥ 400	ns
PW_{STB}	STB pulse width	≥ 1	us
t_{setup}	Data setup time	≥ 100	ns
t_{hold}	Date hold time	≥ 100	ns
$t_{CLK-STB}$	CLK-STB time	≥ 1	us
t_{THZ}	Falling time	≤ 10	us
t_{TZH}	Rising time	≤ 1	us
t_{TZL}		< 1	us
t_{TLZ}		< 10	us


Note: The test conditions are as follows:

t_{THZ} (pull-down resistance = 10k Ω , loading capacitance = 300pF), t_{TLZ} (pull-up resistance = 10k Ω , loading capacitance = 300pF)

ET6202


Communication application time series

Continuous display data writing (Automatic address increase)

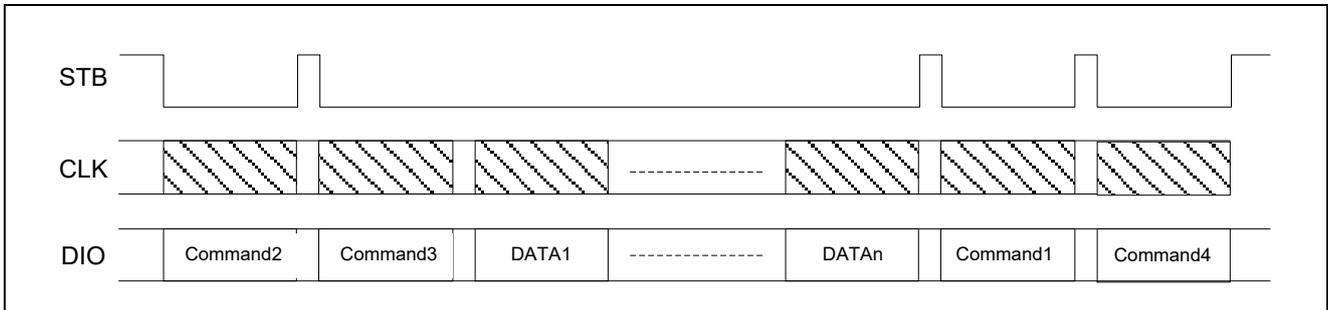

- Command1: Display mode setting
- Command2: Data command setting
- Command3: Address command setting
- DATA1~n: Display data(MAX 14bytes)
- Command4: Display control command


Single display data writing (fixed address mode)

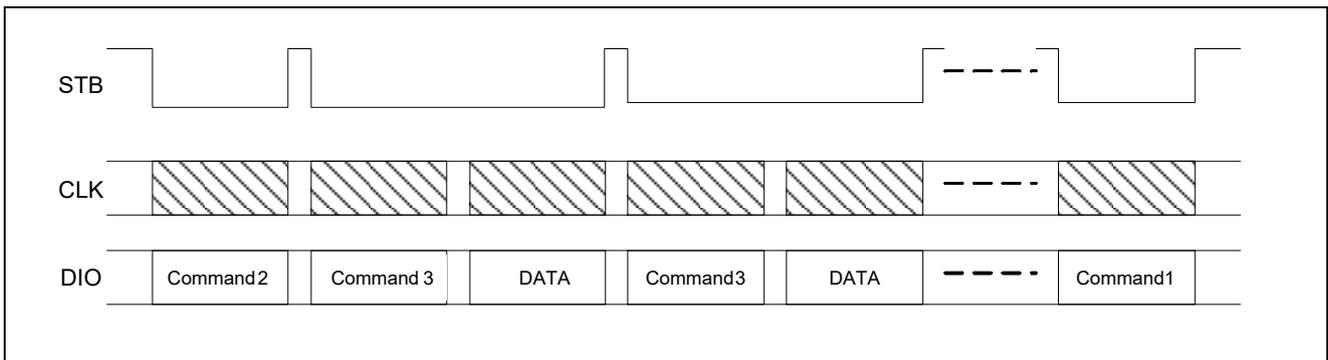

- Command1: Display mode setting
- Command2: Data command setting
- Command3: Address command setting
- DATA: Display data

ET6202

Software flow chart

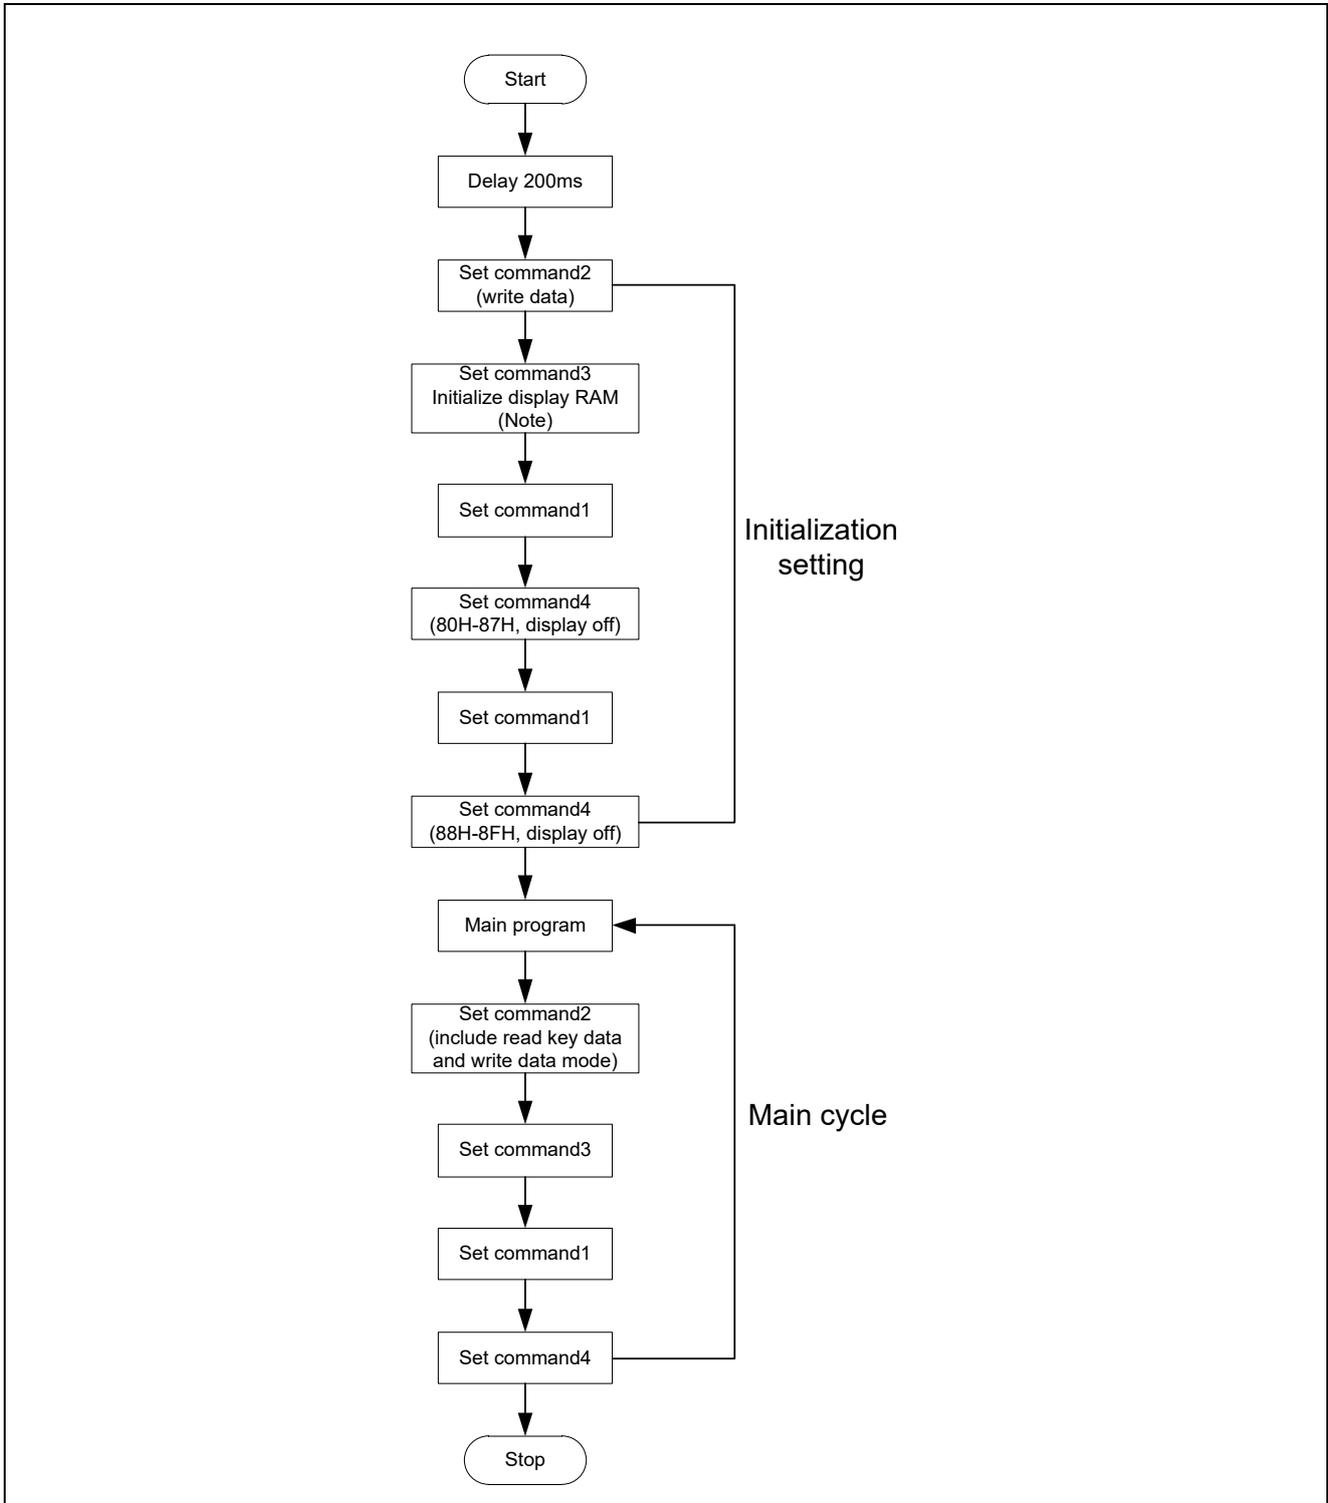

Notes:

- Command1: Display mode setting
- Command2: Data command setting
- Command3: Address command setting
- Command4: Display control command

When the IC is powered on for the first time, the contents of the display RAM are not defined, so be sure to clear the contents of the display RAM in the initialization setting.

ET6202

Absolute Maximum Ratings

(Unless otherwise noted, $T_A=25^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Supply Voltage	V_{DD}	-0.5~+7	V
Logic Input Voltage	V_I	-0.5~ $V_{DD}+0.5$	V
Driver Output Current	I_{OLGR}	+250	mA
	I_{OHSG}	-50	mA
Max Output Driver current	I_{TOTAL}	250	mA
Operating Junction Temperature	T_J	-40~+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^{\circ}\text{C}$

Recommended Operating Conditions

(Unless otherwise noted, $T_A = 25^{\circ}\text{C}$)

Characteristic	Symbol	Min	Typ	Max	Unit
Supply Voltage	V_{DD}	3.0	5.0	5.5	V
Dynamic current	$I_{DD_DYN}^*$	—	—	5	mA
High Level Input Voltage	V_{IH}	$0.8V_{DD}$	—	V_{DD}	V
Low Level Input Voltage	V_{IL}	0	—	$0.25V_{DD}$	V
Operating Temperature	T_A	-40		85	$^{\circ}\text{C}$

Note*: Test condition Set display mode command = 80H (display off & no load).

ET6202

Electrical Characteristics

(Unless otherwise noted, $V_{DD}=5V$, $T_A=25^\circ C$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
High Level Output Current	I_{OHSG1}	$V_O=V_{DD}-2V$, SG1~SG10, SG12/GR7~SG14/GR5	-20	-25	-40	mA
	I_{OHSG2}	$V_O=V_{DD}-3V$, SG1~SG10, SG12/GR7~SG14/GR5	-25	-30	-50	mA
Low Level Output Current	I_{OLGR}	$V_O=0.3V$, GR1~GR4, SG12/GR7~SG14/GR5	100	140	—	mA
Low Level Output Current (DIO Pin)	I_{OLDOUT}	$V_O=0.4V$	4	—	—	mA
Percentage of high level output current at segment	I_{TOLSG}	$V_O=V_{DD}-3V$, SG1~SG10, SG12GR7~SG14/GR5	—	—	+5	%
High Level Input Voltage	V_{IH}	—	$0.6V_{DD}$	—	V_{DD}	V
Low Level Input Voltage	V_{IL}	—	0	—	$0.3V_{DD}$	V
Oscillation Frequency	F_{OSC}	$R = 51k$	350	500	650	kHz
K1 ~ K2 Pull-down Resistance	R_{KN}	K1~K2	40	—	100	k Ω

Electrical Characteristics


(Unless otherwise noted, $V_{DD}=3.3V$, $T_A=25^\circ C$)

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
High Level Output Current	I_{OHSG1}	$V_O = V_{DD} - 2V$, SG1~SG10, SG12~SG14	-15	-20	-35	mA
Low Level Output Current	I_{OLGR}	$V_O = 0.3V$, GR1~GR7,	85	110	—	mA
Low Level Output Current (DIO Pin)	I_{OLDOUT}	$V_O=0.4V$	4	—	—	mA
High Level Input Voltage	V_{IH}	—	$0.8V_{DD}$	—	3.3	V
Low Level Input Voltage	V_{IL}	—	0	—	$0.3V_{DD}$	V
Oscillation Frequency	F_{OSC}	$R = 51k$	300	420	580	kHz
K1 ~ K2 Pull-down Resistance	R_{KN}	K1~K2	40	—	100	k Ω

ET6202

Package

SOP28

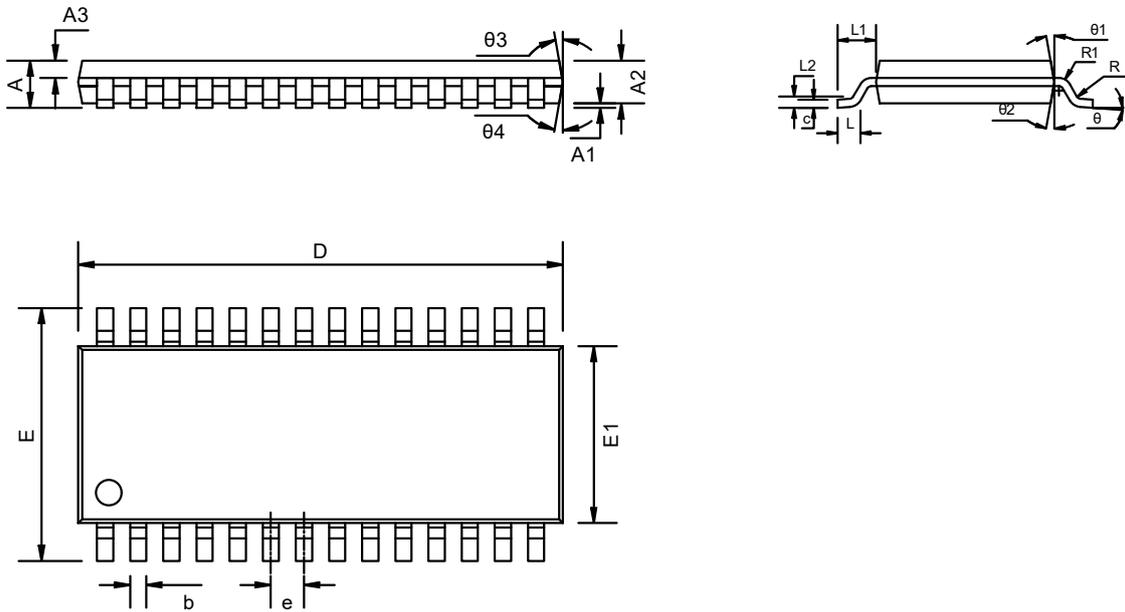

Dimensions Table (Units:mm)

Symbol	Min	Typ	Max
A	--	--	2.95
A1	0.10	0.20	0.30
A2	2.25	2.45	2.65
A3	1.20	1.30	1.40
b	0.41	--	0.54
c	0.15	--	0.20
D	17.40	17.50	17.60
E	10.20	10.40	10.60
E1	7.50	7.60	7.70
e	1.27 BSC		
L	0.40	0.60	0.80
L1	1.30 REF		
L2	0.25 BSC		
R	0.10	--	--
R1	0.10	--	--
θ	0°	--	8°
θ1	13°	15°	17°
θ2	6°	8°	10°
θ3	9.5°	11.5°	13.5°
θ4	6°	8°	10°


ET6202

Marking




ET6202 - Part Number
XXXXXXX - Tracking Number

Tape

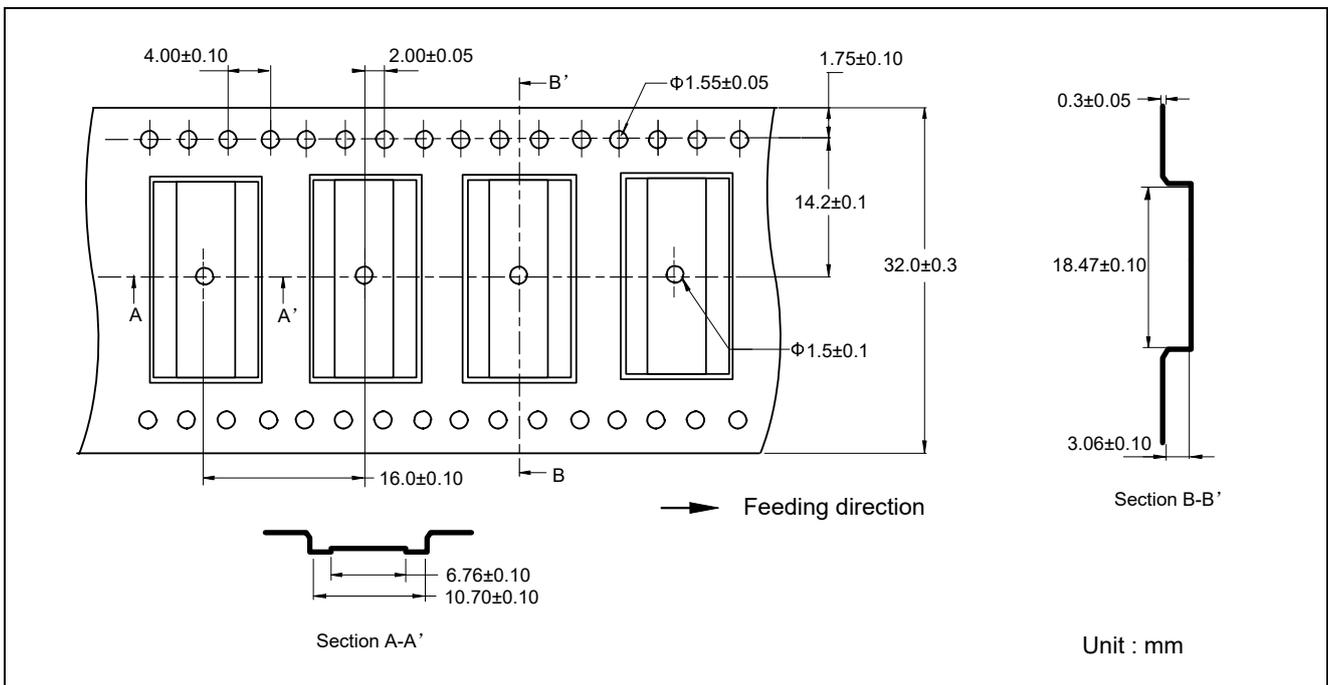

ET6202

Reel

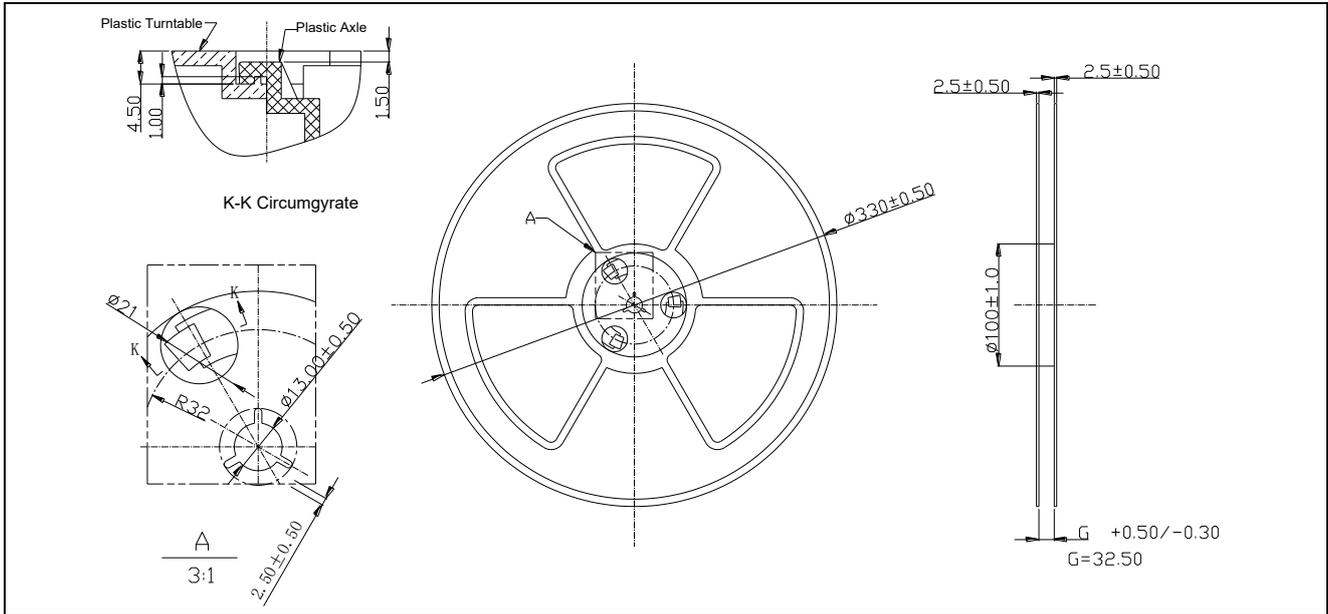

Package

Package Type	Units/ Reel	Reel /Inner Box	Units/Inner Box
SOP28	1250	1	1250

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2018-01-19		Shilj	Shilj	Zhuji
1.1	2020-04-3	Updated formatting	shibo	Shilj	Zhuji
1.2	2021-02-05	Adding packaging information	Zhuhui	Shilj	Zhuji
1.3	2021-12-8	Update package size	Zhuhui	Shilj	Zhuji
1.4	2022-12-19	Update Reel	Shibo	Shilj	Zhuji