

4-Bit Dual Supply Translating Transceiver with Configurable Voltage Translation; 3-State

General Description

The ET74AVCH4T245 is a 4-bit, dual supply transceiver that enables bidirectional level translation. It features two 4-bit input-output ports (nAn and nBn), a direction control input (DIR), an output enable input ($\overline{OE}$) and dual supply pins (VCC(A) and VCC(B)). Both VCC(A) and VCC(B) can be supplied at any voltage between 0.8V and 3.6V making the device suitable for translating between any of the low voltage nodes (0.8V, 1.2V, 1.8V and 3.3V). Pins nAn, $\overline{OE}$ and DIR are referenced to VCC(A) and pins nBn are referenced to VCC(B). A HIGH on DIR allows transmission from nAn to nBn and a LOW on DIR allows transmission from nBn to nAn. The output enable input ($\overline{OE}$) can be used to disable the outputs so the buses are effectively isolated.

The device is fully specified for partial power-down applications using I_{OFF}. The I_{OFF} circuitry disables the output, preventing any damaging backflow current through the device when it is powered down. In suspend mode when either VCC(A) or VCC(B) are at GND level, both An and Bn outputs are in the high-impedance OFF-state. The bus-hold circuitry on the powered-up side always stays active.

The ET74AVCH4T245 has active bus hold circuitry which is provided to hold unused or floating data inputs at a valid logic level. This feature eliminates the need for external pull-up or pull-down resistors.

Features

- Wide Supply Voltage Range:
 - V_{CC(A)}: 0.8V to 3.6V
 - V_{CC(B)}: 0.8V to 3.6V
- Fully Configurable Dual-Rail Design
- Maximum Data Rates:
 - 380Mbit/s (≥ 1.8V to 3.3V translation)
 - 200Mbit/s (≥ 1.2V to 3.3V translation)
 - 200Mbit/s (≥ 1.2V to 2.5V translation)
 - 200Mbit/s (≥ 1.2V to 1.8V translation)
 - 150Mbit/s (≥ 0.8V to 1.5V translation)
- Bus Hold on Data Inputs
- IOFF Circuitry Provides Partial Power-down Mode Operation
- ESD Protection Complies with JESD22 Standard
 - HBM: ±4000V Pass (JEDEC JS-001)
 - CDM: ±1500V Pass (JEDEC JS-002)
- Latch-up Performance Exceeds ±100mA per JEDEC JESD78F
- Part No. and Package Information


ET74AVCH4T245

Part No.	Package	MSL
ET74AVCH4T245V	TSSOP16 (4.4mm × 5mm)	Level 3
ET74AVCH4T245Y	QFN16 (1.8mm × 2.6mm)	Level 1
ET74AVCH4T245M	SOP16 (9.9mm × 3.9mm)	Level 3

Applications

- Personal Electronic
- Industrial Equipment
- Enterprise Infrastructure
- Telecom Equipment

Pin Configuration

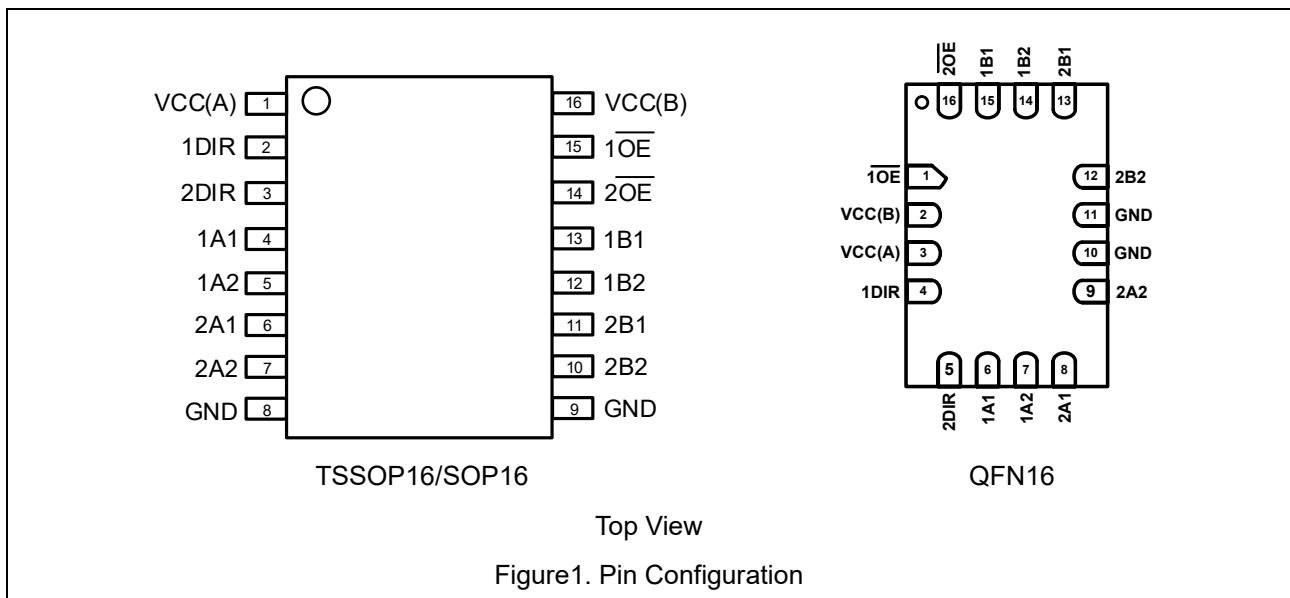

Pin Function

Pin Name	Pin		I/O	Description
	TSSOP16 SOP16	QFN16		
VCC(A)	1	3	—	Supply Voltage Pin of A Side
VCC(B)	16	2	—	Supply Voltage Pin of B Side
1DIR,2DIR	2,3	4,5	I	Direction-control Signal. Referenced to VCC(A)
2 $\overline{OE}$,1 $\overline{OE}$	14,15	16,1	I	3-state Output-mode Enables. Pull $\overline{OE}$ high to place all outputs in 3-state mode. Referenced to VCC(A)
1A1~2A2	4~7	6~9	I/O	Input/Output 1A1~2A2.Referenced to VCC(A)
2B2~1B1	10~13	12~15	I/O	Input/Output 2B2~1B1.Referenced to VCC(B)
GND	8,9	10,11	—	Ground

ET74AVCH4T245

Functional Diagram

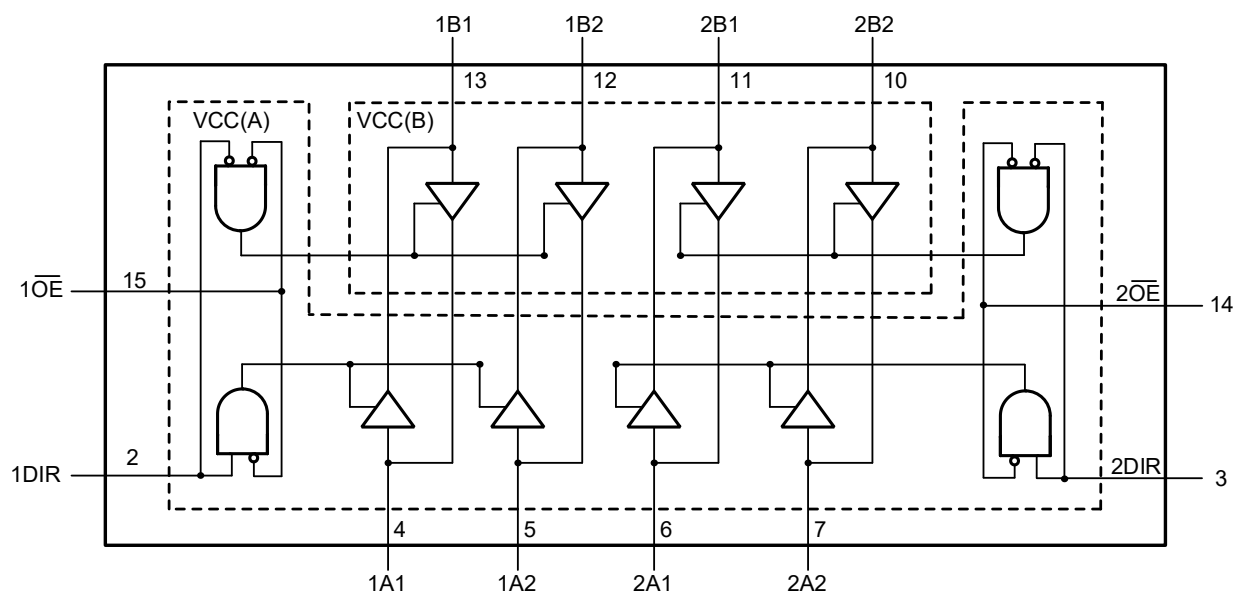


Figure2. Logic Symbol

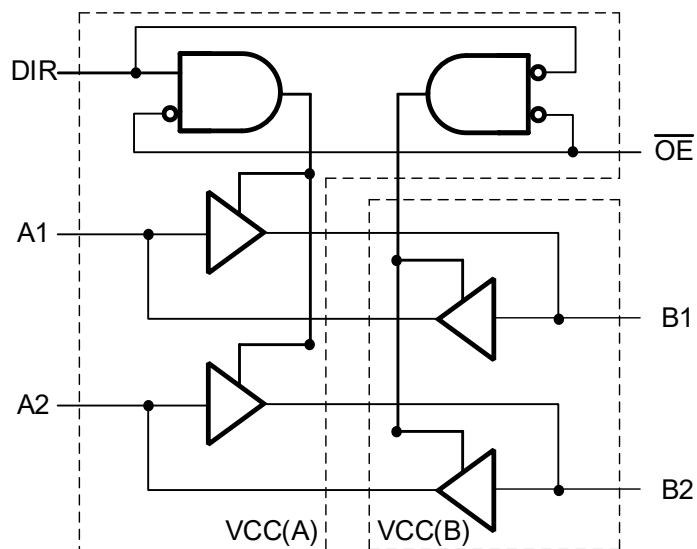


Figure3. Logic Diagram

ET74AVCH4T245

Functional Description

Table 1. Function table⁽¹⁾

Supply Voltage	Input		Input/Output	
$V_{CC(A)}, V_{CC(B)}$	$\overline{nOE}^{(2)}$	$nDIR^{(2)}$	$nAn^{(2)}$	$nBn^{(2)}$
0.8V to 3.6V	L	L	$nAn = nBn$	Input
0.8V to 3.6V	L	H	input	$nBn = nAn$
0.8V to 3.6V	H	X	Hi-Z	Hi-Z
GND ⁽³⁾	X	X	Hi-Z	Hi-Z

Note1: H = High Voltage Level; L = Low Voltage Level; X = Don't Care; Z = High-impedance OFF-state.

Note2: The nAn , DIR and $\overline{OE}$ input circuit is referenced to $V_{CC(A)}$; The Bn input circuit is referenced to $V_{CC(B)}$.

Note3: If at least one of $V_{CC(A)}$ or $V_{CC(B)}$ is at GND level, the device goes into suspend mode.

Absolute Maximum Ratings

Symbol	Parameter	Conditions	Rating	Unit
$V_{CC(A)}$	Supply Voltage A Side ($V_{CC(A)}$ Pin)		-0.5~4.6	V
$V_{CC(B)}$	Supply Voltage B Side ($V_{CC(B)}$ Pin)		-0.5~4.6	V
I_{IK}	Input Clamping Current	$V_I < 0V$	-50	mA
V_I	Input Voltage ⁽⁴⁾		-0.5~4.6	V
I_{OK}	Output Clamping Current	$V_O < 0V$	-50	mA
V_O	Output Voltage	Active Mode ⁽⁵⁾	-0.5~ $V_{CCO} +$	V
		Suspend or 3-state Mode	-0.5~4.6	V
I_O	Output Current	$V_O = 0V$ to V_{CC}	± 50	mA
I_{CC}	Supply Current	Per $V_{CC(A)}$ or $V_{CC(B)}$ Pin	+100	mA
I_{GND}	Ground Current	Per GND Pin	-100	mA
T_{STG}	Storage Temperature		-65 to 150	°C
T_J	Operating Junction Range		-40 to 150	°C
V_{ESD}	Human Body Mode ⁽⁶⁾		± 4000	V
	Charged Device Mode ⁽⁷⁾		± 1500	V
I_{LU}	Latch-up Current ⁽⁸⁾		± 100	mA

Note4: I/O absolute maximum rating must be observed.

Note5: V_{CCO} is the supply voltage associated with the output port.

Note6: HBM tested per JEDEC JS-001.

Note7: CDM tested per JEDEC JS-002.

Note8: Latch Up Current Maximum Rating tested per JEDEC JESD78F.

ET74AVCH4T245

Recommended Operating Conditions

Symbol	Parameter	Conditions	Rating	Unit
$V_{CC(A)}$	Supply Voltage A Side (VCC(A))		0.8~3.6	V
$V_{CC(B)}$	Supply Voltage B Side (VCC(B))		0.8~3.6	V
V_I	Input Voltage		0~3.6	V
V_O	Output Voltage	Active Mode	0~ V_{CCO}	V
		Suspend or 3-state	0~3.6	V
T_A	Operating Ambient Temperature		-40 to 125	°C
t_r, t_f	Input Rise and Fall Time	$V_{CCI} = 0.8V$ to 3.6V ⁽⁹⁾	5	ns/V

Note9: V_{CCI} is the supply voltage associated with the input port.

ET74AVCH4T245

Electrical Characteristics

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

V_{CCI} is the supply voltage associated with the data input port; V_{CCO} is the supply voltage associated with the output port.

Symbol	Parameter	Conditions	$T_A = +25^\circ\text{C}$			Unit
			Min	Typ	Max	
V_{OH}	High-Level Output Voltage	$V_I = V_{IH}$ or V_{IL} ; $I_O = -1.5\text{mA}$; $V_{CC(A)} = V_{CC(B)} = 0.8\text{V}$		0.69		V
V_{OL}	Low-Level Output Voltage	$V_I = V_{IH}$ or V_{IL} ; $I_O = 1.5\text{mA}$; $V_{CC(A)} = V_{CC(B)} = 0.8\text{V}$		0.07		V
I_I	Input Leakage Current	DIR, $\overline{OE}$ Input; $V_I = 0\text{V}$ or 3.6V ; $V_{CC(A)} = V_{CC(B)} = 0.8\text{V}$ to 3.6V		± 0.025	± 0.25	μA
$I_{BHL}^{(10)}$	Bus Hold LOW Current	A or B Port; $V_I = 0.42\text{V}$; $V_{CC(A)} = V_{CC(B)} = 1.2\text{V}$		26		μA
$I_{BHH}^{(10)}$	Bus Hold HIGH Current	A or B Port; $V_I = 0.78\text{V}$; $V_{CC(A)} = V_{CC(B)} = 1.2\text{V}$		-24		μA
$I_{BHLO}^{(10)}$ (11)	Bus Hold LOW Overdrive Current	$V_{CC(A)} = V_{CC(B)} = 1.2\text{V}$		27		μA
$I_{BHHO}^{(10)}$ (11)	Bus Hold HIGH Overdrive Current	$V_{CC(A)} = V_{CC(B)} = 1.2\text{V}$		-26		μA
I_{OZ}	Off-State Output Current	A or B Port; $V_O = 0\text{V}$ or V_{CCO} ; $V_{CC(A)} = V_{CC(B)} = 3.6\text{V}$		± 0.5	± 2.5	μA
		Suspend Mode A Port; $V_O = 0\text{V}$ or V_{CCO} ;		± 0.5	± 2.5	μA
		Suspend Mode B Port; $V_O = 0\text{V}$ or V_{CCO} ;		± 0.5	± 2.5	μA
I_{OFF}	Power-Off Leakage Current	A Port; V_I or $V_O = 0\text{V}$ to 3.6V ; $V_{CC(A)} = 0\text{V}$; $V_{CC(B)} = 0.8\text{V}$ to 3.6V		± 0.1	± 1	μA
		B Port; V_I or $V_O = 0\text{V}$ to 3.6V ; $V_{CC(B)} = 0\text{V}$; $V_{CC(A)} = 0.8\text{V}$ to 3.6V		± 0.1	± 1	μA
C_I	Input Capacitance	DIR, $\overline{OE}$ Input; $V_I = 0\text{V}$ or 3.3V ; $V_{CC(A)} = V_{CC(B)} = 3.3\text{V}$		4		pF
$C_{I/O}$	Input/Output Capacitance	A and B Port; $V_O = 3.3\text{V}$ or 0V ; $V_{CC(A)} = V_{CC(B)} = 3.3\text{V}$		6.5		pF

ET74AVCH4T245

DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	-40°C ≤ T _A ≤ +85°C		-40°C ≤ T _A ≤ +125°C		Unit
			Min	Max	Min	Max	
V _{IH}	High-Level Input Voltage	Data Input					
		V _{CCI} = 0.8V	0.7V _{CCI}		0.7V _{CCI}		V
		V _{CCI} = 1.1V to 1.95V	0.65V _{CCI}		0.65V _{CCI}		V
		V _{CCI} = 2.3V to 2.70V	1.6		1.6		V
		V _{CCI} = 3.0V to 3.60V	2.0		2.0		V
		DIR, $\overline{\text{OE}}$ Input					
		V _{CC(A)} = 0.8V	0.7V _{CC(A)}		0.7V _{CC(A)}		V
		V _{CCI} = 1.1V to 1.95V	0.65V _{CC(A)}		0.65V _{CC(A)}		V
		V _{CCI} = 2.3V to 2.70V	1.6		1.6		V
		V _{CCI} = 3.0V to 3.60V	2.0		2.0		V
V _{IL}	Low-Level Input Voltage	Data Input					
		V _{CCI} = 0.8V		0.3V _{CCI}		0.3V _{CCI}	V
		V _{CCI} = 1.1V to 1.95V		0.35V _{CCI}		0.35V _{CCI}	V
		V _{CCI} = 2.3V to 2.70V		0.7		0.7	V
		V _{CCI} = 3.0V to 3.60V		0.8		0.8	V
		DIR, $\overline{\text{OE}}$ Input					
		V _{CC(A)} = 0.8V		0.3V _{CC(A)}		0.3V _{CC(A)}	V
		V _{CCI} = 1.1V to 1.95V		0.35V _{CC(A)}		0.35V _{CC(A)}	V
		V _{CCI} = 2.3V to 2.70V		0.7		0.7	V
		V _{CCI} = 3.0V to 3.60V		0.8		0.8	V
V _{OH}	High-Level Output Voltage	V _I = V _{IH} or V _{IL}					
		I _O = -100μA; V _{CC(A)} = V _{CC(B)} = 0.8V to 3.6V	V _{CCO} - 0.1		V _{CCO} - 0.1		V
		I _O = -3mA; V _{CC(A)} = V _{CC(B)} = 1.2V	0.85		0.85		V
		I _O = -6mA; V _{CC(A)} = V _{CC(B)} = 1.4V	1.05		1.05		V
		I _O = -8mA; V _{CC(A)} = V _{CC(B)} = 1.65V	1.2		1.2		V
		I _O = -9mA; V _{CC(A)} = V _{CC(B)} = 2.3V	1.75		1.75		V
		I _O = -12mA; V _{CC(A)} = V _{CC(B)} = 3.0V	2.3		2.3		V
V _{OL}	Low-Level Output Voltage	V _I = V _{IH} or V _{IL}					
		I _O = 100μA; V _{CC(A)} = V _{CC(B)} = 0.8V to 3.6V		0.10		0.10	V
		I _O = 3mA; V _{CC(A)} = V _{CC(B)} = 1.2V		0.25		0.25	V
		I _O = 6mA; V _{CC(A)} = V _{CC(B)} = 1.4V		0.35		0.35	V
		I _O = 8mA; V _{CC(A)} = V _{CC(B)} = 1.65V		0.45		0.45	V
		I _O = 9mA; V _{CC(A)} = V _{CC(B)} = 2.3V		0.55		0.55	V
		I _O = 12mA; V _{CC(A)} = V _{CC(B)} = 3.0V		0.70		0.70	V

ET74AVCH4T245

DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	-40°C ≤ T _A ≤ +85°C		-40°C ≤ T _A ≤ +125°C		Unit
			Min	Max	Min	Max	
I _I	Input Leakage Current	DIR, $\overline{\text{OE}}$ Input; V _I = 0V or 3.6V; V _{CC(A)} = V _{CC(B)} = 0.8V to 3.6V		±1		±5	μA
I _{BHL} ⁽¹⁰⁾	Bus Hold LOW Current	A or B Port					
		V _I = 0.49V; V _{CC(A)} = V _{CC(B)} = 1.4V	15		15		μA
		V _I = 0.58V; V _{CC(A)} = V _{CC(B)} = 1.65V	25		25		μA
		V _I = 0.70V; V _{CC(A)} = V _{CC(B)} = 2.3V	45		45		μA
		V _I = 0.80V; V _{CC(A)} = V _{CC(B)} = 3.3V	100		90		μA
I _{BHH} ⁽¹⁰⁾	Bus Hold HIGH Current	A or B Port					
		V _I = 0.91V; V _{CC(A)} = V _{CC(B)} = 1.4V	-15		-15		μA
		V _I = 1.07V; V _{CC(A)} = V _{CC(B)} = 1.65V	-25		-25		μA
		V _I = 1.60V; V _{CC(A)} = V _{CC(B)} = 2.3V	-45		-45		μA
		V _I = 2.00V; V _{CC(A)} = V _{CC(B)} = 3.3V	-100		-100		μA
I _{BHLO} ⁽¹⁰⁾ ⁽¹¹⁾	Bus Hold LOW Overdrive Current	A or B Port					
		V _{CC(A)} = V _{CC(B)} = 1.4V	125		125		μA
		V _{CC(A)} = V _{CC(B)} = 1.65V	200		200		μA
		V _{CC(A)} = V _{CC(B)} = 2.3V	300		300		μA
		V _{CC(A)} = V _{CC(B)} = 3.3V	500		500		μA
I _{BHHO} ⁽¹⁰⁾ ⁽¹¹⁾	Bus Hold HIGH Overdrive Current	A or B Port					
		V _{CC(A)} = V _{CC(B)} = 1.4V	-125		-125		μA
		V _{CC(A)} = V _{CC(B)} = 1.65V	-200		-200		μA
		V _{CC(A)} = V _{CC(B)} = 2.3V	-300		-300		μA
		V _{CC(A)} = V _{CC(B)} = 3.3V	-500		-500		μA
I _{OZ}	Off-State Output Current	A or B Port; V _O = 0 V or V _{CCO} ; V _{CC(A)} = V _{CC(B)} = 3.6V		±5		±30	μA
		Suspend Mode A Port; V _O = 0V or V _{CCO} ; V _{CC(A)} = 3.6V; V _{CC(B)} = 0V		±5		±30	μA
		Suspend Mode B Port; V _O = 0V or V _{CCO} ; V _{CC(A)} = 0V; V _{CC(B)} = 3.6V		±5		±30	μA
I _{OFF}	Power-Off Leakage Current	A Port; V _I or V _O = 0V to 3.6V; V _{CC(A)} = 0V; V _{CC(B)} = 0.8V to 3.6V		±5		±30	μA
		B Port; V _I or V _O = 0V to 3.6V; V _{CC(B)} = 0V; V _{CC(A)} = 0.8V to 3.6V		±5		±30	μA

Note10: '+/-' represents the direction of the current.

Note11: I_{BHL}, I_{BHH} means the bus hold current; I_{BHLO}, I_{BHHO} means the minimum overdrive current to flip the level.

ET74AVCH4T245

DC Electrical Characteristics (Continued)

Symbol	Parameter	Conditions	$-40^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$		$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$		Unit
			Min	Max	Min	Max	
I_{CC}	Supply Current	A Port; $V_I = 0\text{V}$ or V_{CCI} ; $I_O = 0\text{A}$					
		$V_{CC(A)} = 0.8\text{V}$ to 3.6V ; $V_{CC(B)} = 0.8\text{V}$ to 3.6V		20		70	μA
		$V_{CC(A)} = 3.6\text{V}$; $V_{CC(B)} = 0\text{V}$		20		70	μA
		$V_{CC(A)} = 0\text{V}$; $V_{CC(B)} = 3.6\text{V}$	-2		-12		μA
		B Port; $V_I = 0\text{V}$ or V_{CCI} ; $I_O = 0\text{A}$					
		$V_{CC(A)} = 0.8\text{V}$ to 3.6V ; $V_{CC(B)} = 0.8\text{V}$ to 3.6V		20		70	μA
		$V_{CC(A)} = 3.6\text{V}$; $V_{CC(B)} = 0\text{V}$		20		70	μA
		$V_{CC(A)} = 0\text{V}$; $V_{CC(B)} = 3.6\text{V}$	-2		-12		μA
		A Plus B Port ($I_{CC(A)} + I_{CC(B)}$); $I_O = 0\text{A}$; $V_I = 0\text{V}$ or V_{CCI} ; $V_{CC(A)} = 0.8\text{V}$ to 3.6V ; $V_{CC(B)} = 0.8\text{V}$ to 3.6V		16		65	μA

Table 2. Typical Total Supply Current, $T_A = 25^{\circ}\text{C}$ ($I_{CC(A)} + I_{CC(B)}$)

$V_{CC(A)}$	$V_{CC(B)}$						Unit
	0V	1.2V	1.5V	1.8V	2.5V	3.3V	
0V	0	0.1	0.1	0.1	0.1	0.1	μA
1.2V	0.1	0.1	0.1	0.1	0.2	1.0	μA
1.5V	0.1	0.1	0.1	0.1	0.4	0.6	μA
1.8V	0.1	0.1	0.1	0.1	0.1	0.3	μA
2.5V	0.1	0.2	0.3	0.1	0.1	0.1	μA
3.3V	0.1	0.8	0.5	0.9	0.1	0.1	μA

ET74AVCH4T245

Dynamic Characteristics

Typical switching characteristics at $V_{CC(A)} = 0.8V$ and $T_A = 25^\circ C$ (unless otherwise noted)

Voltages are referenced to GND (ground = 0V); for test circuit see [Figure6](#); for wave forms see [Figure4](#) and [Figure5](#).

t_{pd} is the same as t_{PLH} and t_{PHL} ; t_{dis} is the same as t_{PLZ} and t_{PHZ} ; t_{en} is the same as t_{PZL} and t_{PZH} .

Symbol	Parameter	Conditions	$V_{CC(B)}$				Unit
			0.8V	1.2V	1.8V	3.3V	
t_{pd}	Propagation Delay	nAn to nBn	21.2	11.0	10.1	10.3	ns
		nBn to nAn	19.9	16.6	15.5	14.6	ns
t_{dis}	Disable Time	$\overline{OE}$ to nAn	25.5	25.5	25.5	25.5	ns
		$\overline{OE}$ to nBn	29.0	18.6	14.9	14.4	ns
t_{en}	Enable Time	$\overline{OE}$ to nAn	34.6	34.6	34.6	34.6	ns
		$\overline{OE}$ to nBn	35.8	19.4	15.4	15.1	ns

Typical switching characteristics at $V_{CC(B)} = 0.8V$ and $T_A = 25^\circ C$ (unless otherwise noted)

Voltages are referenced to GND (ground = 0V); for test circuit see [Figure6](#); for wave forms see [Figure4](#) and [Figure5](#). t_{pd} is the same as t_{PLH} and t_{PHL} ; t_{dis} is the same as t_{PLZ} and t_{PHZ} ; t_{en} is the same as t_{PZL} and t_{PZH} .

Symbol	Parameter	Conditions	$V_{CC(A)}$				Unit
			0.8V	1.2V	1.8V	3.3V	
t_{pd}	Propagation Delay	nAn to nBn	21.2	15.8	14.6	13.6	ns
		nBn to nAn	19.9	11.5	9.1	9.9	ns
t_{dis}	Disable Time	$\overline{OE}$ to nAn	25.5	14.0	9.7	7.4	ns
		$\overline{OE}$ to nBn	29.0	28.0	26.4	25.4	ns
t_{en}	Enable Time	$\overline{OE}$ to nAn	34.6	13.8	7.8	4.9	ns
		$\overline{OE}$ to nBn	35.8	30.9	29.4	28.7	ns

ET74AVCH4T245

Dynamic Characteristics(Continued)

Voltages are referenced to GND (ground = 0V), $T_A = 25^\circ\text{C}$.

Symbol	Parameter	Conditions	$V_{CC(A)} = V_{CC(B)}$						Unit
			0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
C_{PD} ⁽¹²⁾ ⁽¹³⁾	Power Dissipation Capacitance	A Port: (Direction nAn to nBn); Output Enabled	0.34	0.25	0.30	0.37	0.76	1.48	pF
		A Port: (Direction nAn to nBn); Output Enabled	0.34	0.26	0.28	0.35	0.71	1.33	pF
		A Port: (Direction nAn to nBn); Output Enabled	7.02	9.09	10.51	11.80	14.13	16.43	pF
		A Port: (Direction nAn to nBn); Output Enabled	0.76	0.76	0.77	0.79	0.83	0.89	pF
		B Port: (Direction nAn to nBn); Output Enabled	6.63	9.09	10.51	11.80	14.13	16.43	pF
		B Port: (Direction nAn to nBn); Output Enabled	0.75	0.76	0.77	0.79	0.83	0.89	pF
		B Port: (Direction nAn to nBn); Output Enabled	0.35	0.25	0.30	0.37	0.76	1.48	pF
		B Port: (Direction nAn to nBn); Output Enabled	0.35	0.26	0.28	0.35	0.71	1.33	pF

Note12: C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f_i = Input Frequency in MHz;

f_o = Output Frequency in MHz;

C_L = Output Load capacitance in pF;

V_{CC} = Supply Voltage in V;

N = Number of Inputs Switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = Sum of Outputs.

Note13: $f_i = 10 \text{ MHz}$; $V_i = \text{GND to } V_{CC}$; $t_r = t_f = 1 \text{ ns}$; $C_L = 0 \text{ pF}$; $R_L = \infty \Omega$.

ET74AVCH4T245

Dynamic Characteristics(Continued)

Voltages are referenced to GND (ground = 0V), $T_A = -40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

Symbol	Parameter	Conditions	V _{CC(B)}						Unit
			1.2V ± 0.1V		1.8V ± 0.15V		3.3V ± 0.3V		
			Min	Max	Min	Max	Min	Max	
V _{CC(A)} = 1.1V to 1.3V									
t _{pd}	Propagation Delay	nAn to nBn	0.5	12.0	0.5	8.8	0.5	7.5	ns
		nBn to nAn	0.5	12.0	0.5	11.3	0.5	10.5	ns
t _{dis}	Disable Time	$\overline{OE}$ to nAn	0.5	17.18	0.5	17.1	0.5	17.1	ns
		$\overline{OE}$ to nBn	0.5	17.9	0.5	13.6	0.5	11.4	ns
t _{en}	Enable Time	$\overline{OE}$ to nAn	1.1	18.0	1.1	18.0	1.1	18.0	ns
		$\overline{OE}$ to nBn	1.1	20.0	1.1	15.0	1.0	8.0	ns
V _{CC(A)} = 1.65V to 1.95V									
t _{pd}	Propagation Delay	nAn to nBn	0.5	11.3	0.5	7.5	0.5	6.5	ns
		nBn to nAn	0.5	10.0	0.5	7.5	0.5	7.1	ns
t _{dis}	Disable Time	$\overline{OE}$ to nAn	0.5	12.73	0.5	12.7	0.5	12.7	ns
		$\overline{OE}$ to nBn	0.5	15.0	0.5	11.2	0.5	9.1	ns
t _{en}	Enable Time	$\overline{OE}$ to nAn	1.0	13.0	1.0	13.0	1.0	13.0	ns
		$\overline{OE}$ to nBn	1.1	17.4	1.0	12.0	0.5	10.5	ns
V _{CC(A)} = 3.0V to 3.6V									
t _{pd}	Propagation Delay	nAn to nBn	0.5	9.8	0.5	7.1	0.5	5.0	ns
		nBn to nAn	0.5	7.8	0.5	6.5	0.5	5.0	ns
t _{dis}	Disable Tim	$\overline{OE}$ to nAn	0.5	8.5	0.5	8.5	0.5	8.5	ns
		$\overline{OE}$ to nBn	0.5	14.5	0.5	9.6	0.5	8.2	ns
t _{en}	Enable Time	$\overline{OE}$ to nAn	0.5	6.8	0.5	6.8	0.5	6.8	ns
		$\overline{OE}$ to nBn	1.1	16.0	0.5	10.0	0.5	7.0	ns

ET74AVCH4T245


Dynamic Characteristics(Continued)

Voltages are referenced to GND (ground = 0V), T_A = -40°C ~ +125°C.

Symbol	Parameter	Conditions	V _{CC(B)}						Unit
			1.2V ± 0.1V		1.8V±0.15V		3.3V ± 0.3V		
			Min	Max	Min	Max	Min	Max	
V _{CC(A)} = 1.1V to 1.3V									
t _{pd}	Propagation Delay	nAn to nBn	0.5	12.5	0.5	9.3	0.5	8.0	ns
		nBn to nAn	0.5	12.5	0.5	11.8	0.5	11.0	ns
t _{dis}	Disable Time	$\overline{OE}$ to nAn	0.5	17.6	0.5	17.6	0.5	17.6	ns
		$\overline{OE}$ to nBn	0.5	18.4	0.5	14.1	0.5	11.9	ns
t _{en}	Enable Time	$\overline{OE}$ to nAn	1.1	18.5	1.1	18.5	1.1	18.5	ns
		$\overline{OE}$ to nBn	1.1	20.5	1.1	15.5	1.0	8.5	ns
V _{CC(A)} = 1.65V to 1.95V									
t _{pd}	Propagation Delay	nAn to nBn	0.5	11.8	0.5	8.0	0.5	7.0	ns
		nBn to nAn	0.5	10.5	0.5	8.0	0.5	7.6	ns
t _{dis}	Disable Time	$\overline{OE}$ to nAn	0.5	13.2	0.5	13.2	0.5	13.2	ns
		$\overline{OE}$ to nBn	0.5	15.5	0.5	11.7	0.5	9.6	ns
t _{en}	Enable Time	$\overline{OE}$ to nAn	1.0	13.5	1.0	13.5	1.0	13.5	ns
		$\overline{OE}$ to nBn	1.1	17.9	1.0	12.5	0.5	11.0	ns
V _{CC(A)} = 3.0V to 3.6V									
t _{pd}	Propagation Delay	nAn to nBn	0.5	10.3	0.5	7.6	0.5	5.5	ns
		nBn to nAn	0.5	8.3	0.5	7.0	0.5	5.5	ns
t _{dis}	Disable Time	$\overline{OE}$ to nAn	0.5	9.0	0.5	9.0	0.5	9.0	ns
		$\overline{OE}$ to nBn	0.5	15.0	0.5	10.4	0.5	8.7	ns
t _{en}	Enable Time	$\overline{OE}$ to nAn	0.5	7.3	0.5	7.3	0.5	7.3	ns
		$\overline{OE}$ to nBn	1.1	16.5	0.5	10.5	0.5	7.5	ns

ET74AVCH4T245


Test Circuit

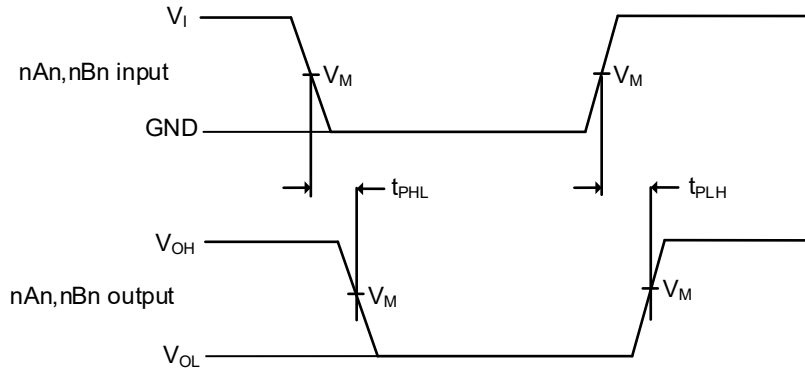

Measurement points are given in [Table 3](#).

V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure4. The data input (nAn, nBn) to output (nBn, nAn) propagation delay times

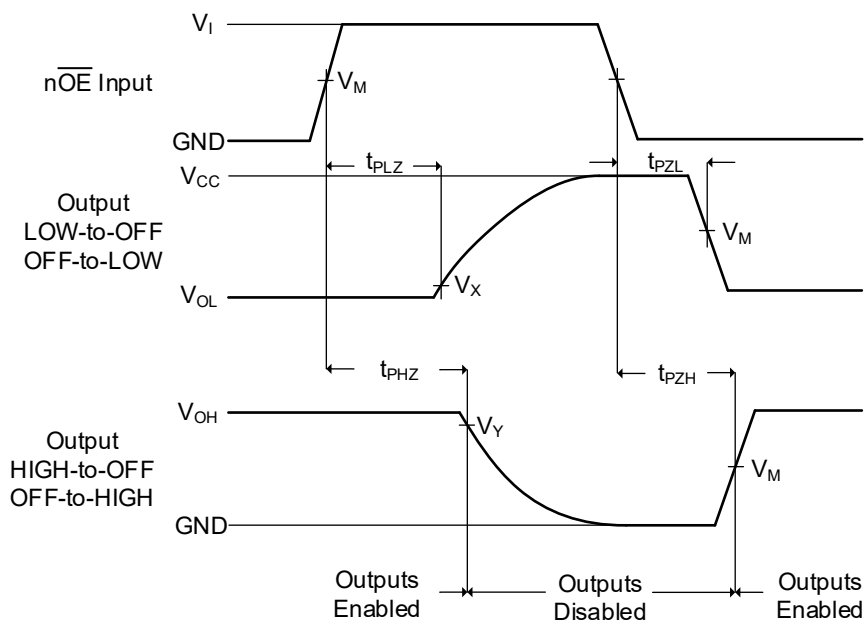

Measurement points are given in [Table 3](#).


V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure5. Enable and disable times

Table 3. Measurement Points

Supply Voltage	Input	Output		
$V_{CC(A)}, V_{CC(B)}$	V_M	V_M	V_X	V_Y
1.2V to 1.6V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.1V$	$V_{OH} - 0.1V$
1.65V to 2.7V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
3.0V to 3.6V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$

ET74AVCH4T245

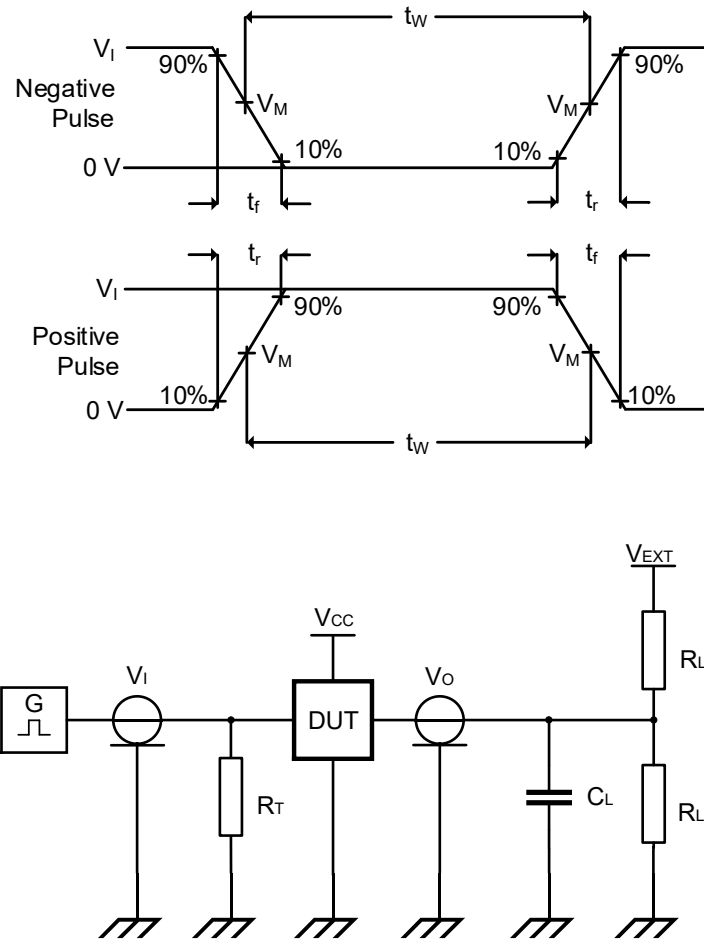

Measurement points are given in [Table 4](#).

Definitions test circuit:

R_L = Load resistance;

C_L = Load capacitance including jig and probe capacitance;

R_T = Termination resistance should be equal to output impedance Z_O of the pulse generator;

V_{EXT} = External voltage for measuring switching times.

Figure6. Test circuit for measuring switching times

Table4. Test Data


Supply Voltage	Input		Load		V_{EXT}		
$V_{CC(A)}, V_{CC(B)}$	V_I	$\Delta t/\Delta V^{(14)}$	C_L	R_L	t_{PLH}, t_{PHL}	t_{PZH}, t_{PHZ}	t_{PZL}, t_{PLZ}
0.8V to 1.6V	V_{CCI}	$\leq 1.0\text{ns/V}$	15pF	2k Ω	Open	GND	$2 \times V_{CCO}$
1.65V to 2.7V	V_{CCI}	$\leq 1.0\text{ns/V}$	15pF	2k Ω	Open	GND	$2 \times V_{CCO}$
3.0V to 3.6V	V_{CCI}	$\leq 1.0\text{ns/V}$	15pF	2k Ω	Open	GND	$2 \times V_{CCO}$

Note14: $dV/dt \geq 1.0 \text{ V/ns}$

ET74AVCH4T245

Package Dimension

TSSOP16(4.4mm × 5mm)

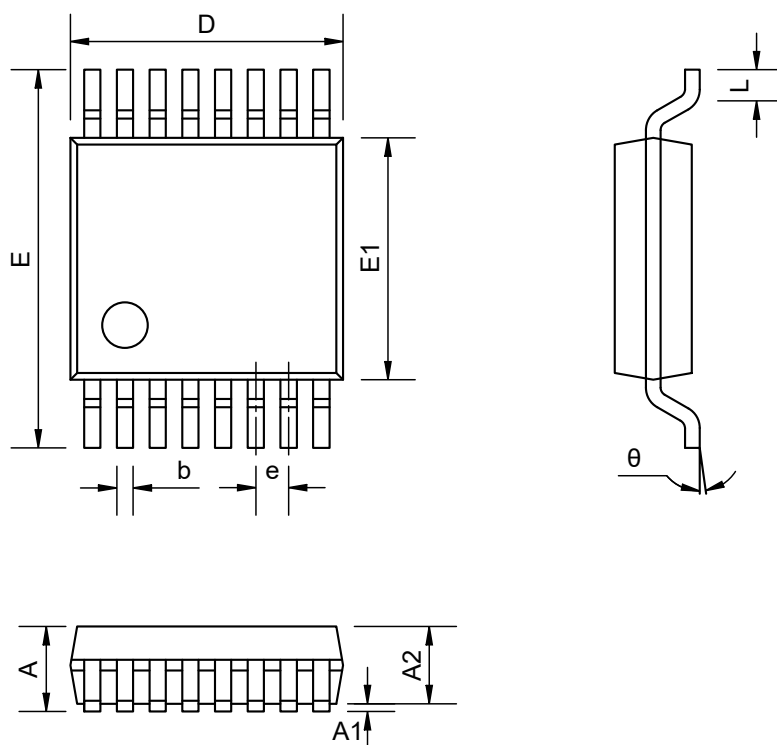


Dimensions Table (Units: mm)

Symbol	Min	Non	Max
A	--	--	1.10
A1	0.05	--	0.15
A2	0.80	--	1.00
b	0.19	--	0.30
D	4.90	5.00	5.10
E	6.25	6.40	6.55
E1	4.30	4.40	4.50
e	0.65 BSC		
L	0.50	0.60	0.70
θ	1°	--	7°

ET74AVCH4T245

QFN16(1.8mm × 2.6mm)

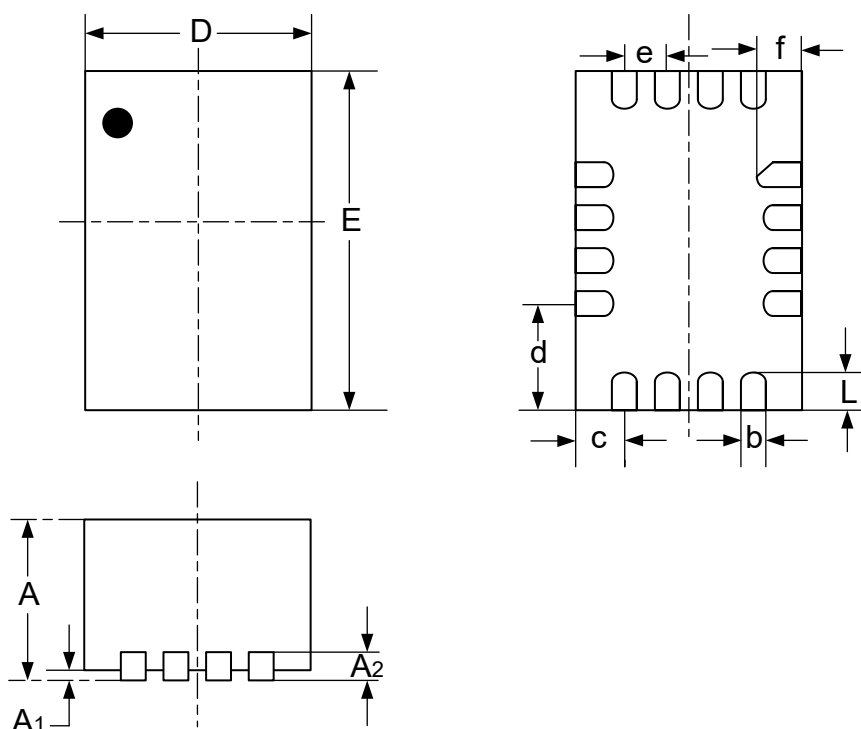


Dimensions Table (Units: mm)

SYMBOL	MIN	NOM	MAX
A	0.5	0.55	0.6
A ₁	0	-	0.05
A ₂	-	0.15	-
D	1.75	1.80	1.85
E	2.55	2.60	2.65
L	0.30	0.40	0.50
b	0.15	0.20	0.25
c	-	0.30	-
d	-	0.70	-
e	0.40BSC		
f	-	0.50	-

ET74AVCH4T245

SOP16(9.9mm × 3.9mm)

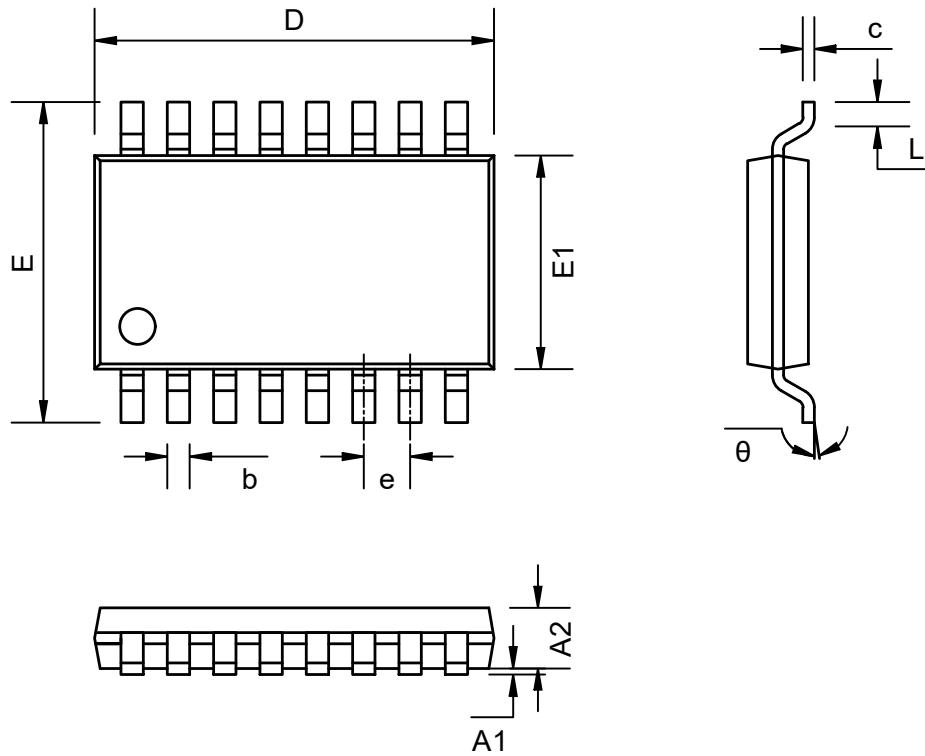

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A1	0.1	0.15	0.25
A2	1.35	1.45	1.55
b	0.36	--	0.51
c	0.18	--	0.25
D	9.80	9.90	10.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.22	1.27	1.32
L	0.45	0.60	0.80
θ	0°	--	8°

ET74AVCH4T245

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2024-10-29	Preliminary Version	Yuyifan	Lichenxuan	Liuji
1.0	2025-03-20	Official Version	Wanganran	Yangxiaoxu	Liuji
1.1	2025-08-20	Update Package	Wanganran	Yangxiaoxu	Liuji
1.2	2025-10-20	Update Format	Wanganran	Yangxiaoxu	Liuji