

ET5014 - 4 Bit 100 Mbps Configurable Level Translator

General Description

The ET5014 is a 4-bit bidirectional level translator in which the input and output ports are switched automatically without direction control. The data path of each channel can be either from I/O_V_{Ln} to I/O_V_{CcH} or from I/O_V_{CcH} to I/O_V_{Ln}. All of the I/O ports are designed to track two different power supply rails, V_{CC} and V_L respectively. Both of the supply voltage are configurable from 1.2V to 5.0V. The V_{CC} and V_L supplies are independent which allows a logic signal on the V_L side to be translated to either a higher or a lower logic signal voltage on the V_{CC} side, and vice-versa.

The ET5014 has high output current capability, which allows the translator to drive high capacitive loads such as most high frequency EMI filters. The enable pin(EN) is used to reduce the power consumption. The EN pin can be used to disable both I/O ports by putting them in 3-state which significantly reduces the supply current from both V_{CC} and V_L. The EN signal is referenced to the V_L supply.

Features

- Wide V_{CC}, V_L Operating Range: 1.2V to 5.0V
- V_L and V_{CC} are Independent
- V_L may be Greater than, Equal to, or Less than V_{CC}
- High 100 pF Capacitive Drive Capability
- High-Speed with 120 Mbps Guaranteed Data Rate for V_{CC}, V_L > 2.3V
- Low Bit-to-Bit Skew
- Over-voltage Tolerant Enable and I/O Pins
- Non-preferential Power Up Sequencing
- Power-Off Protection
- Small Packaging: QFN12 or QFN14
- These are Pb-Free Devices

Application


- Mobile Phones, PDAs
- Other Portable Devices

Device Information

Part No.	Package	Size
ET5014	QFN12	1.7mm x 2.0mm x 0.5mm
ET5014Y	QFN14	3.5mm x 3.5mm x 0.75mm

ET5014


Pin Configuration

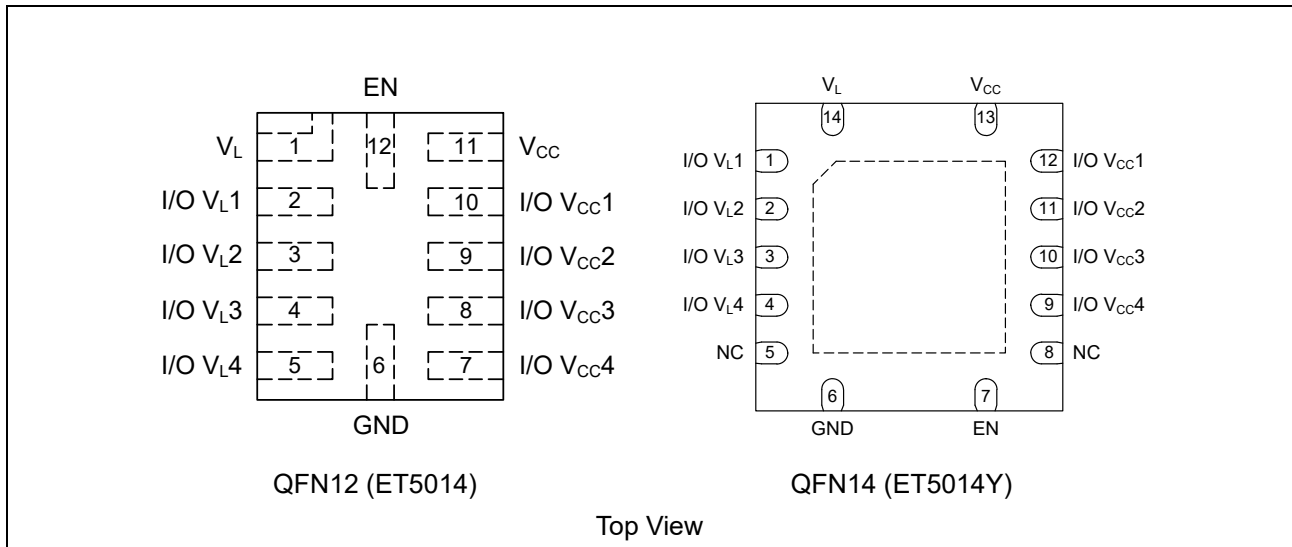


Pin Function

Pin Number		Pin Name	Description
QFN12 (ET5014)	QFN14 (ET5014Y)		
11	13	V _{CC}	V _{CC} Input Voltage
1	14	V _L	V _L Input Voltage
6	6	GND	Ground
12	7	EN	Output Enable
7~10	9~12	I/O V _{CCn}	I/O Port, Referenced to V _{CC}
2~5	1~4	I/O V _{Ln}	I/O Port, Referenced to V _L

Block Diagram

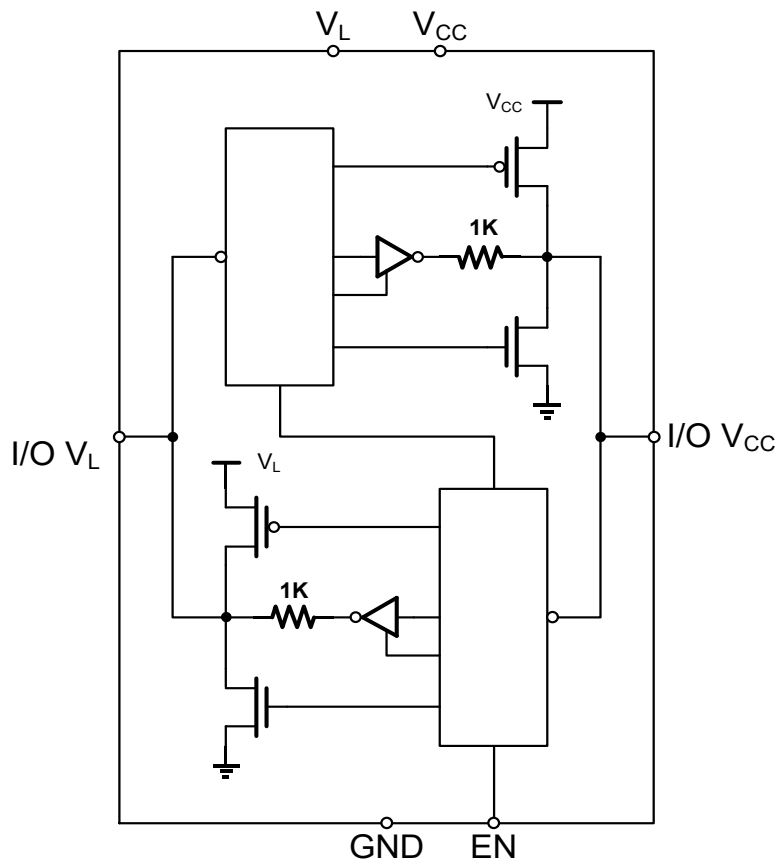

Simplified Functional Diagram (1 channel)

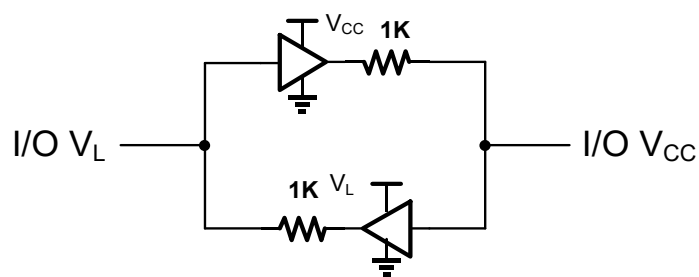

Logic Diagram (1 channel)

Figure 1.

Function Description

The ET5014 auto-sense translator provides bi-directional logic voltage level shifting to transfer data in multiple supply voltage systems. These level translators have two supply voltages, V_L and V_{CC} , which set the logic levels on the input and output sides of the translator. When used to transfer data from the I/O V_L to the I/O V_{CC} ports, input signals referenced to the V_L supply are translated to output signals with a logic level matched to V_{CC} . In a similar manner, the I/O V_{CC} to I/O V_L translation shifts input signals with a logic level compatible to V_{CC} to an output signal matched to V_L .

The ET5014 translator consists of bi-directional channels that independently determine the direction of the data flow without requiring a directional pin. One-shot circuits are used to detect the rising or falling input signals. In addition, the one-shots decrease the rise and fall times of the output signal for high-to-low and low-to-high transitions.

Auto-sense translators such as the ET5014 have a wide bandwidth, but a relatively small DC output current rating. The high bandwidth of the bi-directional I/O circuit is used to quickly transform from an input to an output driver and vice versa. The I/O ports have a modest DC current output specification so that the output driver can be over driven when data is sent in the opposite direction. For proper operation, the input driver to the auto-sense translator should be capable of driving 2 mA of peak output current. The bi-directional configuration of the translator results in both input stages being active for a very short time period. Although the peak current from the input signal circuit is relatively large, the average current is small and consistent with a standard CMOS input stage.

The ET5014 translator has an Enable pin (EN) that provides tri-state operation at the I/O pins. Driving the Enable pin to a low logic level minimizes the power consumption of the device and drives the I/O V_{CC} and I/O V_L pins to a high impedance state. Normal translation operation occurs when the EN pin is equal to a logic high signal. The EN pin is referenced to the V_L supply and has Over-Voltage Tolerant (OVT) protection.

The ET5014 translator can function as a non-inverting uni-directional translator. One advantage of using the translator as a uni-directional device is that each I/O pin can be configured as either an input or output. The configurable input or output feature is especially useful in applications such as SPI that use multiple uni-directional I/O lines to send data to and from a device. The flexible I/O port of the auto sense translator simplifies the trace connections on the PCB.

The values of the V_L and V_{CC} supplies can be set to anywhere between 1.1V and 5.0V. Design flexibility is maximized because V_L may be either greater than or less than the V_{CC} supply. In contrast, the majority of the competitive auto sense translators has a restriction that the value of the V_L supply must be equal to less than $(V_{CC} - 0.4) V$.

The sequencing of the power supplies will not damage the device during power-up operation. In addition, the I/O V_{CC} and I/O V_L pins are in the high impedance state if either supply voltage is equal to 0V. For optimal performance, 0.01uF to 0.1uF decoupling capacitors should be used on the V_L and V_{CC} power supply pins. Ceramic capacitors are a good design choice to filter and bypass any noise signals on the voltage lines to the ground plane of the PCB. The noise immunity will be maximized by placing the capacitors as close as possible to the supply and ground pins, along with minimizing the PCB connection traces.

ET5014

The ET5014 translators have a power down feature that provides design flexibility. The output ports are disabled when either power supply is off (V_L or $V_{CC} = 0V$). This feature causes all of the I/O pins to be in the power saving high impedance state.

About Pull-Up/Pull-Down Resistors

Do not use any pull-up or pull-down resistors. This device has bus-hold circuits: pull-up or pull-down resistors are not recommended because they interfere with the output state. The current through these resistors may exceed the hold drive's bus-hold current (see figure below), resulting in data transition and/or auto-direction sensing failures. The bus-hold feature eliminates the need for extra resistors.

Input Driver Requirements

For correct operation, the device driving the data I/Os of the ET5014 must have a minimum drive capability of ± 5 mA (see figure below) for a plot of typical input current versus input voltage.

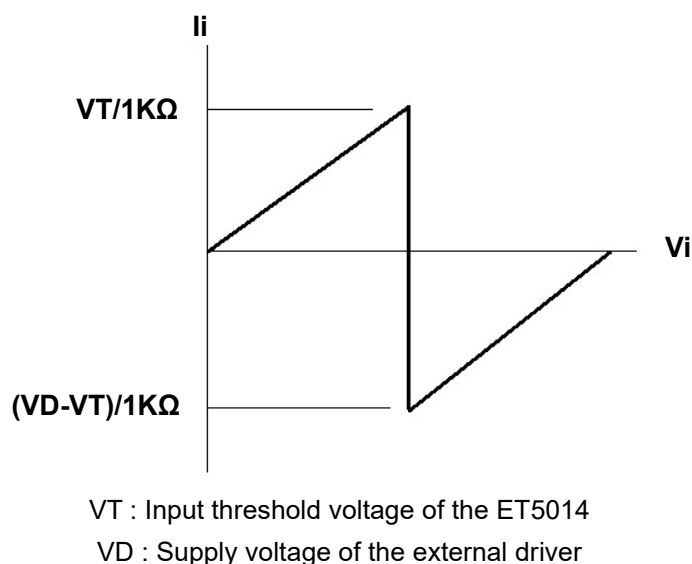


Figure 2.

ET5014

Absolute Maximum Ratings

Symbol	Parameter	Condition	Value	Unit
V _{CC}	High-side DC Supply Voltage		-0.5 to +5.5	V
V _L	Low-side DC Supply Voltage		-0.5 to +5.5	V
I/O V _{CC}	V _{CC} -Referenced DC Input/Output Voltage		-0.5 to +5.5	V
I/O V _L	V _L -Referenced DC Input/Output Voltage		-0.5 to +5.5	V
V _I	Enable Control Pin DC Input Voltage		-0.5 to +5.5	V
I _{IK}	DC Input Diode Current	V _I < GND	-50	mA
I _{OK}	DC Output Diode Current	V _O < GND	-50	mA
I _{CC}	DC Supply Current Through V _{CC}		±100	mA
I _L	DC Supply Current Through V _L		±100	mA
I _{GND}	DC Ground Current Through Ground Pin		±100	mA
T _{JMAX}	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature		-65 to +150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter		Min	Max	Unit
V _{CC}	High-side Positive DC Supply Voltage		1.2	5.0	V
V _L	Low-side Positive DC Supply Voltage		1.2	5.0	V
V _I	Enable Control Pin Voltage		GND	5.0	V
V _{IO}	Bus Input/Output Voltage	I/O V _{CC}	GND	5.0	V
		I/O V _L	GND	5.0	
T _A	Operating Temperature Range		-40	+85	°C
Δt/ΔV	Input Transition Rise or Rate V _I , V _{IO} from 30% to 70% of V _{CC} ; V _{CC} = 3.3 V ± 0.3 V		0	10	ns

ET5014

DC Electrical Characteristics

(Note: V_S is the corresponding supply for IO, i.e. V_{CC} for IO_ V_{CC} and V_L for IO_ V_L)

Symbol	Parameter	Test Conditions ⁽¹⁾	V_{CC} ⁽²⁾	V_L ⁽³⁾	-40 to +85°C			-55 to +125°C		Unit
					Min	Typ ⁽⁴⁾	Max	Min	Max	
V_{IH}	I/O Input High Voltage		1.2-5.0 1.5-5.0	1.2-5.0 1.5-5.0	$0.8 \cdot V_S$ $2/3 \cdot V_S$	- -	- -	$0.8 \cdot V_S$ $2/3 \cdot V_S$	- -	V
V_{IL}	I/O Input Low Voltage		1.2-5.0 1.5-5.0	1.2-5.0 1.5-5.0	- -	- -	$0.2 \cdot V_S$ $1/3 \cdot V_S$	- -	$0.2 \cdot V_S$ $1/3 \cdot V_S$	V
V_{IH-EN}	EN Input High Voltage	$T_A = +25^\circ\text{C}$	1.2-5.0 1.5-5.0	1.2-5.0 1.5-5.0	$0.8 \cdot V_S$ $2/3 \cdot V_S$	-	-	$0.8 \cdot V_S$ $2/3 \cdot V_S$	-	V
V_{IL-EN}	EN Input Low Voltage	$T_A = +25^\circ\text{C}$	1.2-5.0 1.5-5.0	1.2-5.0 1.5-5.0	-	-	$0.2 \cdot V_S$ $1/3 \cdot V_S$	-	$0.2 \cdot V_S$ $1/3 \cdot V_S$	V
V_{OH}	I/O Output High Voltage	I/O source current = 20uA	1.2-5.0	1.2-5.0	$0.9 \cdot V_S$	-	-		-	V
V_{OL}	I/O Output Low Voltage	I/O source current = 20uA	1.2-5.0	1.2-5.0	-	-	0.2	-	0.2	V
I_Q	Static Supply Current	EN= V_L , $I_O=0$ A, I/O_IN=0V or V_S , I/O_OUT= float	1.2-5.0	1.2-5.0	-	-	1	-	2.5	uA
I_{TS}	Tristate Output Mode Supply Current	$T_A = +25^\circ\text{C}$, EN=0 V, I/O_IN=0 V or V_S , I/O_OUT = float	1.2-5.0	1.2-5.0	-	-	0.5	-	1.5	uA
I_{OZ}	I/O Tristate Output Mode Leakage Current	$T_A = +25^\circ\text{C}$, EN = 0 V	1.2-5.0	1.2-5.0	-	-	± 1	-	± 1.5	uA
I_I	EN Pin Input Current	$T_A = +25^\circ\text{C}$	1.2-5.0	1.2-5.0	-	-	± 1	-	± 1	uA
I_{OFF}	Power off Leakage Current	I/O $V_{CC} = 0$ to V_{CC} , I/O $V_L = 0$ to V_L	0	0	-	-	1	-	1.5	uA
			1.2-5.0	0	-	-	1	-	1.5	
			0	1.2-5.0	-	-	1	-	1.5	

Notes:

1. Normal test conditions are $V_I = 0$ V, $C_{IOVCC} \leq 15$ pF and $C_{IOVL} \leq 15$ pF, unless otherwise specified.
2. V_{CC} is the supply voltage associated with the I/O V_{CC} port, and V_{CC} ranges from +1.2V to 5.0V under normal operating conditions.
3. V_L is the supply voltage associated with the I/O V_L port, and V_L ranges from +1.2V to 5.0V under normal operating conditions.
4. Typical values are for $V_{CC} = +2.8$ V, $V_L = +1.8$ V and $T_A = +25^\circ\text{C}$. All units are production tested at $T_A = +25^\circ\text{C}$. Limits over the operating temperature range are guaranteed by design.

ET5014

Timing Characteristics

Symbol	Parameter		Test Conditions ⁽⁵⁾	V _{CC} ⁽⁶⁾	V _L ⁽⁷⁾	-55 to +125°C			Unit
						Min	Typ ⁽⁸⁾	Max	
T _R	I/O Rise Time		C _{IO} =15pF	1.2-5.0	1.2-5.0			9.5	ns
				1.8-5.0	1.8-5.0			7.5	
T _F	I/O Fall Time		C _{IO} =15pF	1.2-5.0	1.2-5.0			9.5	ns
				1.8-5.0	1.8-5.0			7.5	
Z _{OVCC}	I/O V _{CC} One-Shot Output Impedance		(9)	1.8	1.2-5.0		20		Ω
				5.0			6.0		
Z _{OVL}	I/O V _L One-Shot Output Impedance		(9)	1.2-5.0	1.8		20		Ω
					5.0		6.0		
t _{PD}	Propagation Delay (Driving I/O V _{CC} or I/O V _L)		C _{IOVCC} =15pF	1.2-5.0	1.2-5.0			35	ns
				1.8-5.0	1.8-5.0			10	
			C _{IOVCC} =30pF	1.2-5.0	1.2-5.0			35	
				1.8-5.0	1.8-5.0			15	
			C _{IOVCC} =50pF	1.2-5.0	1.2-5.0			37	
				1.8-5.0	1.8-5.0			15	
			C _{IOVCC} =100pF	1.2-5.0	1.2-5.0			53	
				1.8-5.0	1.8-5.0			24	
t _{SK}	Channel-to-Channel Skew		C _{IOVCC} = 15pF C _{IOVL} = 15pF (9)	1.2-5.0	1.2-5.0			0.15	ns
I _{IN_PEAK}	Input Driver Maximum Peak Current		EN = V _L ; I/O_V _{CC} = 1MHz Square Wave, Amplitude = V _{CC} , or I/O_V _L = 1MHz Square Wave, Amplitude = V _L (9)	1.2-5.0	1.2-5.0			5.0	mA
t _{EN}	I/O Output Enable Time	t _{PZH}	C _{IO} = 15pF, I/O_V _L = V _L	1.2-5.0	1.2-5.0			180	ns
		t _{PZL}	C _{IO} = 15pF, I/O_V _L = 0V	1.2-5.0	1.2-5.0			170	
t _{DIS}	I/O Output Disable Time	t _{PHZ}	C _{IO} = 15pF, I/O_V _L = V _L	1.2-5.0	1.2-5.0			210	ns
		t _{PLZ}	C _{IO} = 15pF, I/O_V _L = 0V	1.2-5.0	1.2-5.0			175	
MDR	Maximum Data Rate		C _{IO} =15pF	1.2-5.0	1.2-5.0	16			Mbps
				1.5-5.0	1.5-5.0	60			
				2.3-5.0	2.3-5.0	140			
			C _{IO} =30pF	1.2-5.0	1.2-5.0	16			
				1.5-5.0	1.5-5.0	60			
				2.3-5.0	2.3-5.0	120			
			C _{IO} =50pF	1.2-5.0	1.2-5.0	16			
				1.5-5.0	1.5-5.0	60			
				2.3-5.0	2.3-5.0	100			



ET5014


		$C_{IO}=100\text{pF}$	1.2-5.0	1.2-5.0	16			
			1.5-5.0	1.5-5.0	40			
			2.3-5.0	2.3-5.0	60			

Notes:

- Normal test conditions are $V_I = 0\text{V}$, $C_{IOVCC} \leq 15\text{pF}$ and $C_{IOVL} \leq 15\text{pF}$, unless otherwise specified.
- V_{CC} is the supply voltage associated with the I/O V_{CC} port, and V_{CC} ranges from +1.2V to 5.0V under normal operating conditions.
- V_L is the supply voltage associated with the I/O V_L port, and V_L ranges from +1.2V to 5.0V under normal operating conditions.
- Typical values are for $V_{CC} = 2.8\text{V}$, $V_L = 1.8\text{V}$ and $T_A = +25^\circ\text{C}$. All units are production tested at $T_A = +25^\circ\text{C}$. Limits over the operating temperature range are guaranteed by design.
- Guaranteed by design.

Test Circuit and Timing

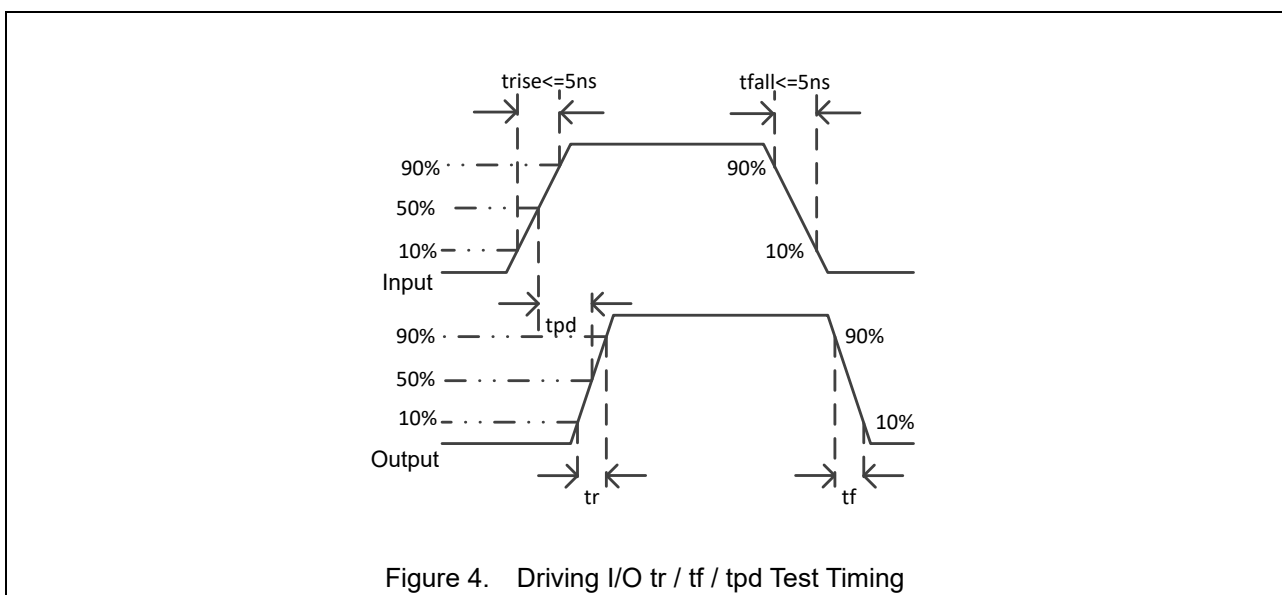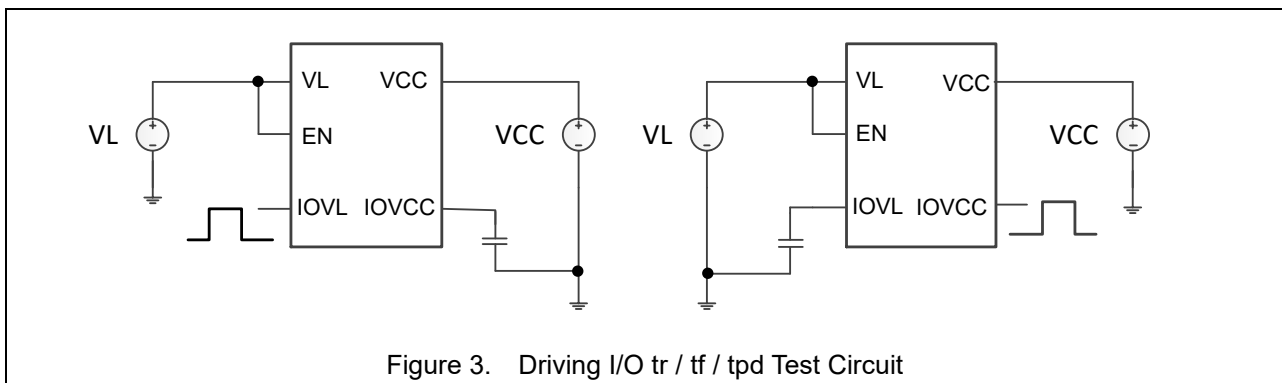

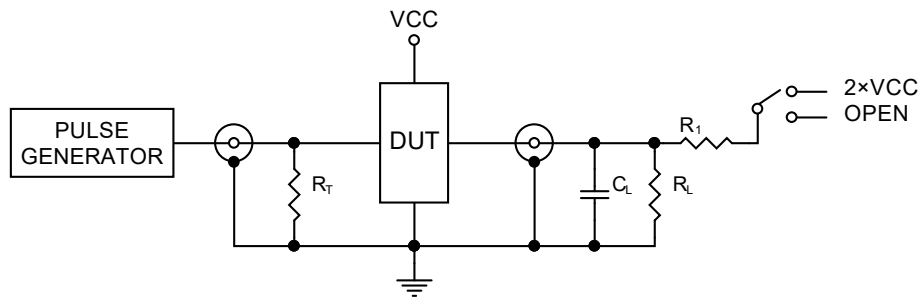

Test	Switch
t_{PZH} , t_{PHZ}	Open
t_{PZL} , t_{PLZ}	$2 \times V_{CC}$

$C_L = 15\text{pF}$ or equivalent (Includes jig and probe capacitance)

$R_L = R_1 = 50\text{k}\Omega$ or equivalent

$R_T = Z_{OUT}$ of pulse generator (typically 50Ω)

Figure 5. Enable/Disable Test Circuit

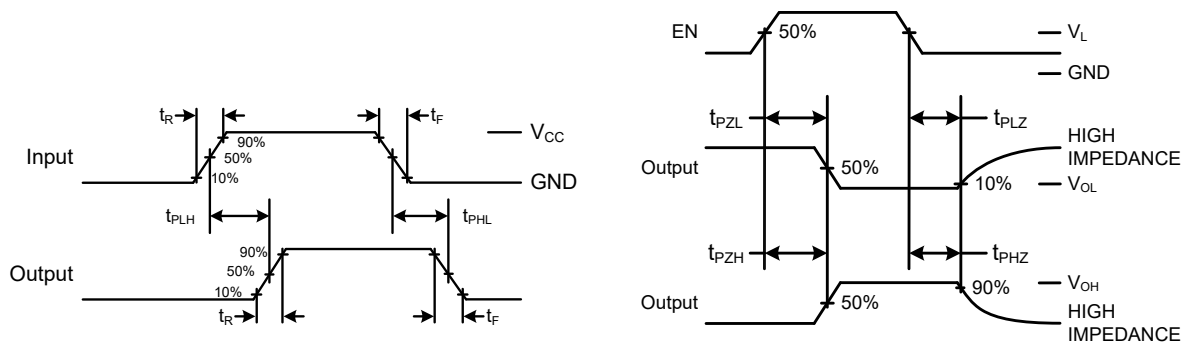


Figure 6. Enable/Disable Test Timing

Typical Application Circuits

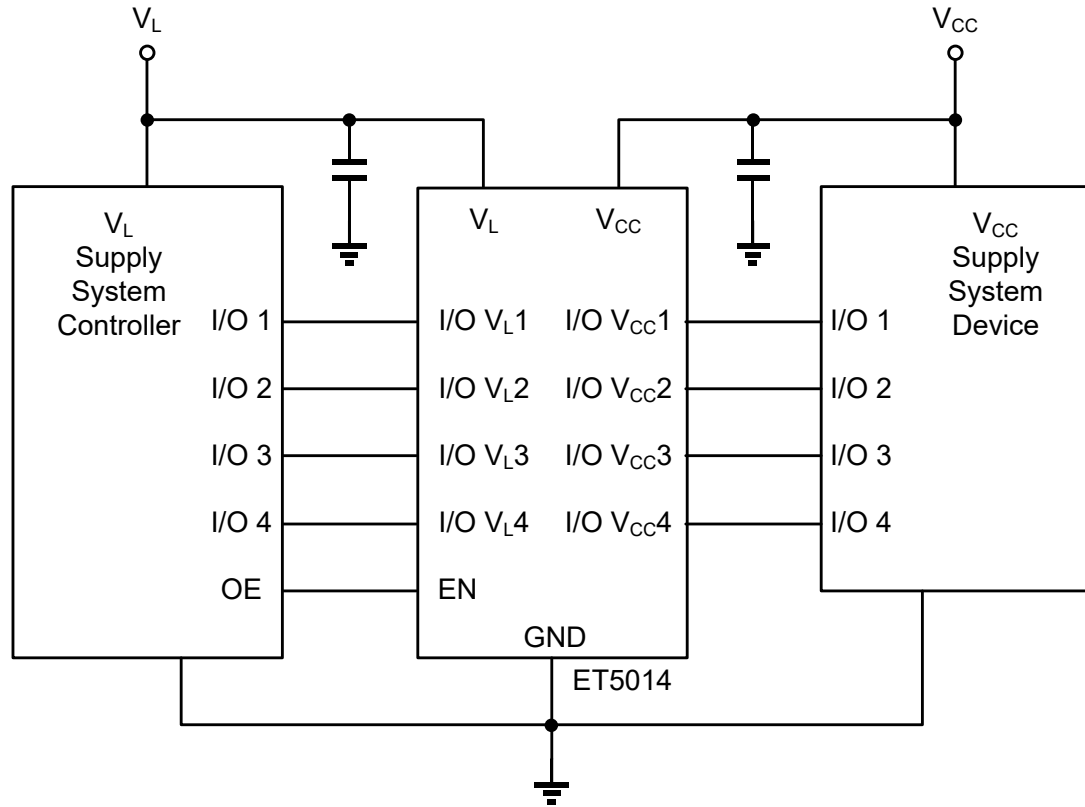




Figure 7. Typical Application Circuit

*: This electric circuit only supplies for reference.

ET5014

Package Dimension

QFN12

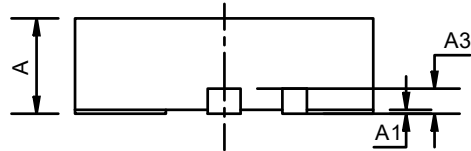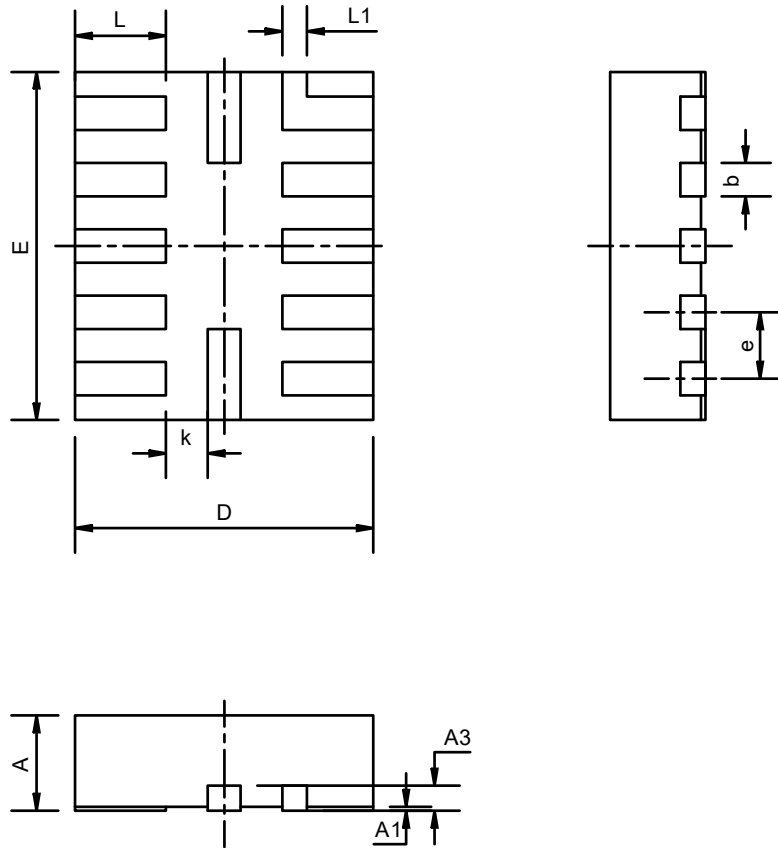


Dimensions Table (Units:mm)

Symbol	Min	Max
A	0.450	0.550
A1	0.000	0.050
A3	0.152 REF.	
b	0.150	0.250
D	1.600	1.800
E	1.900	2.100
e	0.400 TYP.	
L	0.450	0.550
L1	0.150 REF.	
k	0.200 MIN.	

ET5014


QFN14

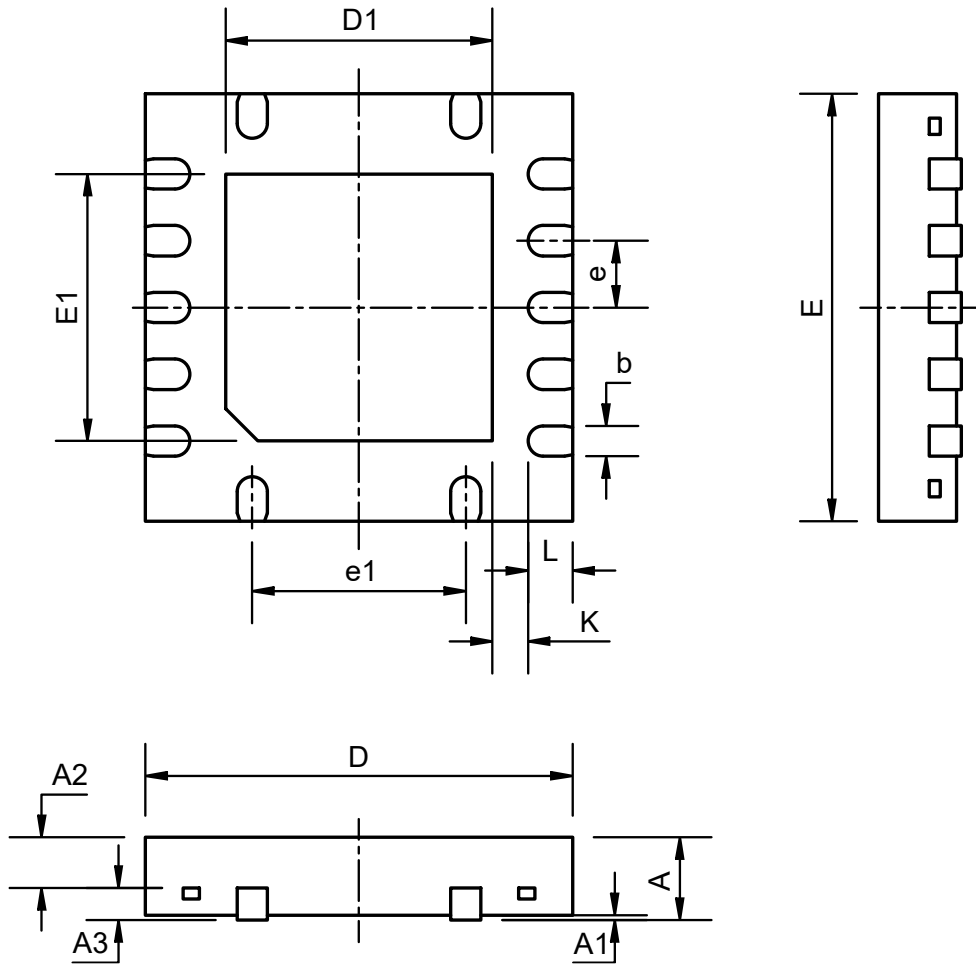

Dimensions Table (Units:mm)

Symbol	Min	Typ	Max	Symbol	Min	Typ	Max
A	0.7	0.75	0.8	e	0.5 BSC		
A1	0	0.02	0.05	e1	1.5 BSC		
A2	--	0.55	--	D1	1.9	2	2.1
A3	0.203 REF			E1	1.9	2	2.1
b	0.2	0.25	0.3	L	0.3	0.4	0.5
D	3.5 BSC			K	0.325 REF		
E	3.5 BSC						

Tape Information (QFN12)

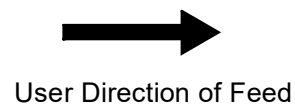

Unit: mm

ET5014

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2017-05-24	Original Version	Ma Yong Jian	Ma Yong Jian	Zhuji
1.1	2018-03-15	Remove others package	Ma Yong Jian	Ma Yong Jian	Zhuji
1.2	2018-06-28	Update some spec	Ma Yong Jian	Ma Yong Jian	Liuji
1.3	2018-11-06	Add QFN14 package	Ma Yong Jian	Ma Yong Jian	Liuji
1.4	2019-07-23	Update AC/DC table and package size Add Tape	Ma Yong Jian	Ma Yong Jian	Zhuji
1.5	2023-06-16	Update Form	Shi Bo	Shi liang jun	Liuji