

ET536XX - High PSRR Low Noise 300mA LDO

General Description

The ET536XX family are the 300mA LDO with auto discharge function. It uses an advanced CMOS process and a PMOSFET pass device to achieve high power supply rejection ratio (PSRR), low noise, low dropout, low ground current, fast start-up and excellent output accuracy.

The ET536XX family are stable with a 1.0 μ F ceramic output capacitor, uses a precision voltage reference and feedback loop to achieve excellent Regulation and transient response.

The ET536XX family offered in a small SOT23-5 and DFN4 package, which are ideal for small form factor portable equipment.

Features

- Wide Input Voltage Range from 1.9V to 5.5V
- Up to 300mA Load Current
- Standard Fixed Output Voltage :1.05V, 1.1V, 1.2V, 1.5V, 1.8V, 2.4V, 2.5V, 2.8V, 3.0V and 3.3V etc.
- Very Low I_Q is 45 μ A typical
- Low Dropout is typical 200mV@2.8V at 300mA Load
- Very High PSRR: 75dB at 1KHz
- Very Low Noise is 40uVrms at 1.2V output
- Excellent Load/Line Transient Response
- Offered DFN4 (1 $\times$ 1) or SOT23-5 packages

Applications

- Smart Phones and Cellular Phones
- Digital Still Cameras
- Portable instrument

ET536XX


Device Information

ET 536 XX X X

<u>XX</u> Output Voltage		<u>X</u> Package		<u>B</u> Auto-Discharging Function	
XX	Output Voltage For example, 18 is 1.8V output	Y	DFN4(1×1)	B	Auto-discharging available
		Blank	SOT23-5		

Part No.	Package	Packing Option	MSL
ET536XXYB	DFN4 (1×1)	Tape and Reel, 10K/Reel	1
ET536XXB	SOT23-5	Tape and Reel, 3K/Reel	3

Pin Configuration

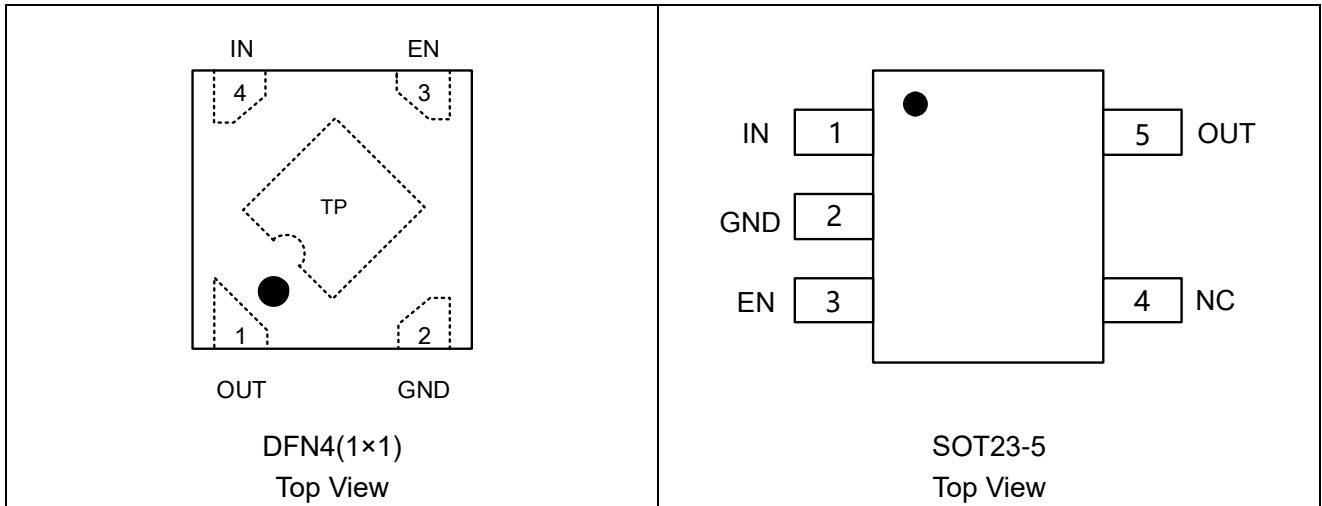


Pin Function

Pin No.		Pin Name	Pin Function
DFN4	SOT23-5		
1	5	OUT	Output pin. A 1μF low-ESR capacitor should be connected to this pin to ground.
2	2	GND	Ground
3	3	EN	Enable control input, active high. Do not leave EN floating
4	1	IN	Supply input pin. Must be closely decoupled to GND with a 1μF or greater ceramic capacitor
TP		Thermal Pad	Thermal pad for DFN4(1×1) package, connect to GND or leave floating. Do not connect to any potential other than GND.
	4	NC	No connection.

ET536XX

Block Diagram

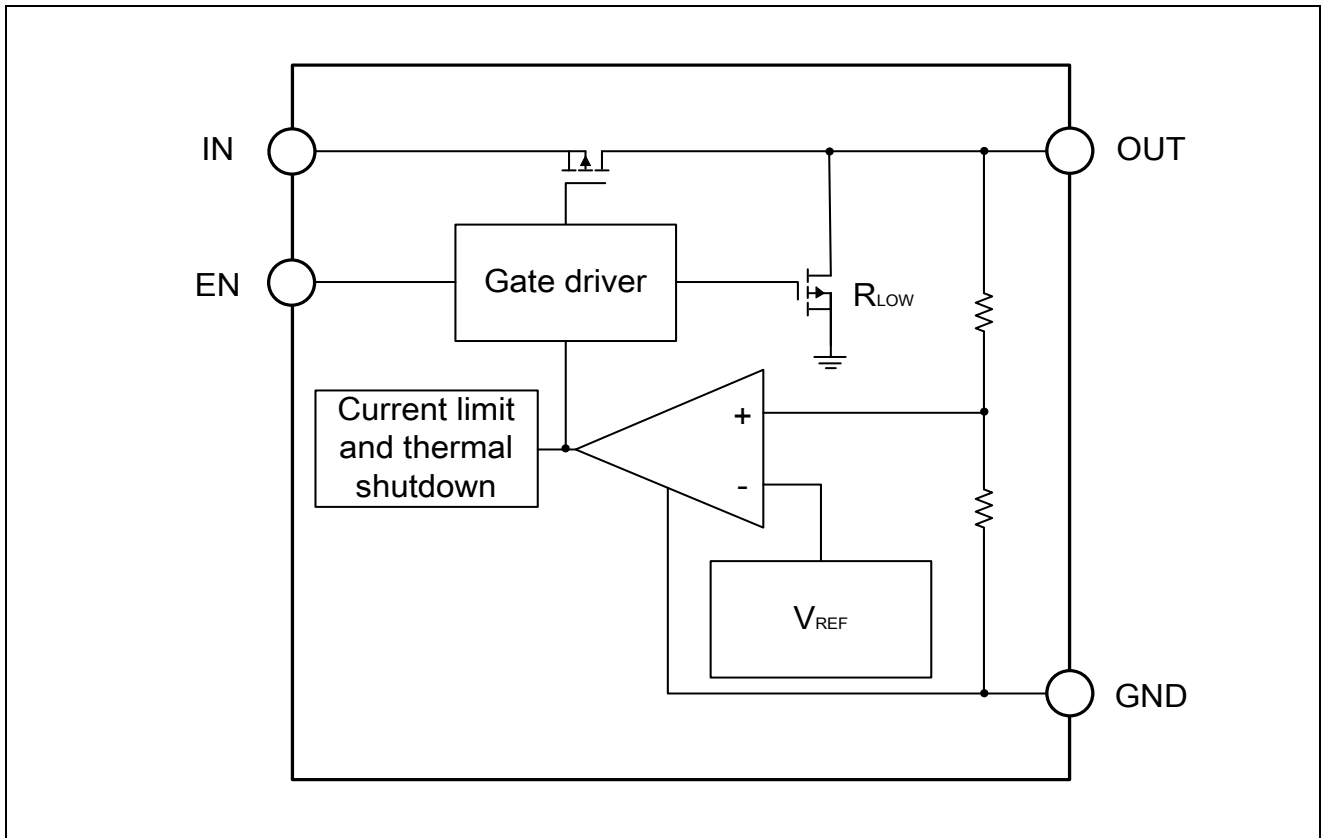

Functional Description

Input Capacitor

A $1\mu\text{F}$ ceramic capacitor is recommended to connect between VIN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both VIN and GND.

Output Capacitor

An output capacitor is required for the stability of the LDO. The recommended output capacitance is from $0.47\mu\text{F}$ to $4.7\mu\text{F}$, Equivalent Series Resistance (ESR) is from $5\text{m}\Omega$ to $100\text{m}\Omega$, and temperature characteristics is X7R or X5R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to OUT and GND pins.

ON/OFF Input Operation

The ET536XX is turned on by setting the EN pin high, and is turned off by pulling it low. If this feature is not used, the EN pin should be tied to IN pin to keep the regulator output on at all time.

Ultra Fast Start-up

After enabled, the ET536XX is able to provide full power in as little as tens of microseconds, typically $80\mu\text{s}$.

ET536XX

This feature will help load circuitry move in and out of standby mode in real time, eventually extend battery life for mobile phones and other portable devices.

Current Limit Protection

When output current at the OUT pin is higher than current limit threshold or the OUT pin, the current limit protection will be triggered and clamp the output current to approximately 500mA to prevent over-current and to protect the regulator from damage due to overheating.

Thermal shutdown Protection

Thermal protection disables the output when the junction temperature rises to approximately +155°C, allowing the device to cool down. When the junction temperature reduces to approximately +130°C the output circuitry is enabled again. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This cycling limits the heat dissipation of the regulator, protecting it from damage due to overheating.

Absolute Maximum Ratings

Symbol	Parameters (Items)		Value	Unit
V _{IN}	IN Voltage		-0.3 to 6.5	V
V _{EN}	Input Voltage (EN Pin)		-0.3 to V _{IN} +0.3	V
V _{OUT}	Output Voltage		-0.3 to V _{IN} +0.3	V
I _{MAX}	Maximum Load Current		500	mA
P _D	Maximum Power Consumption	DFN4	400	mW
		SOT23-5	400	
V _{ESD}	Human Body Model (JEDEC JS-001)		±4000	V
	Charged Device Model (JESD22-C101)		±1500	
R _{θJA}	Junction-to-ambient thermal resistance		250	°C/W
T _J	Operating Junction Temperature		-40 to 150	°C
T _{STG}	Storage Temperature		-65 to 150	°C
T _{SLOD}	Lead Temperature (Soldering, 10 sec)		300	°C

Recommended Operating Conditions

Symbol	Parameters	Rating	Unit
V _{IN}	Input Voltage	1.9 to 5.5	V
I _{OUT}	Output Current	0 to 300	mA
T _A	Operating Ambient Temperature	-40 to 85	°C
C _{IN}	Effective Input Ceramic Capacitor Value	0.47 to 4.7	μF
C _{OUT}	Effective Output Ceramic Capacitor Value	0.47 to 4.7	μF
ESR	Input and Output Capacitor Equivalent Series Resistance (ESR)	5 to 100	mΩ

ET536XX

Electrical Characteristics⁽¹⁾

($V_{IN}=V_{OUT}+1V$, $V_{EN}=1.2V$, $I_{OUT}=1mA$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise stated)

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		1.9		5.5	V
V_{DROP}	Dropout Voltage	$V_{OUT}=1.2V$, $I_{OUT}=300mA$ ⁽²⁾		320	420	mV
		$V_{OUT}=1.5V$, $I_{OUT}=300mA$		240	340	mV
		$V_{OUT}=1.8V$, $I_{OUT}=300mA$		180	280	mV
		$V_{OUT}=2.5V$, $I_{OUT}=300mA$		160	260	mV
		$V_{OUT}=2.8V$, $I_{OUT}=300mA$		145	240	mV
		$V_{OUT}=3.0V$, $I_{OUT}=300mA$		140	230	mV
		$V_{OUT}=3.3V$, $I_{OUT}=300mA$		135	220	mV
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$		45	70	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$		0.01	1	μA
V_{OUT}	Regulated Output Voltage	$I_{OUT}=1mA$, $-40^\circ C \leq T_A \leq 85^\circ C$	-2		2	%
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=V_{OUT}+1V$ to 5.5V, $I_{OUT}=10mA$		0.03	0.2	%/V
	Output Voltage Load Regulation	I_{OUT} from 0mA to 300mA		20	40	mV
t_s	Soft-start Time	From enable to power on		50		μs
I_{LIMIT}	Current Limit	$R_{LOAD}=1\Omega$	300			mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$		90		mA
PSRR	Power Supply Rejection Ratio ⁽³⁾	$f=1kHz$, $C_{OUT}=1\mu F$, $I_{OUT}=20mA$		75		dB
		$f=10kHz$, $C_{OUT}=1\mu F$, $I_{OUT}=30mA$		65		dB
e_n	Output Noise ⁽³⁾	10Hz to 100kHz, $I_{OUT}=200mA$, $V_{OUT}=2.8V$, $C_{OUT}=1\mu F$		25		μV_{RMS}
		10Hz to 100kHz, $I_{OUT}=200mA$, $V_{OUT}=1.2V$, $C_{OUT}=1\mu F$		20		
V_{IL}	EN Low Threshold	$V_{IN}=1.9V$ to 5.5V, V_{EN} falling until the output is disabled			0.3	V
V_{IH}	EN High Threshold	$V_{IN}=1.9V$ to 5.5V, V_{EN} rising until the output is enabled	1.2			V

ET536XX

Electrical Characteristics⁽¹⁾(Continued)

($V_{IN}=V_{OUT}+1V$, $V_{EN}=1.2V$, $I_{OUT}=1mA$, $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^{\circ}C$, unless otherwise stated)

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
I_{EN}	EN Pin Input Current	$V_{EN}=5.5V$		0	0.1	μA
R_{PD}	EN pull-down resistance		0.8	1	1.3	$M\Omega$
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$		130		Ω
T_{SD}	Over-temperature Shutdown Threshold ⁽³⁾	T_J rising		150		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis ⁽³⁾	T_J falling from shutdown		20		$^{\circ}C$

Note1: Production test at 25°C. Specifications over the temperature range are guaranteed by design and characterization.

Note2: The minimum operating voltage is 1.9V. $V_{DROP}=V_{IN} (min)-V_{OUT}$.


Note3: Guaranteed by design and characterization. not a FT item.

ET536XX


Typical Characteristics

(1) VOLTAGE VERSION 1.2 V


($V_{IN}=2.2V$; $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=25^{\circ}C$.)

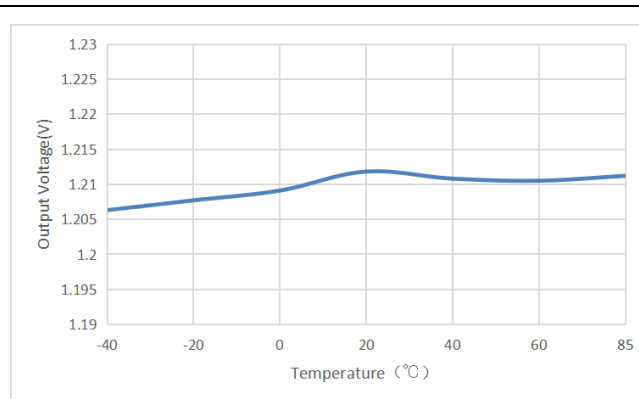


Output Voltage VS Temperature

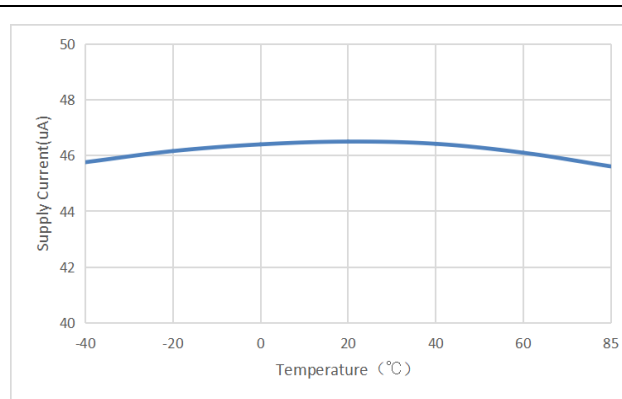


Supply Current VS Temperature

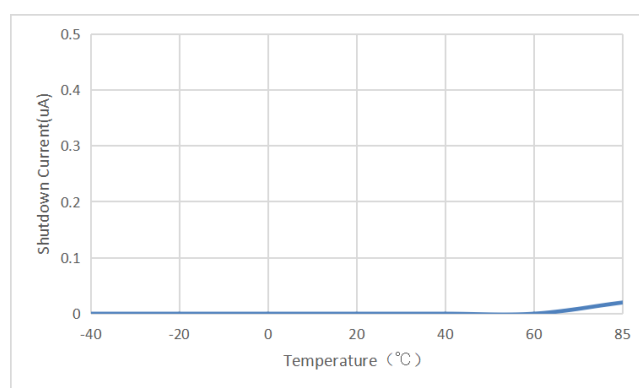


Shutdown Current VS Temperature

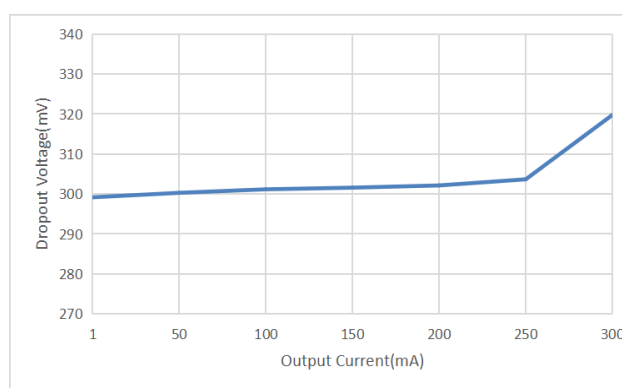

Dropout Voltage VS Output Current

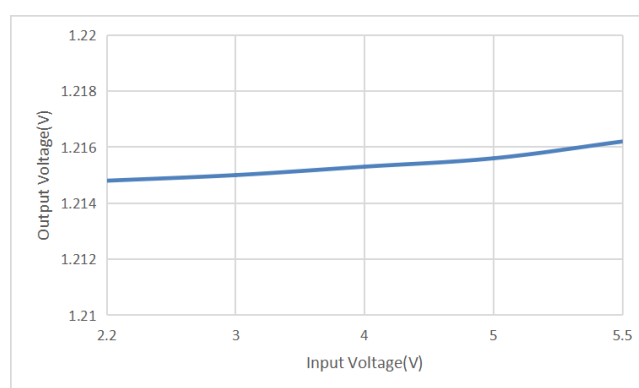


Output Voltage VS Input Voltage($I_{OUT}=10mA$)

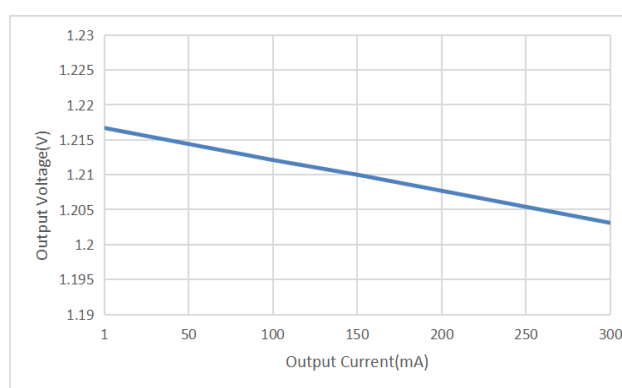


Output Voltage VS Output Current


ET536XX

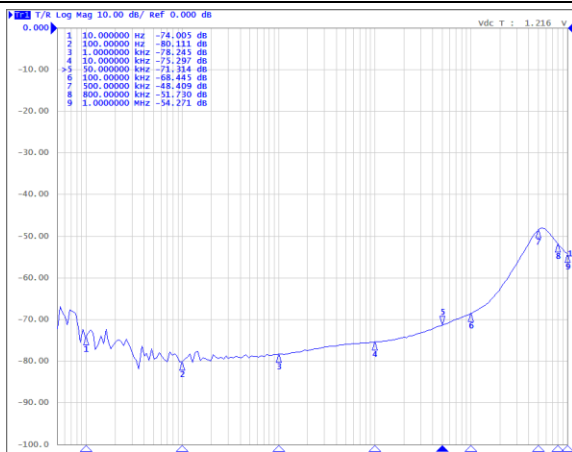


PSRR VS Output Current($I_{OUT}=30\text{mA}$)

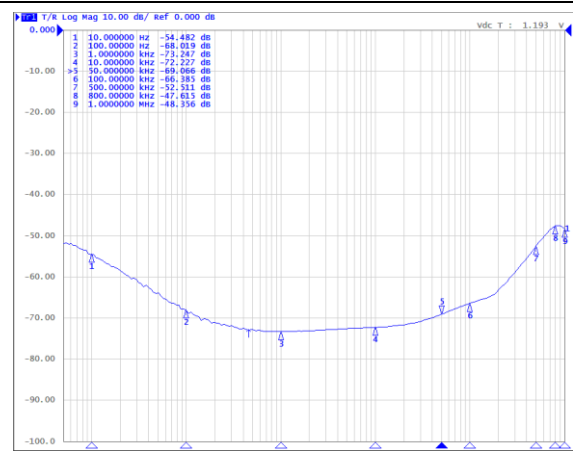


PSRR VS Output Current($I_{OUT}=150\text{mA}$)

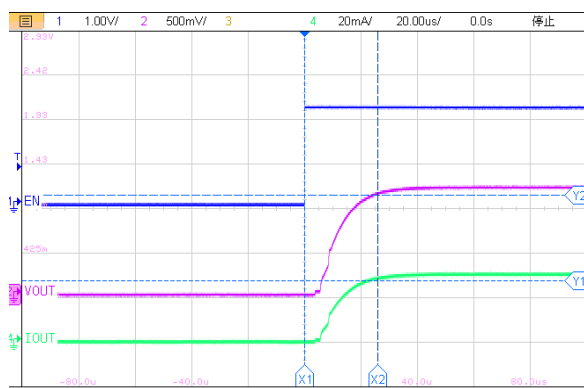

Turn On Speed VS EN Voltage ($I_{OUT}=30\text{mA}$)

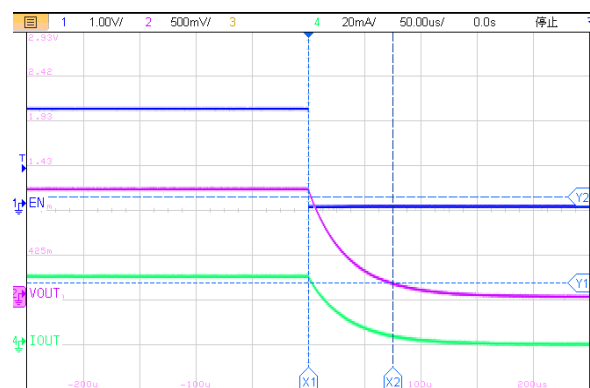


Turn Off Speed VS EN Voltage ($I_{OUT}=30\text{mA}$)

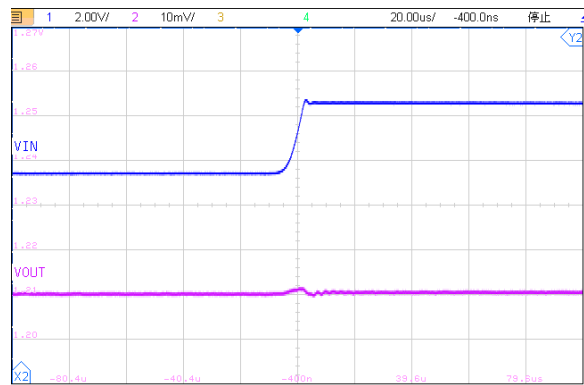

Line Transient Response


$V_{IN}=2.2\text{V}\sim 5.5\text{V}$, $V_{OUT}=1.2\text{V}$, $I_{OUT}=1\text{mA}$

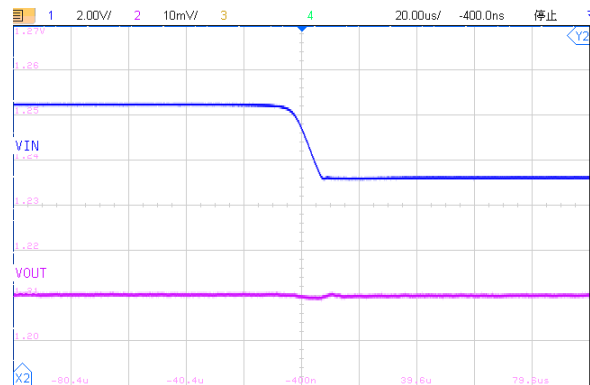

Line Transient Response


$V_{IN}=5.5\text{V}\sim 2.2\text{V}$, $V_{OUT}=1.2\text{V}$, $I_{OUT}=1\text{mA}$

ET536XX

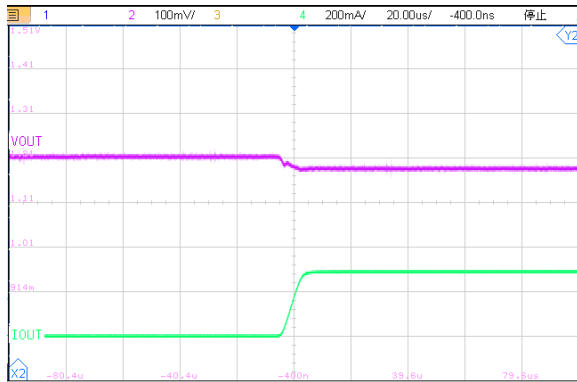

Load Transient Response

$V_{IN}=2.2V$, $V_{OUT}=1.2V$, $I_{OUT}=1mA \sim 300mA$

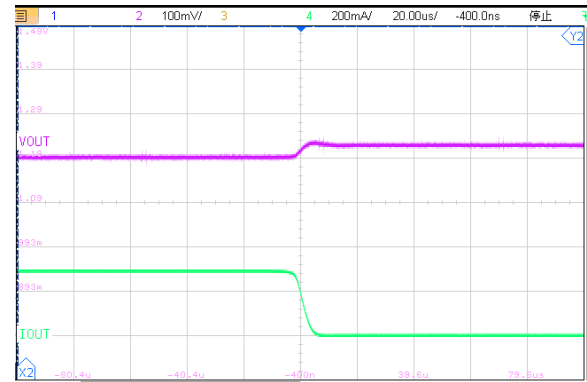


Load Transient Response


$V_{IN}=2.2V$, $V_{OUT}=1.2V$, $I_{OUT}=300mA \sim 1mA$

(2) VOLTAGE VERSION 1.8 V


($V_{IN}=2.8V$; $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=25^\circ C$.)

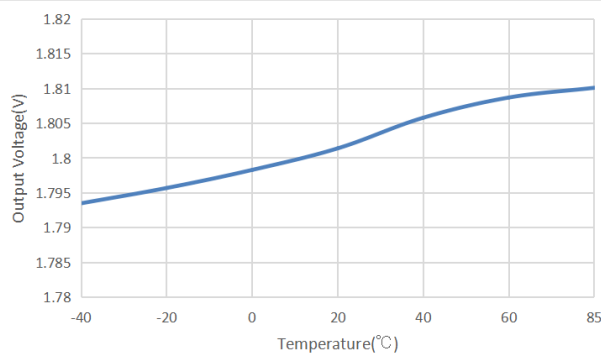


Output Voltage VS Temperature

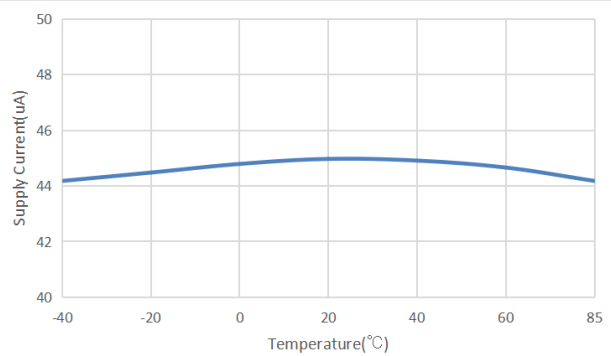

Supply Current VS Temperature

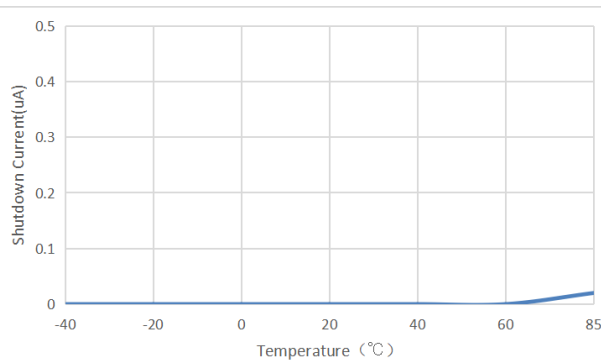


Shutdown Current VS Temperature

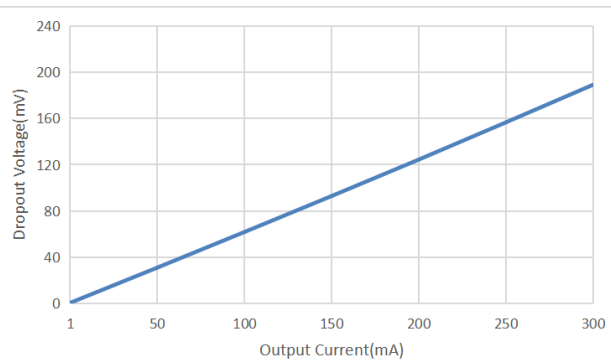


Dropout Voltage VS Output Current


ET536XX

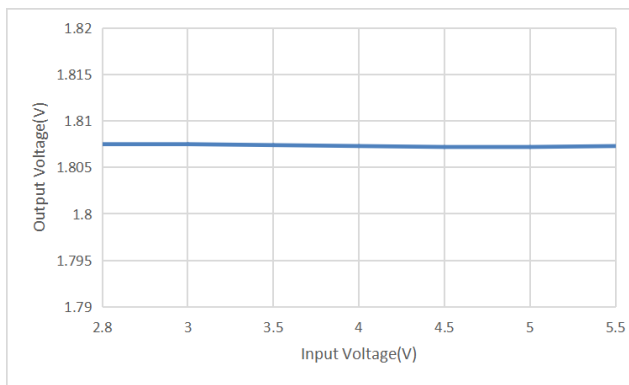


Output Voltage VS Input Voltage(I_{OUT}=10mA)

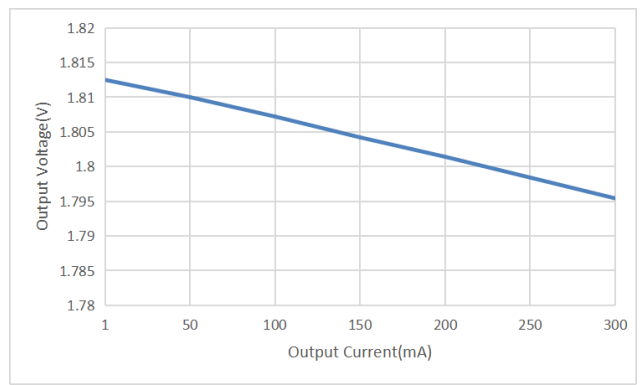


Output Voltage VS Output Current

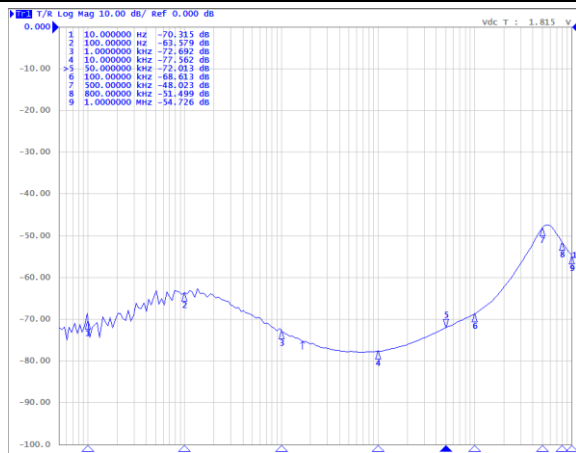


PSRR VS Output Current(I_{OUT}=30mA)

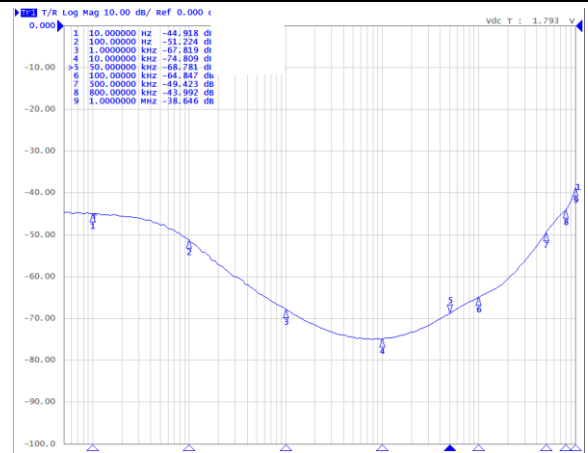

PSRR VS Output Current(I_{OUT}=150mA)

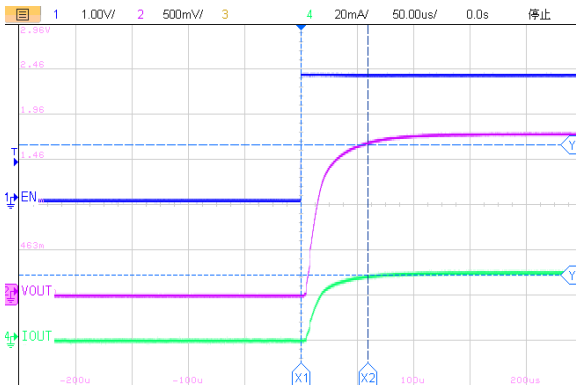


Turn On Speed VS EN Voltage (I_{OUT}=30mA)

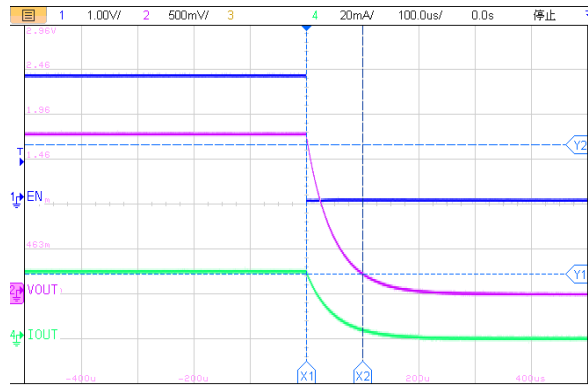


Turn Off Speed VS EN Voltage (I_{OUT}=30mA)


ET536XX

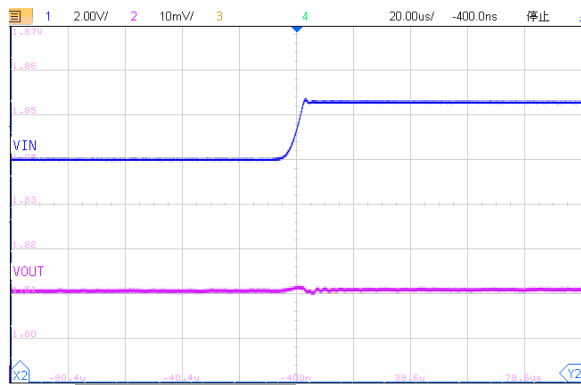


Line Transient Response
 $V_{IN}=2.8V \sim 5.5V$, $V_{OUT}=1.8V$, $I_{OUT}=1mA$

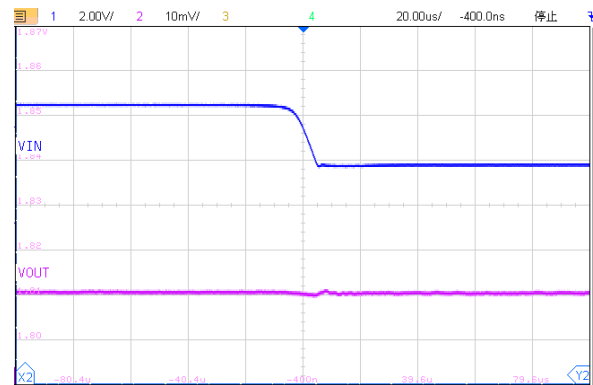

Line Transient Response
 $V_{IN}=5.5V \sim 2.8V$, $V_{OUT}=1.8V$, $I_{OUT}=1mA$

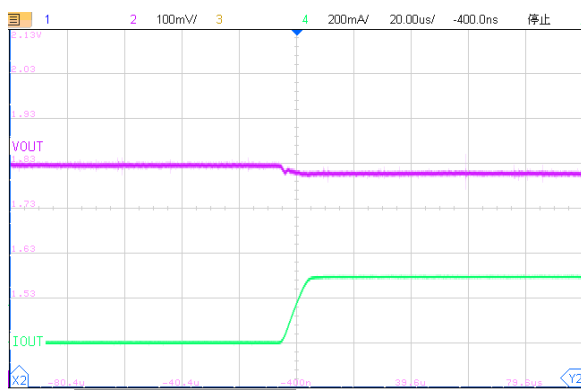


Load Transient Response
 $V_{IN}=2.8V$, $V_{OUT}=1.8V$, $I_{OUT}=1mA \sim 300mA$

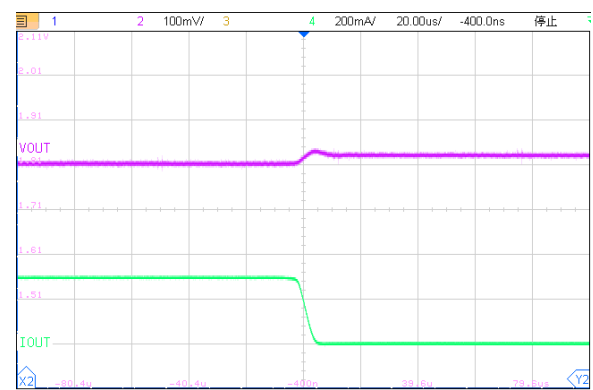


Load Transient Response
 $V_{IN}=2.8V$, $V_{OUT}=1.8V$, $I_{OUT}=300mA \sim 1mA$

(3) VOLTAGE VERSION 3.3 V

($V_{IN}=3.3V$; $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=25^\circ C$.)

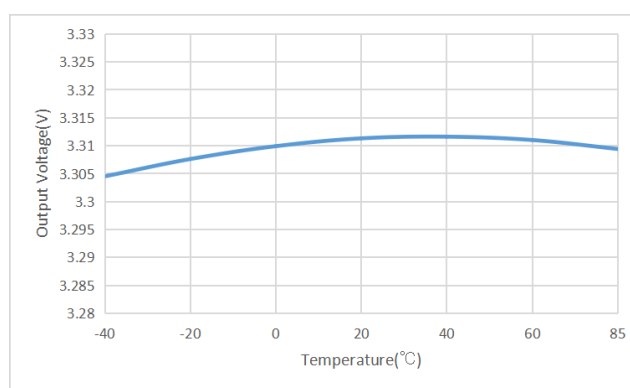


Output Voltage VS Temperature

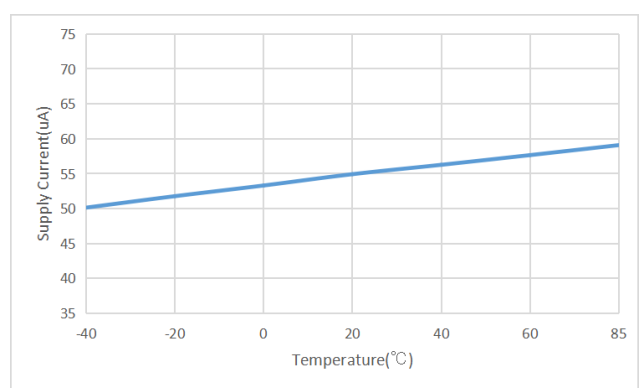


Supply Current VS Temperature


ET536XX

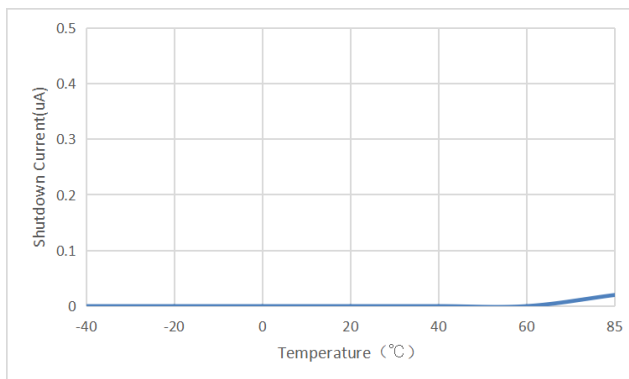


Shutdown Current VS Temperature

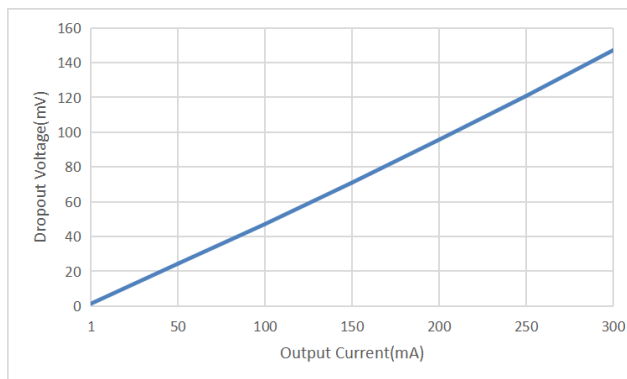


Dropout Voltage VS Output Current

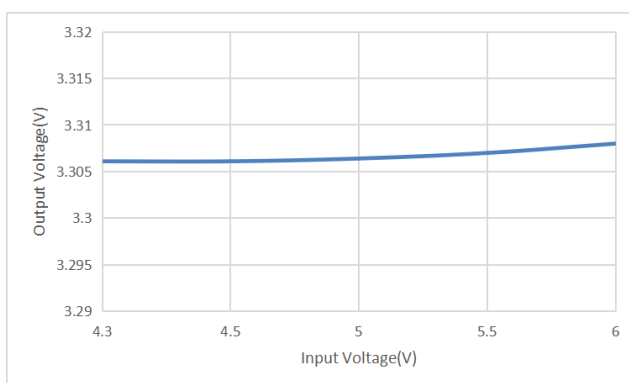


Output Voltage VS Input Voltage

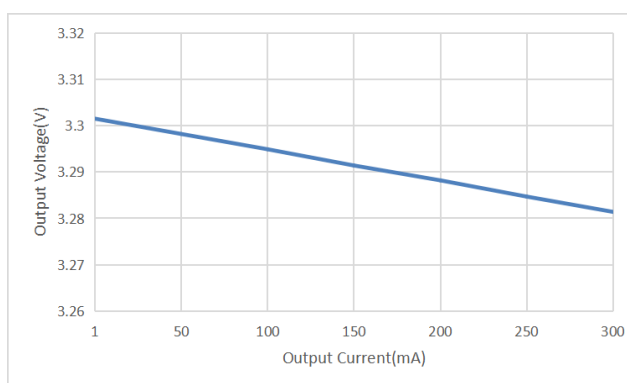

Output Voltage VS Output Current

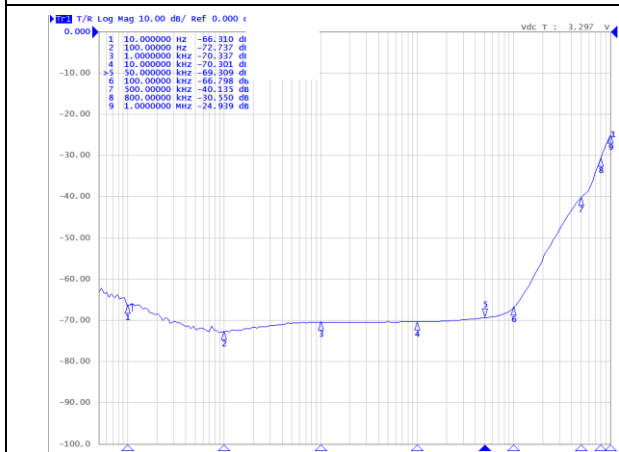


PSRR VS Output Current($I_{OUT}=30\text{mA}$)

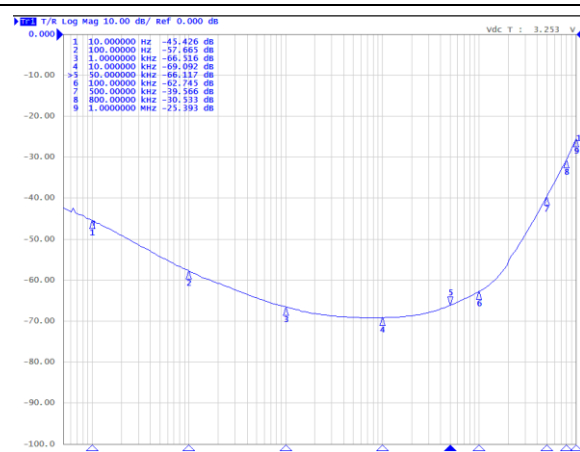


PSRR VS Output Current($I_{OUT}=150\text{mA}$)


ET536XX

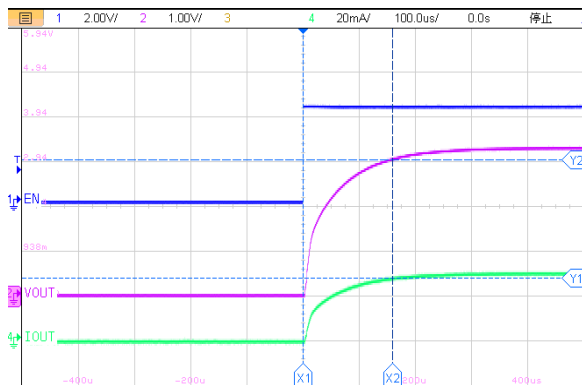


Turn On Speed VS EN Voltage ($I_{OUT}=30mA$)

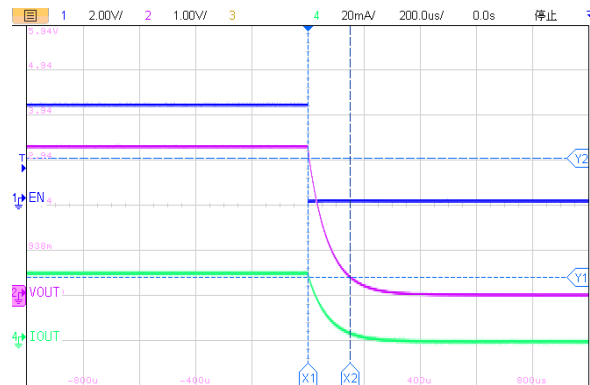


Turn Off Speed VS EN Voltage ($I_{OUT}=30mA$)

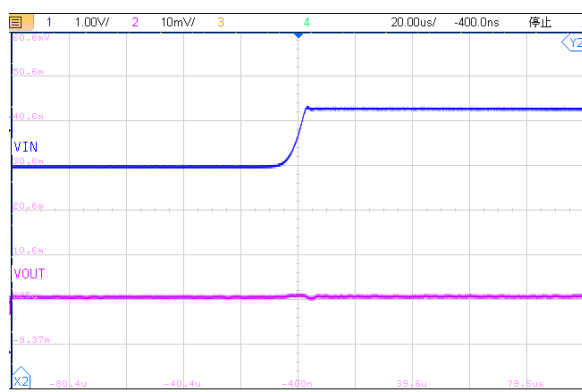


Line Transient Response
 $V_{IN}=4.3V\sim5.5V$, $V_{OUT}=3.3V$, $I_{OUT}=1mA$

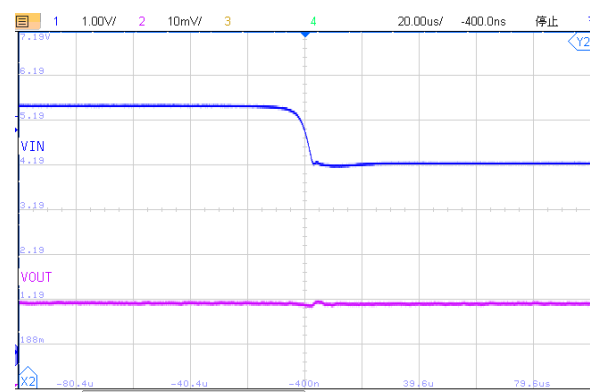

Line Transient Response
 $V_{IN}=5.5V\sim4.3V$, $V_{OUT}=3.3V$, $I_{OUT}=1mA$

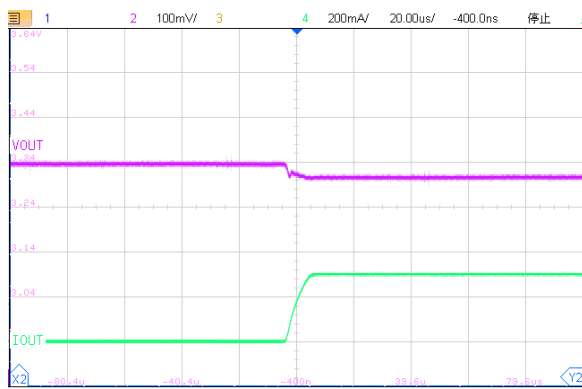


Load Transient Response
 $V_{IN}=4.3V$, $V_{OUT}=3.3V$, $I_{OUT}=1mA\sim300mA$

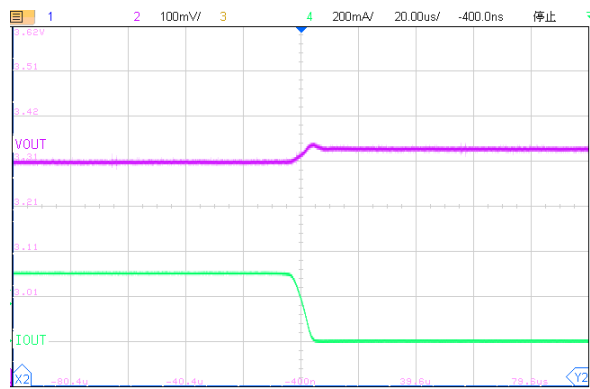

Load Transient Response
 $V_{IN}=4.3V$, $V_{OUT}=3.3V$, $I_{OUT}=300mA\sim1mA$

ET536XX


Application Circuits

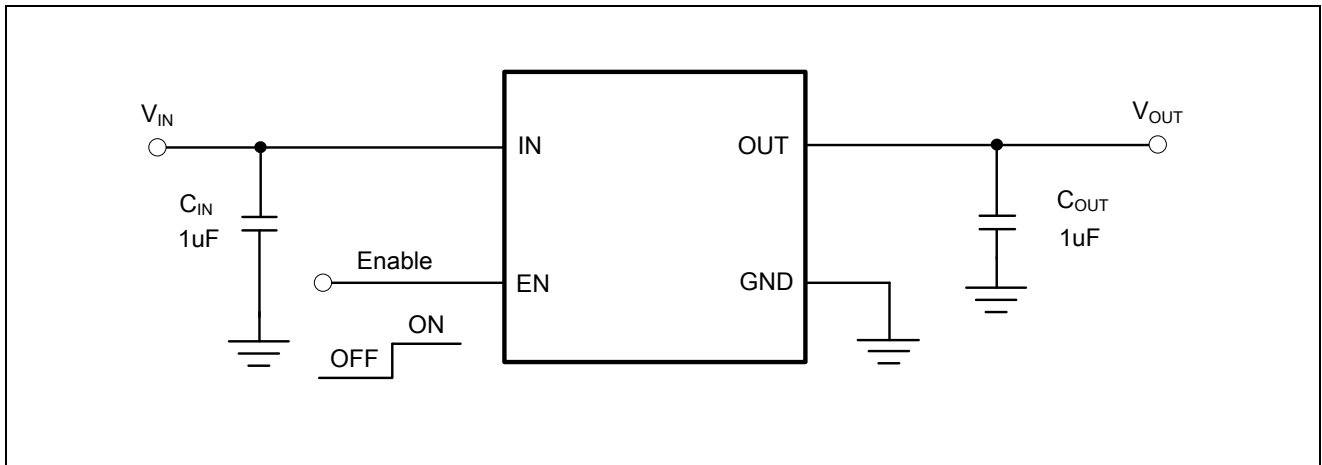


ET536XX

PCB Layout Guide

DFN4

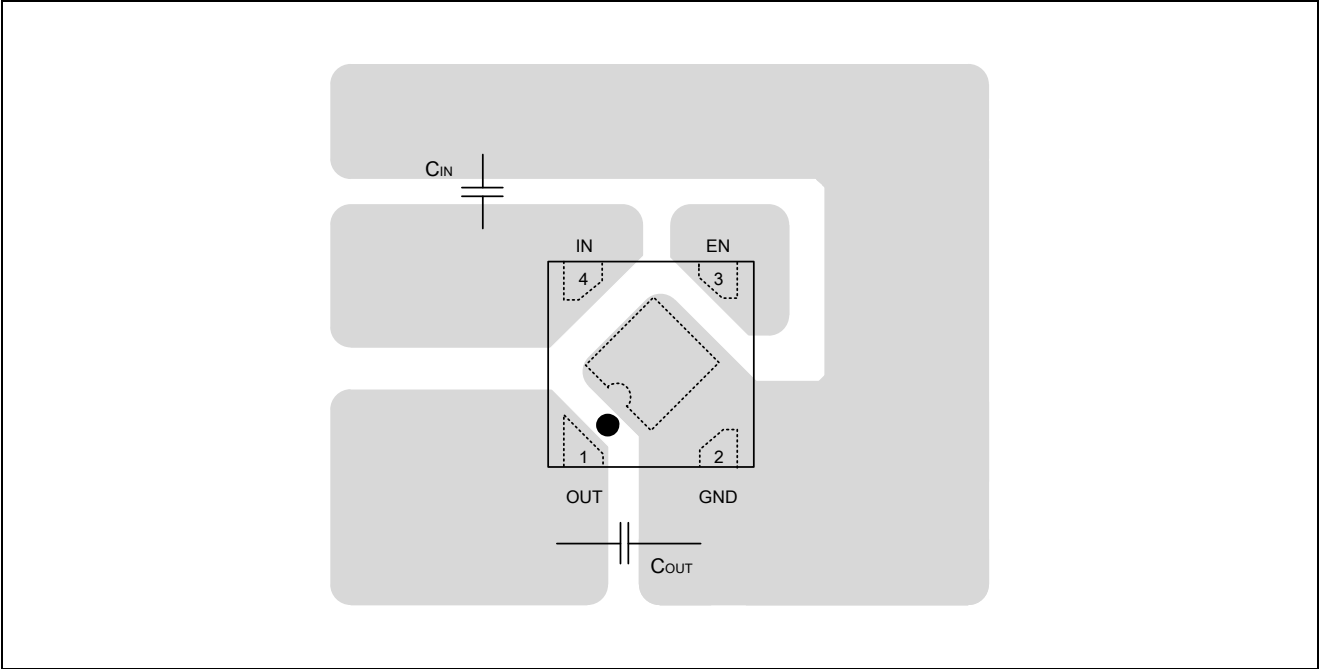




SOT23-5

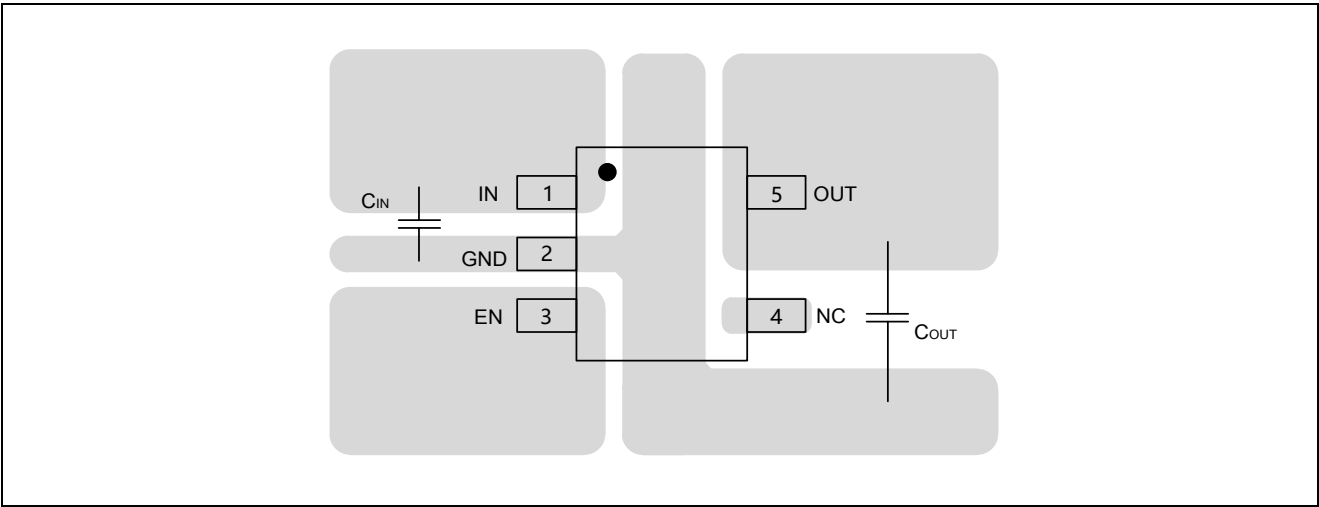

ET536XX


Package Dimension

DFN4

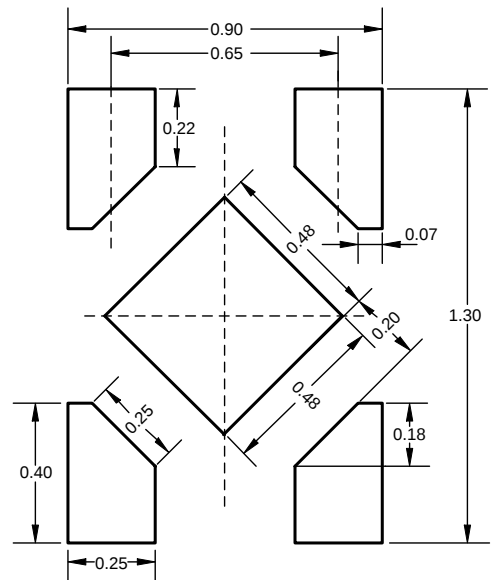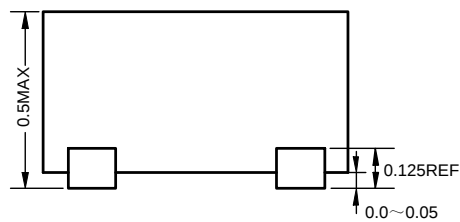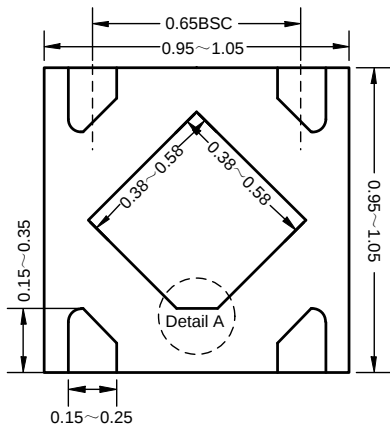

Recommended Land Pattern


Detail A: (PIN1 shape)

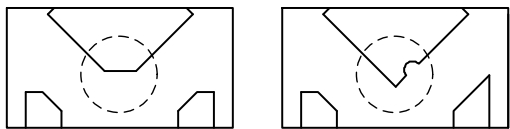

Unit: mm

ET536XX

SOT23-5

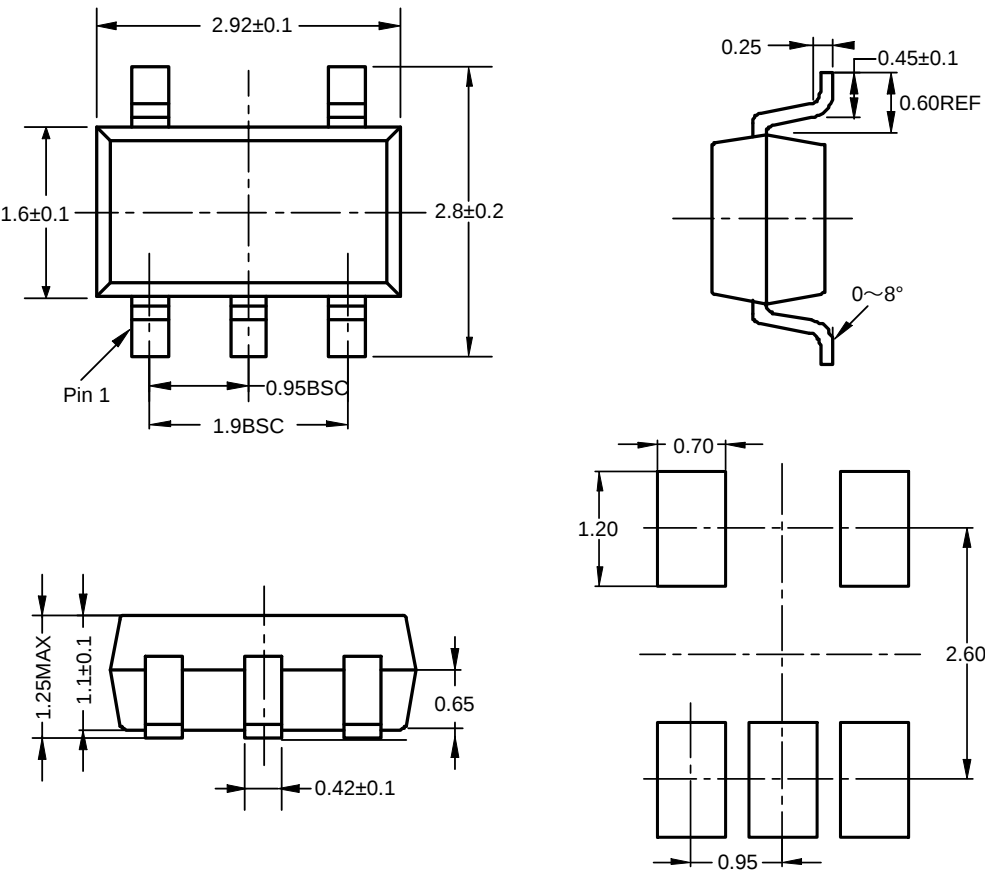


Recommended Land Pattern

Unit: mm


ET536XX

Tape Information

DFN4 (1mm × 1mm)

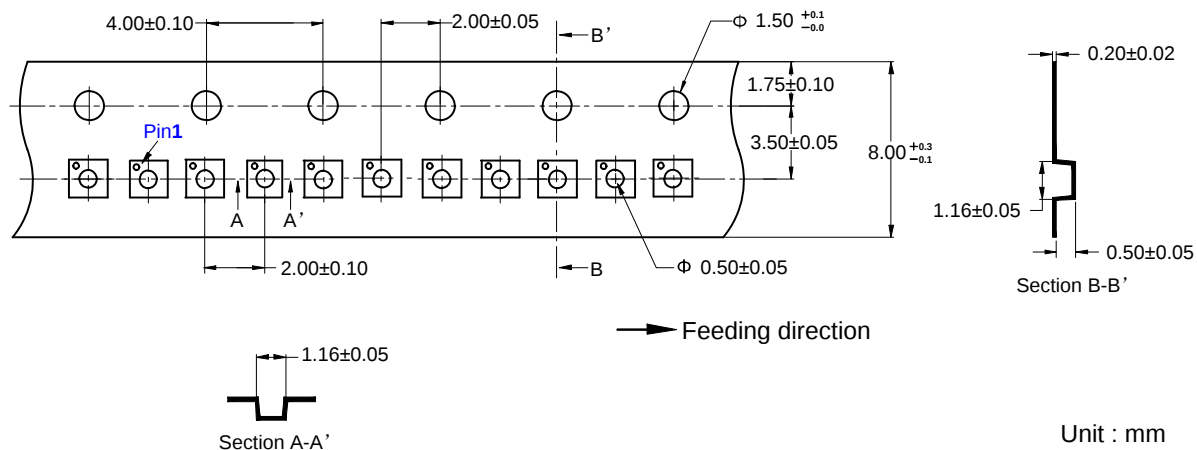

SOT23-5

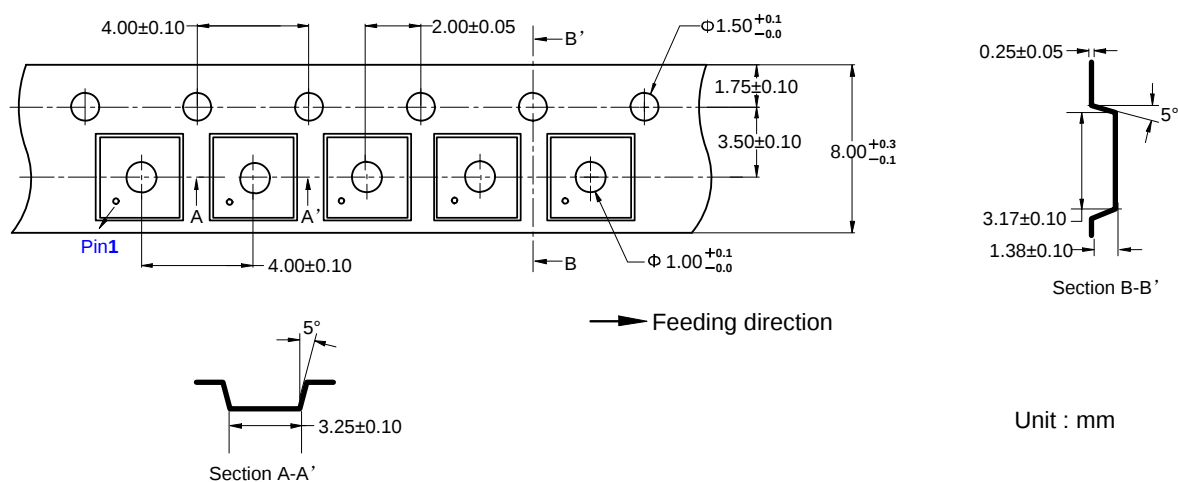

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2020-07-08	Original Version	Liuxm	Liuxm	Zhuji
1.1	2021-10-21	Add ESD and R _{6JA} in AMR table	Liuxm	Liuxm	Zhuji
1.2	2022-09-23	Update Typeset Add Typical Characteristic	Licheng	Liuxm	Licheng
1.3	2025-10-9	Add tape information	Shib	Liuxm	Liujy