

Dual 4-channel CMOS Analog Multiplexer

General Description

The ET74HC4852 is a CMOS analog multiplexer which consists of two 4-channel multiplexers. It operates from 2.5V to 5.5V single power supply and all digital inputs support 1.8V logic control.

The ET74HC4852 features low voltage, low on-resistance and low off-leakage current. The high performances make it very suitable for multiple applications, such as cellular phones, audio and video signal routing, etc.

The ET74HC4852 is available in Green QFN16, TSSOP16 and SOP16 packages. It operates over an ambient temperature range of -40°C to +85°C.

Features

- Single Supply Voltage Range: 2.5V to 5.5V
- On-Resistance: 44Ω(TYP) with 5V Supply
- Internal A, B Rise Time: 45ns (TYP), $V_{CC} = 5V$
- Internal A, B Fall Time: 50ns (TYP), $V_{CC} = 5V$
- 1.8V Logic Compatible
- Low On-Resistance Flatness
- Low Crosstalk: -90dB ($f = 1MHz$)
- High Off-Isolation: -85dB ($R_L = 50\Omega$, $f = 1MHz$)
- Low Distortion: 0.7% ($R_L = 600\Omega$, $f = 20Hz$ to 20kHz)
- -40°C to +85°C Operating Temperature Range
- Package information:


Part No.	Package	Packing Option	MSL
ET74HC4852Y	QFN16 (3mm×3mm)	Tape and Reel , 3K	Level 3
ET74HC4852V	TSSOP16 (5mm×6.4mm)	Tape and Reel , 4K	Level 3
ET74HC4852M	SOP16 (6mm×10mm)	Tape and Reel , 4K	Level 3

Application

- Automotive
- Portable Equipment
- Sample-and-Hold Circuits
- Data-Acquisition Systems
- Battery-Powered Systems
- Audio and Video Signal Routing

ET74HC4852

Pin Configuration

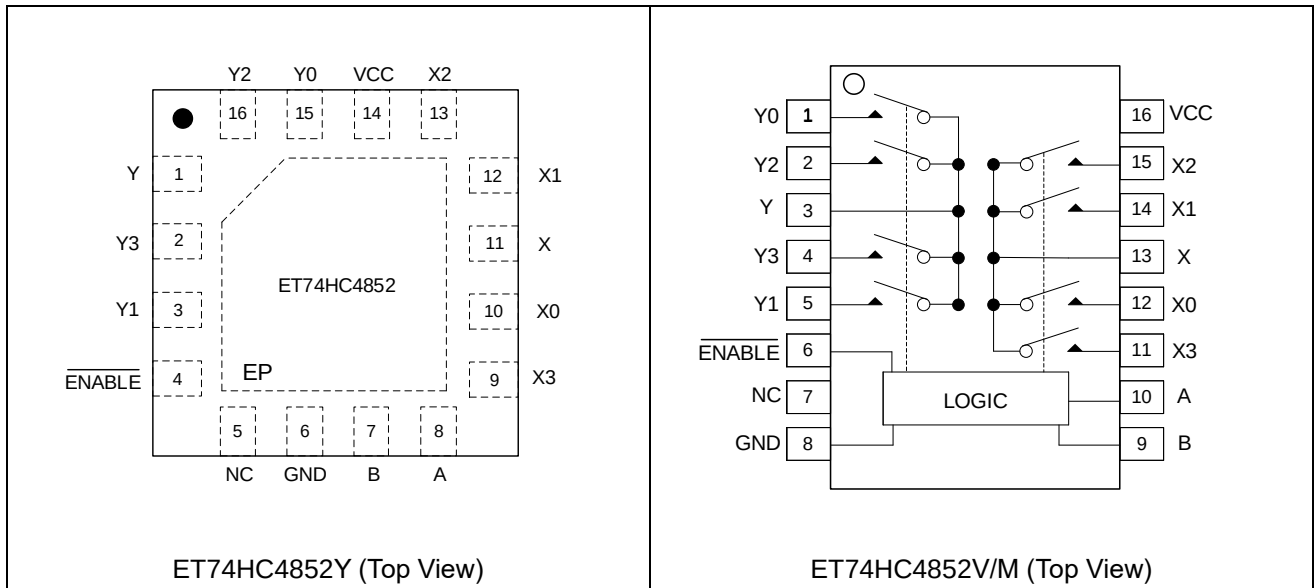

Pin Function

Pin No.		Pin Name	Description
ET74HC4852Y	ET74HC4852V/M		
15, 3, 16, 2	1, 5, 2, 4	Y0, Y1, Y2, Y3	Analog Switch “Y” Inputs 0-3.
1	3	Y	Analog Switch “Y” Output Pin.
4	6	$\overline{\text{ENABLE}}$	Digital Enable Control Pin. Normally connected to GND.
5	7	NC	No Connect.
6	8	GND	Ground. Connect to digital ground.
7	9	B	Digital Address “B” Input Pin.
8	10	A	Digital Address “A” Input Pin.
10, 12, 13, 9	12, 14, 15, 11	X0, X1, X2, X3	Analog Switch “X” Inputs 0-3.
11	13	X	Analog Switch “X” Output Pin.
14	16	VCC	Positive Analog and Digital Supply Voltage Input Pin.
Exposed Pad	-	EP	Exposed Pad. Connect exposed pad to GND.

Note: Any input terminal can be used as an output terminal, and any output terminal can also be used as an input terminal. Signal transmission in both directions is equally well.

ET74HC4852

Truth Table

<u>ENABLE</u>	SELECT INPUTS		ON SWITCHES
	B	A	
H	X	X	All Switches OFF
L	L	L	X-X0, Y-Y0
L	L	H	X-X1, Y-Y1
L	H	L	X-X2, Y-Y2
L	H	H	X-X3, Y-Y3

Note: X Don't care.

Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)

Symbol	Characteristic	Value	Unit
V _{CC}	V _{CC} to GND	-0.3~ 6	V
V _{IO} (X, Y, X0~X3, Y0~Y3) V _A , V _B , V _{ENABLE}	Voltage into Any Terminal ⁽¹⁾	-0.3~ V _{CC} +0.3	V
I _{IO}	Continuous Current into Any Terminal	±20	mA
I _{IO_PEAK}	Peak Current, X_, Y_ (Pulsed at 1ms, 10% duty cycle)	±40	mA
T _{JMAX}	Max Junction Temperature	150	°C
T _L	Lead Temperature (Soldering, 10s)	260	°C
T _{STG}	Storage temperature range	-65~150	°C
V _{ESD}	HBM ESD Susceptibility	±2000	V

Note1: Voltages exceeding V_{CC} or GND on any signal terminal are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Recommended Operating Conditions

Symbol	Characteristic	Min	Max	Unit
V _{CC}	Supply Voltage Range	2.5	5.5	V
T _A	Operating Temperature Range	-40	85	°C

ET74HC4852

Electrical Characteristics

$V_{CC} = 5.0V$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)

Parameter	Symbol	Conditions	Temp	Min	Typ	Max	Unit
ANALOG SWITCH							
Analog Signal Range	$V_{X_}, V_{Y_},$ V_X, V_Y		Full	GND		V_{CC}	V
On-Resistance	R_{ON}	$V_{CC} = 5.0V, I_X, I_Y = 1mA$	$25^{\circ}C$		44	58	Ω
			Full			67	
On-Resistance Match Between Channels	ΔR_{ON}	$V_{CC} = 5.0V, I_X, I_Y = 1mA$	$25^{\circ}C$		1.5	5	Ω
			Full			5.3	
On-Resistance Flatness	$R_{FLAT(ON)}$	$V_{CC} = 5.0V, I_X = 1mA$	$25^{\circ}C$		17	25	Ω
			Full			28	
X_,Y_ Off Leakage Current	$I_{X(OFF)},$ $I_{Y(OFF)}$	$V_{CC} = 5.0V,$ $V_{X_}, V_{Y_} = 1V, 4.5V,$ $V_X, V_Y = 4.5V, 1V$	$25^{\circ}C$		1	1000	nA
X,Y Off Leakage Current	$I_{X(OFF)},$ $I_{Y(OFF)}$	$V_{CC} = 5.0V,$ $V_{X_}, V_{Y_} = 1V, 4.5V,$ $V_X, V_Y = 4.5V, 1V$	$25^{\circ}C$		1	1000	nA
X,Y On Leakage Current	$I_{X(ON)},$ $I_{Y(ON)}$	$V_{CC} = 5.0V,$ $V_X, V_Y = 4.5V, 1V$	$25^{\circ}C$		1	1000	nA
DIGITAL I/O							
Logic Input Logic Threshold High	$V_{AH}, V_{BH},$ V_{ENH}		$25^{\circ}C$	1.7			V
Logic Input Logic Threshold Low	$V_{AL}, V_{BL},$ V_{ENL}		$25^{\circ}C$			0.5	V
Input-Current High	$I_{AH}, I_{BH},$ I_{ENH}	$V_A, V_B, V_{EN} = V_{CC}$	$25^{\circ}C$		1	1000	nA
Input-Current Low	$I_{AL}, I_{BL},$ I_{ENL}	$V_A, V_B, V_{EN} = 0V$	$25^{\circ}C$		1	1000	nA
DYNAMIC CHARACTERISTICS							
Address Transition Time	t_{TRANS}	$V_{X_}, V_{Y_} = 3V/0V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 1	$25^{\circ}C$		85		ns
ENABLE Turn-On Time	t_{ON}	$V_{X_}, V_{Y_} = 3V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 2	$25^{\circ}C$		60		ns
ENABLE Turn-Off Time	t_{OFF}	$V_{X_}, V_{Y_} = 3V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 2	$25^{\circ}C$		20		ns

ET74HC4852

Electrical Characteristics(Continued)

$V_{CC} = 5.0V$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)

Parameter	Symbol	Conditions	Temp	Min	Typ	Max	Unit
Internal A, B Rise Time	t_R		$25^{\circ}C$		45		ns
Internal A, B Fall Time	t_F		$25^{\circ}C$		50		ns
Break-Before-Make Time Delay	t_D	$V_{X-}, V_{Y-} = 3V$, $R_L = 300\Omega$, $C_L = 35pF$, Figure 3	$25^{\circ}C$		50		ns
Charge Injection	Q	$R_S = 0\Omega$, $C_L = 1nF$, Figure 4	$25^{\circ}C$		3		pC
Off Isolation	V_{ISO}	$R_L = 50\Omega$, $f = 1MHz$, Figure 5	$25^{\circ}C$		-85		dB
Crosstalk	X_{TALK}	$f = 1MHz$, Figure 5	$25^{\circ}C$		-90		dB
Input Off-Capacitance	$C_{X(OFF)}$, $C_{Y(OFF)}$	$f = 1MHz$, Figure 6	$25^{\circ}C$		5		pF
Output Off-Capacitance	$C_{X(OFF)}$, $C_{Y(OFF)}$	$f = 1MHz$, Figure 6	$25^{\circ}C$		9		pF
Output On-Capacitance	$C_{X(ON)}$, $C_{Y(ON)}$	$f = 1MHz$, Figure 6	$25^{\circ}C$		13		pF
-3dB Bandwidth	BW	$R_L = 50\Omega$	$25^{\circ}C$		180		MHz
Total Harmonic Distortion	THD	$R_L = 600\Omega$, $5V_{P-P}$, $f = 20Hz$ to $20kHz$	$25^{\circ}C$		0.7		%
POWER SUPPLY							
Power Supply Range	V_{CC}		Full	2.5		5.5	V
Power Supply Current	I_{CC}	$V_{CC} = 5.5V$, $V_A, V_B, V_{EN} = V_{CC}$ or 0	$25^{\circ}C$		0.001	6	μA

ET74HC4852

Electrical Characteristics

$V_{CC} = 3.3V$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)

Parameter	Symbol	Conditions	Temp	Min	Typ	Max	Unit
ANALOG SWITCH							
Analog Signal Range	$V_{X_}, V_{Y_},$ V_X, V_Y		Full	GND		V_{CC}	V
On-Resistance	R_{ON}	$I_X, I_Y = 1mA$	$25^{\circ}C$		80	110	Ω
			Full			126	
X_,Y_ Off Leakage Current	$I_{X(OFF)},$ $I_{Y(OFF)}$	$V_{X_}, V_{Y_} = 1V, 3V,$ $V_X, V_Y = 3V, 1V$	$25^{\circ}C$		1	1000	nA
X,Y Off Leakage Current	$I_{X(OFF)},$ $I_{Y(OFF)}$	$V_{X_}, V_{Y_} = 1V, 3V,$ $V_X, V_Y = 3V, 1V$	$25^{\circ}C$		1	1000	nA
X,Y On Leakage Current	$I_{X(ON)},$ $I_{Y(ON)}$	$V_X, V_Y = 3V, 1V$	$25^{\circ}C$		1	1000	nA
DIGITAL I/O							
Logic Input Logic Threshold High	$V_{AH}, V_{BH},$ V_{ENH}		$25^{\circ}C$	1.7			V
Logic Input Logic Threshold Low	$V_{AL}, V_{BL},$ V_{ENL}		$25^{\circ}C$			0.5	V
Input-Current High	$I_{AH}, I_{BH},$ I_{ENH}	$V_A, V_B, V_{EN} = V_{CC}$	$25^{\circ}C$		1	1000	nA
Input-Current Low	$I_{AL}, I_{BL},$ I_{ENL}	$V_A, V_B, V_{EN} = 0V$	$25^{\circ}C$		1	1000	nA
DYNAMIC CHARACTERISTICS							
Address Transition Time	t_{TRANS}	$V_{X_}, V_{Y_} = 3V/0V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 1	$25^{\circ}C$		150		ns
ENABLE Turn-On Time	t_{ON}	$V_{X_}, V_{Y_} = 3V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 2	$25^{\circ}C$		110		ns
ENABLE Turn-Off Time	t_{OFF}	$V_{X_}, V_{Y_} = 3V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 2	$25^{\circ}C$		50		ns
Internal A, B Rise Time	t_R		$25^{\circ}C$		80		ns
Internal A, B Fall Time	t_F		$25^{\circ}C$		85		ns
Break-Before-Make Time Delay	t_D	$V_{X_}, V_{Y_} = 3V,$ $R_L = 300\Omega, C_L = 35pF,$ Figure 3	$25^{\circ}C$		80		ns
-3dB Bandwidth	BW	$R_L = 50\Omega$	$25^{\circ}C$		180		MHz

ET74HC4852

Electrical Characteristics(Continued)

$V_{CC} = 3.3V$, Full = $-40^{\circ}C$ to $+85^{\circ}C$, typical values are at $T_A = +25^{\circ}C$, unless otherwise noted.)

Parameter	Symbol	Conditions	Temp	Min	Typ	Max	Unit
Charge Injection	Q	$R_S = 0\Omega$, $C_L = 1nF$, $V_S = 2.5V$, Figure 4	$25^{\circ}C$		3		pC
POWER SUPPLY							
Power Supply Current	I_{CC}	$V_{CC} = 3.6V$, $V_A, V_B, V_{EN} = V_{CC}$ or 0	$25^{\circ}C$		0.001	3	μA

ET74HC4852

Test Circuit and Waveform

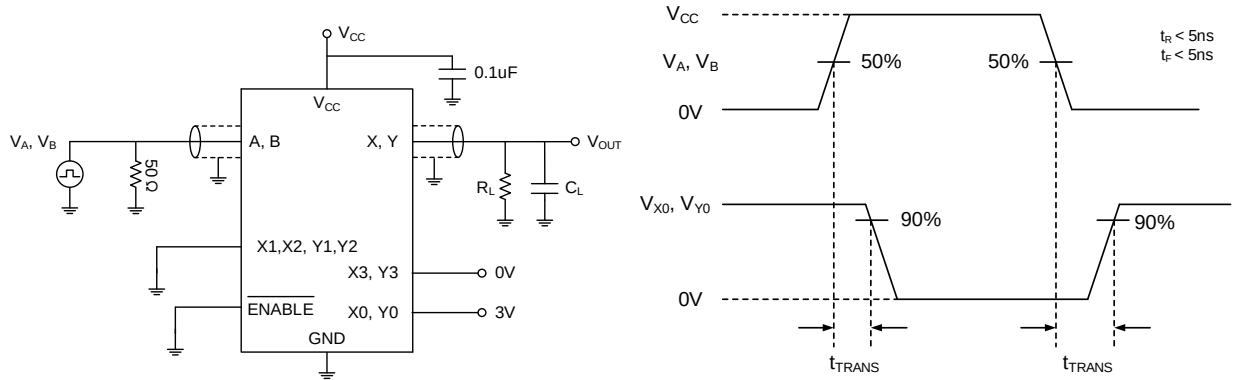


Figure 1. Address Transition Times (t_{TRANS})

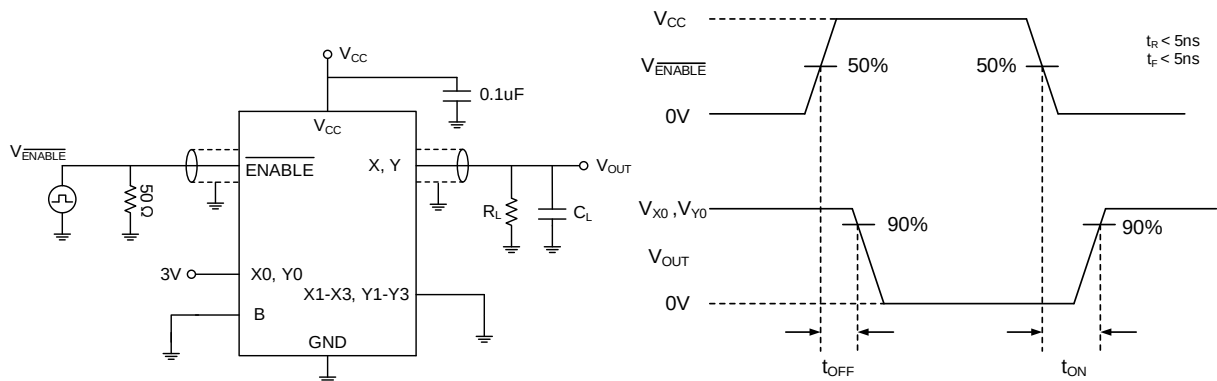


Figure 2. Switching Times (t_{ON}, t_{OFF})

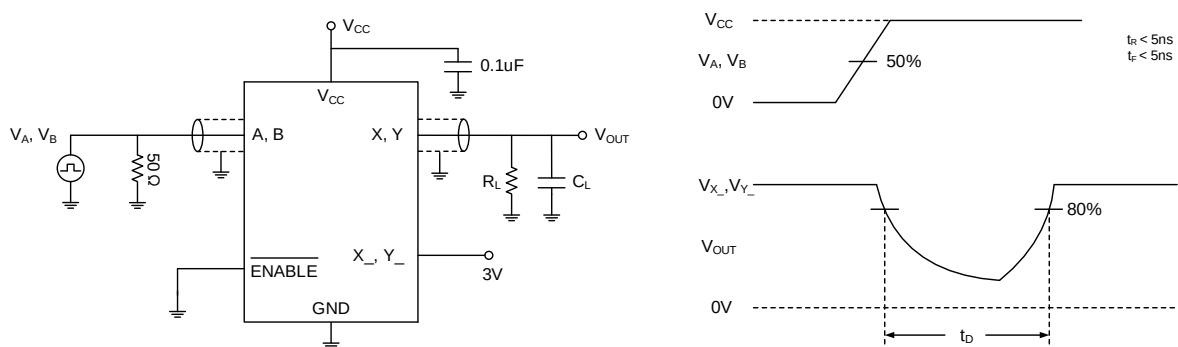


Figure 3. Break-Before-Make Time Delay (t_D)

ET74HC4852

Test Circuit and Waveform(Continued)


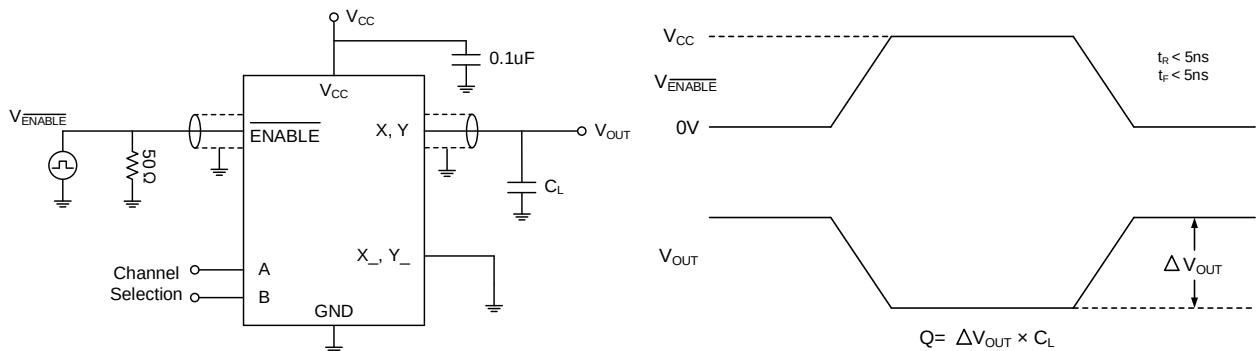


Figure 4. Charge Injection (Q)

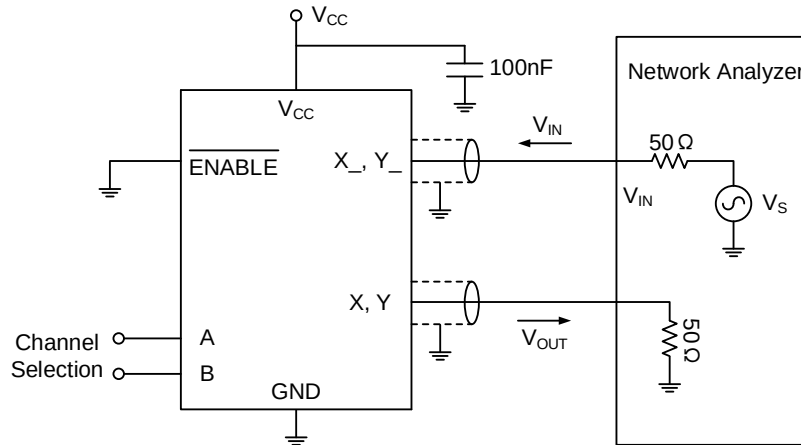

Off Isolation = $20\log(V_{OUT}/V_{IN})$ (Measured between X and "OFF" X_- Terminal on Each Switch)

On Loss = $20\log(V_{OUT}/V_{IN})$ (Measured between X and "ON" X_- Terminal on Each Switch)

Figure 5. Off Isolation, On Loss

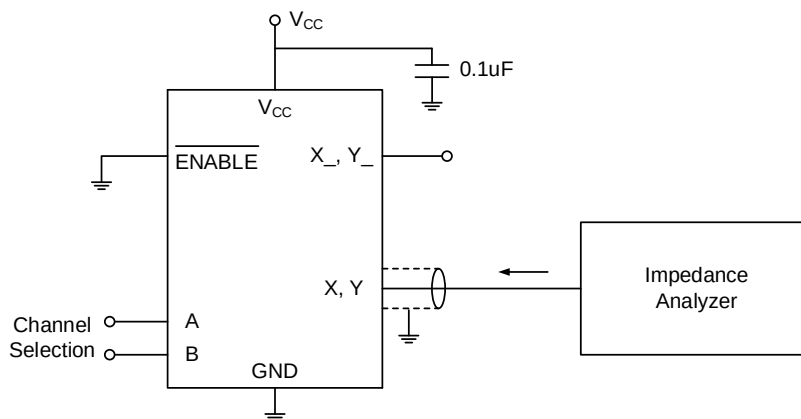


Figure 6. Capacitance

Typical Characteristics

V_{CC} = 5.0V, unless otherwise noted.

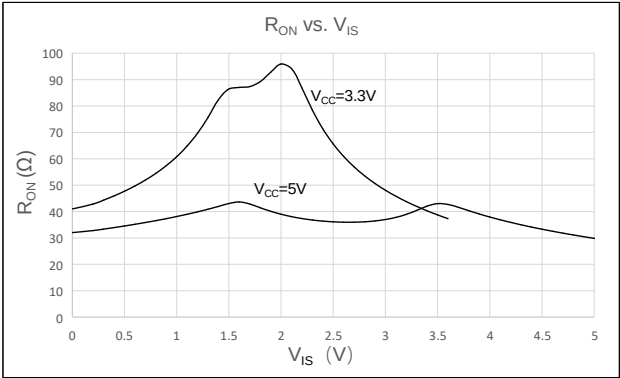


Figure 7. On-Resistance vs. V_{IS}

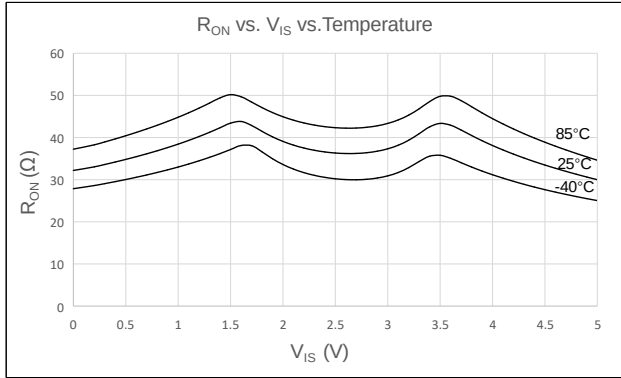


Figure 8. On-Resistance vs. V_{IS} vs. Temp

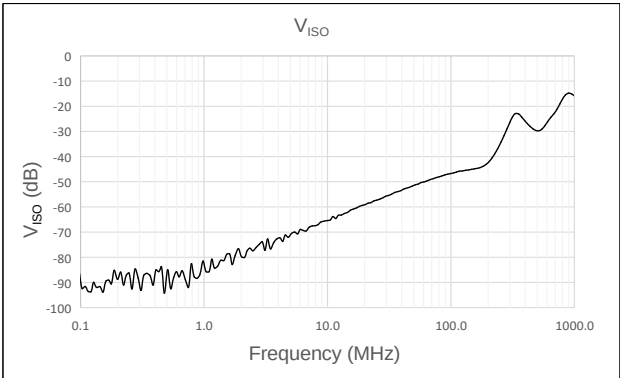


Figure 9. V_{ISO} vs. Frequency


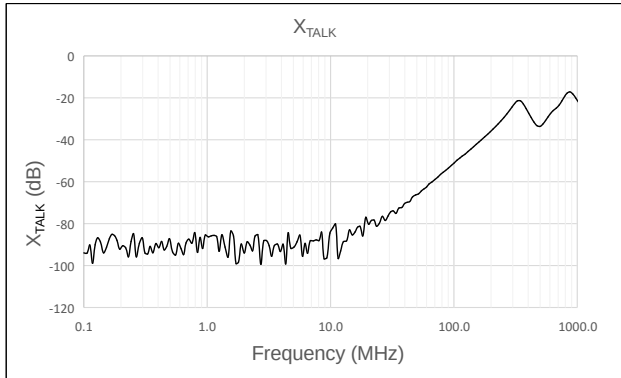


Figure 10. X_{TALK} vs. Frequency


ET74HC4852

Package Dimension


QFN16 (3mm×3mm)

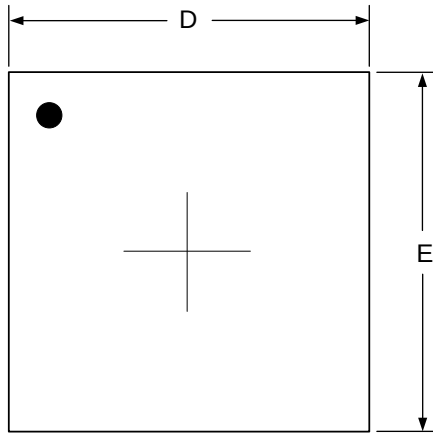

TOP VIEW

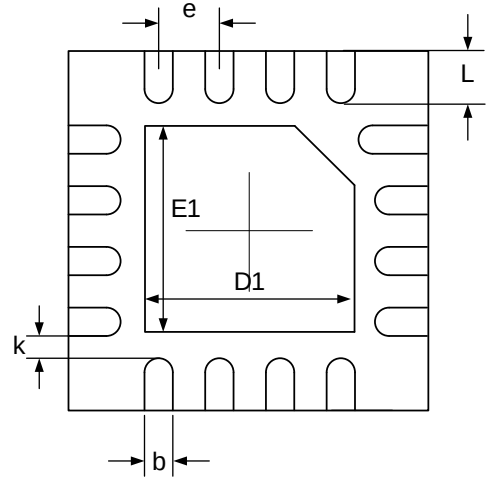

BOTTOM VIEW

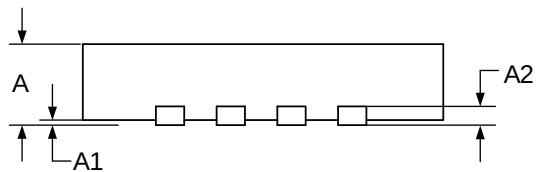


SIDE VIEW

Dimensions Table (Units:mm)

Symbol	Min	Nom	Max
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2	0.203 REF		
b	0.19	0.24	0.29
D	2.90	3.00	3.10
E	2.90	3.00	3.10
e	0.50 TYP		
L	0.30	0.40	0.50
k	0.20 MIN		
D1	1.60	1.70	1.80
E1	1.60	1.70	1.80

ET74HC4852

TSSOP16 (5mm×6.4mm)

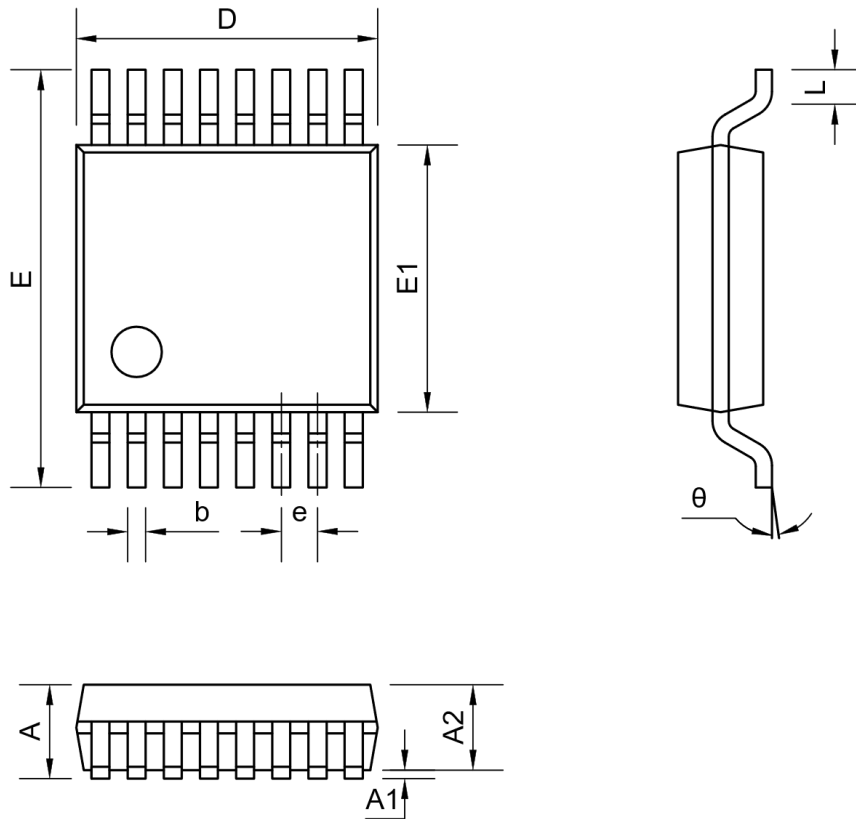


Dimensions Table (Units:mm)

Symbol	Min	Nom	Max
A	--	--	1.20
A1	0.05	--	0.15
A2	0.80	--	1.05
b	0.19	--	0.30
D	4.86	4.98	5.1
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65BSC		
L	0.50	0.60	0.70
θ	1°	--	7°

ET74HC4852

SOP16 (6mm×10mm)

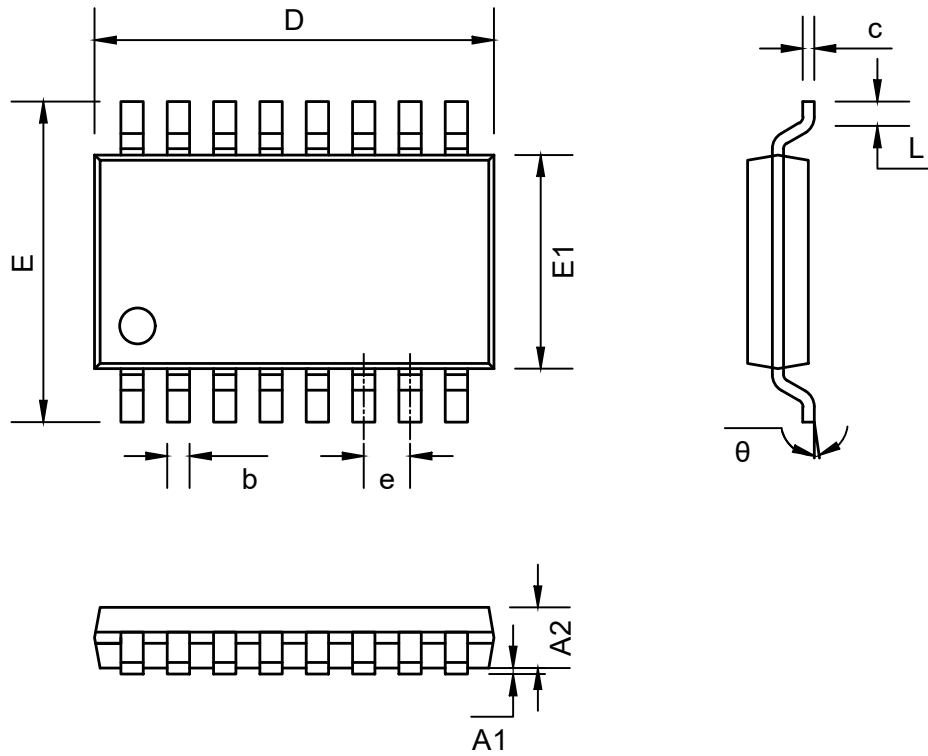

Dimensions Table (Units:mm)

Symbol	Min	Non	Max
A1	0.10	--	0.25
A2	1.35	1.45	1.55
b	0.33	0.42	0.51
c	0.17	--	0.25
D	9.80	10.00	10.20
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27BSC		
L	0.40	--	1.27
θ	0°	--	8°

ET74HC4852

Marking Information

ET74HC4852Y




C482 - Part Number

XXXXX - Tracking Number

Note: X (Tracking Number) is variable, according to the wafer lot number.

ET74HC4852V




C482V - Part Number

XXXXX - Tracking Number

Note: X (Tracking Number) is variable, according to the wafer lot number.

ET74HC4852M



C482M - Part Number

XXXXX - Tracking Number

Note: X (Tracking Number) is variable, according to the wafer lot number.

ET74HC4852

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2023-02-10	Preliminary Version	Qinpl	Gonglf	Qinpl
1.1	2023-02-17	Official edition	Qinpl	Gonglf	Qinpl
1.2	2025-02-19	Update Typical Characteristics	Pansy	Gonglf	Liujoy
1.3	2025-08-11	Add Tape and Marking Information	Qinpl	Gonglf	Liujoy