

ET631XX - Ultra-Low IQ 150mA LDO

General Description

The ET631XX series of CMOS low dropout regulators are designed specifically for portable battery-powered applications which require ultra-low quiescent current. The ultra-low consumption of type 0.6uA ensures long battery life and dynamic transient boost feature improves device transient response for wireless communication applications.

The device is available in small DFN4 (1×1) or SOT23-5 packages.

Features

- Operating Input Voltage Range From 2.2V to 5.5V
- Fixed Output Voltage Range: 1.1V~4.0V (1.1V/1.2V/1.5V/1.8V//2.5V/2.8V/3.0V/3.3V/4.0V and etc)
- Ultra-Low Quiescent Current Typical 0.6uA
- Low Dropout is Typical 240mV at 150mA@V_{OUT}=1.8V
- High Output Voltage Accuracy ±1%
- Stable with Ceramic Capacitors 1uF
- Over-Current Protection
- Thermal Shutdown Protection
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant
- Offered DFN4 (1×1) or SOT23-5 Packages

Applications

- Battery Powered Equipments
- Portable Communication Equipments
- Cameras, Image Sensors and Camcorders
- Label Information

ET631XX


Device Information

ET 631 XX X B

<u>XX</u> Output Voltage		<u>X</u> Package		<u>B</u> Auto-Discharging Function	
Fixed	1.1~4.0V (0.05V Steps)	Blank	SOT23-5	B	With Auto-discharge
		Y	DFN4(1×1)		

Part No.	Package	Packing Option	MSL
ET631XXYB	DFN4 (1×1)	Tape and Reel, 10K/Reel	1
ET631XXB	SOT23-5	Tape and Reel, 3K/Reel	3

Pin Configuration

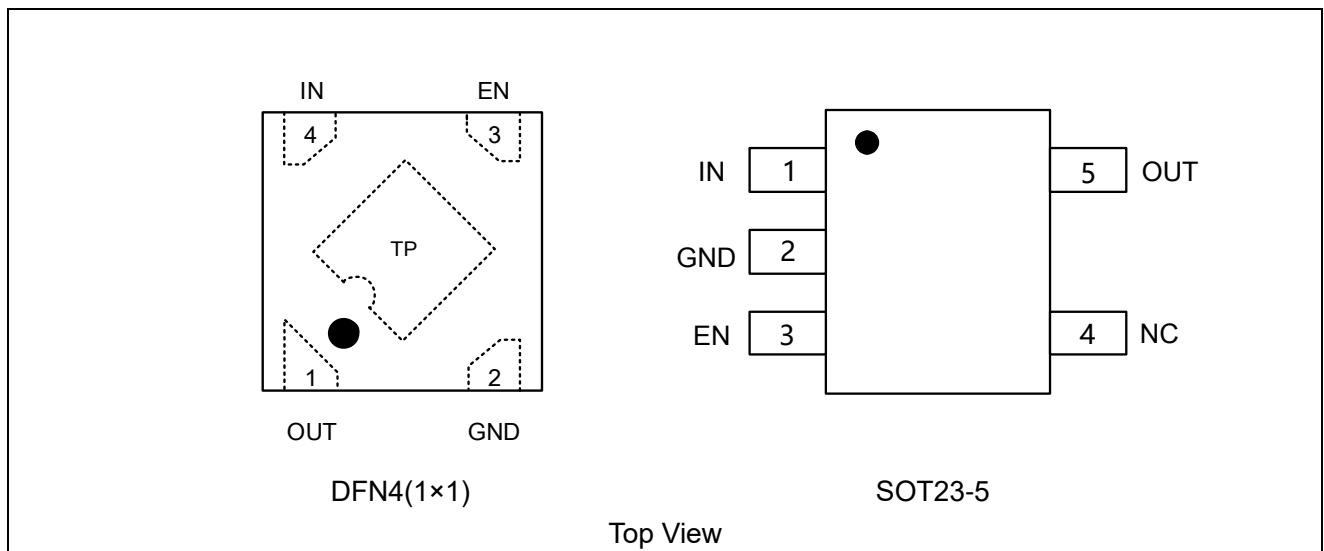


Pin Function

Pin No.		Symbol	Pin Description
DFN4	SOT23-5		
1	5	OUT	Output Pin
2	2	GND	Power Supply Ground
3	3	EN	Chip Enable Pin (Active “H”)
4	1	IN	Power Supply Input Voltage
TP		Thermal Pad	Thermal pad for DFN4(1×1) package, connect to GND or leave floating. Do not connect to any potential other than GND.
	4	NC	No connection.

ET631XX

Block Diagram

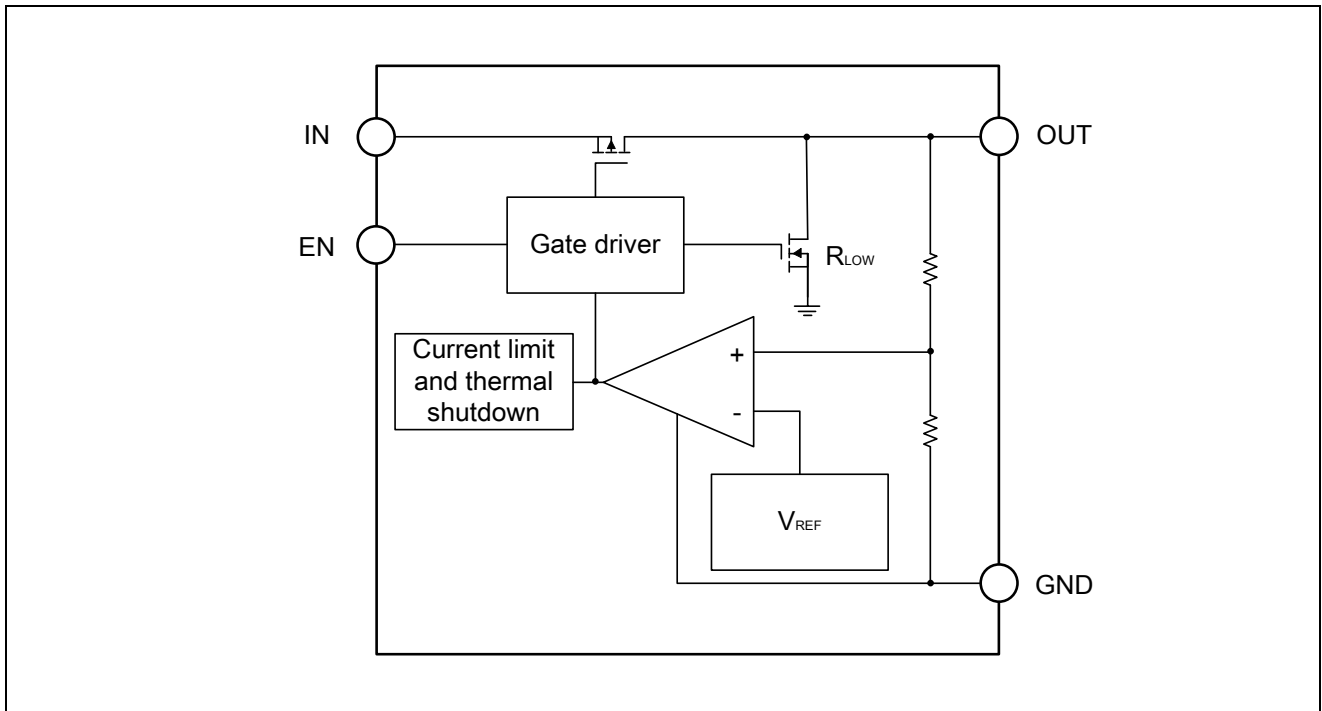

Functional Description

General

The ET631XX is a high performance 150mA Linear Regulator with Ultra Low I_Q . This device delivers low Noise and high Power Supply Rejection Ratio with excellent dynamic performance due to employing the Dynamic Quiescent Current adjustment which assure ultra low I_Q consumption at no-load state. These parameters make this device very suitable for various battery powered applications.

Input Capacitor

It is recommended to connect at least a 1 μ F Ceramic X5R or X7R capacitor between IN and GND pins of the device. This capacitor will provide a low impedance path for any unwanted AC signals or Noise superimposed onto constant Input Voltage. The good input capacitor will limit the influence of input trace inductances and source resistance during sudden load current changes.

Higher capacitance and lower ESR Capacitors will improve the overall line transient response.

Output Capacitor

The ET631XX does not require a minimum Equivalent Series Resistance (ESR) for the output capacitor. The X5R and X7R types have the lowest capacitance variations over temperature thus they are recommended.

There is recommended connect the output capacitor as close as possible to the output pin of the regulator.

ET631XX

ON/OFF Input Operation

The ET631XX uses the EN pin to enable /disable its device and to activate /deactivate the active discharge function at devices with this feature. If the EN pin voltage is pulled below 0.4V the device is guaranteed to be disable. The active discharge transistor at the devices with Active Discharge Feature is activated and the output voltage VOUT is pulled to GND through an internal circuitry with effective resistance about 45Ω.

If the EN pin voltage is higher than 1.2V the device is guaranteed to be enabled. The internal active discharge circuitry is switched off and the desired output voltage is available at output pin. In case the Enable function is not required the EN pin should be connected directly to input pin.

Current Limit Protection

When output current at the OUT pin is higher than current limit threshold, the current limit protection will be triggered and clamp the output current to approximately 300mA to prevent over-current and to protect the regulator from damage due to overheating.

Thermal shutdown Protection

When the die temperature exceeds the Thermal Shutdown point (TSD = 155°C typical) the device goes to disabled state and the output voltage is not delivered until the die temperature decreases to 150°C. The Thermal Shutdown feature provides a protection from a catastrophic device failure at accidental overheating. This protection is not intended to be used as a substitute for proper heat sinking.

Power Dissipation and Heat sinking

The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material and the ambient temperature affect the rate of junction temperature rise for the part. The maximum power dissipation the ET631XX device can handle is given by:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

ET631XX

Absolute Maximum Ratings

Symbol	Parameters (Items)	Value	Unit
V _{IN}	IN Voltage ⁽¹⁾	-0.3 to 6.0	V
V _{EN}	Input Voltage (EN Pin)	-0.3 to 6.0	V
V _{OUT}	Output Voltage	-0.3 to V _{IN} +0.3	V
T _J	Operating Junction Temperature	-40 to 150	°C
T _{STG}	Storage Temperature	-65 to 150	°C
V _{ESD}	Human Body Model (JESD22-A114)	±4000	V
	Charged Device Model (JESD22-C101)	±1500	
I _{LU}	Latch up Current Maximum Rating (JESD78E)	±200	mA

Note1: Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for safe operating area.

Thermal Characteristics

Symbol	Package	Parameters	Value	Unit
R _{θJA}	DFN4	Thermal Resistance, Junction-to-Air	312	°C/W
	SOT23-5		312	
P _{DMAX}	DFN4	Power Dissipation	400	mW
	SOT23-5		400	

Recommended Operating Conditions

Symbol	Parameters	Rating	Unit
V _{IN}	Input Voltage	2.2 to 5.5	V
I _{OUT}	Output Current	0 to 150	mA
T _A	Operating Ambient Temperature	-40 to 85	°C
C _{IN}	Effective Input Ceramic Capacitor Value	0.47 to 4.7	μF
C _{OUT}	Effective Output Ceramic Capacitor Value	0.47 to 4.7	μF
ESR	Input and Output Capacitor Equivalent Series Resistance (ESR)	5 to 100	mΩ

ET631XX

Electrical Characteristics

VOLTAGE VERSION 1.1V

($V_{IN}=2.5V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	1.085	1.1	1.115	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	1.070	1.1	1.130	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=2.5V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=2.5V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ⁽³⁾ ⁽⁵⁾			1100	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=2.5V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		55		dB
e_N	Output Noise	$V_{IN}=2.5V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		55		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		25		$^{\circ}C$

ET631XX

VOLTAGE VERSION 1.2V

($V_{IN}=2.5V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	1.185	1.2	1.215	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	1.170	1.2	1.230	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=2.5V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=2.5V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ^{(3) (5)}			1000	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=2.5V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		55		dB
e_N	Output Noise	$V_{IN}=2.5V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		55		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		25		$^{\circ}C$

ET631XX

VOLTAGE VERSION 1.5V

($V_{IN}=2.5V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	1.485	1.5	1.515	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	1.470	1.5	1.530	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=2.5V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=2.5V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ^{(3) (5)}			700	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=2.5V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		55		dB
e_N	Output Noise	$V_{IN}=2.5V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		60		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		25		$^{\circ}C$

ET631XX

VOLTAGE VERSION 1.8V

($V_{IN}=2.8V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	1.782	1.8	1.818	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	1.764	1.8	1.836	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=2.8V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=2.8V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ⁽³⁾		240	340	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=2.8V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		55		dB
e_N	Output Noise	$V_{IN}=2.8V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		70		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		20		$^{\circ}C$

ET631XX

VOLTAGE VERSION 2.5V

($V_{IN}=3.5V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	2.475	2.5	2.525	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	2.450	2.5	2.550	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=3.5V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=3.5V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ⁽³⁾		180	280	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=3.5V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		45		dB
e_N	Output Noise	$V_{IN}=3.5V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		85		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		20		$^{\circ}C$

ET631XX

VOLTAGE VERSION 2.8V

($V_{IN}=3.8V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	2.772	2.8	2.828	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	2.744	2.8	2.856	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=3.8V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=3.8V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ⁽³⁾		170	270	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=3.8V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		45		dB
e_N	Output Noise	$V_{IN}=3.8V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		90		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		20		$^{\circ}C$

ET631XX

VOLTAGE VERSION 3.0V

($V_{IN}=4.0V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	2.970	3.0	3.030	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	2.940	3.0	3.060	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=4.0V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=4.0V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ⁽³⁾		170	270	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=4.0V+200mV_{Vpp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		45		dB
e_N	Output Noise	$V_{IN}=4.0V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		93		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		20		$^{\circ}C$

ET631XX

VOLTAGE VERSION 3.3V

($V_{IN}=4.3V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.) ⁽²⁾

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V_{IN}	Input Voltage Range		2.2		5.5	V
V_{OUT}	Regulated Output Voltage	$T_A=25^{\circ}C$	3.267	3.3	3.333	V
		$-40^{\circ}C \leq T_A \leq 85^{\circ}C$	3.234	3.3	3.366	
ΔV_{OUT}	Output Voltage Line Regulation	$V_{IN}=4.3V$ to $5.5V$, $I_{OUT}=1mA$		0.05	0.20	%/V
	Output Voltage Load Regulation	I_{OUT} from $1mA$ to $150mA$, $V_{IN}=4.3V$		5	20	mV
V_{DROP}	Dropout Voltage	$I_{OUT}=150mA$ ⁽³⁾		160	260	mV
I_{LIMIT}	Current Limit	$T_A=25^{\circ}C$	200	400	600	mA
I_{SHORT}	Short Current Limit	$V_{OUT}=0V$	70	170	270	mA
I_{Q_ON}	Input Quiescent Current	Active mode: $V_{EN}=V_{IN}$ $I_{OUT}=0mA$		0.6	0.9	μA
I_{Q_OFF}	Input Shutdown Current	$V_{EN}=0V$, $T_A=25^{\circ}C$		0.1	0.5	μA
V_{IH}	EN High Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} rising until the output is enabled	1.2			V
V_{IL}	EN Low Threshold	$V_{IN}=2.2V$ to $5.5V$, V_{EN} falling until the output is disabled			0.4	V
I_{EN}	EN Pin Input Current	$V_{EN} \leq V_{IN} \leq 5.5V$		20	200	nA
PSRR	Power Supply Rejection Ratio	$f=1kHz$, $V_{IN}=4.3V+200mVV_{pp}$ Modulation, $I_{OUT}=150mA$ ⁽⁴⁾		45		dB
e_N	Output Noise	$V_{IN}=4.3V$, $f=10Hz$ to $100kHz$, $I_{OUT}=1mA$, $C_{OUT}=1\mu F$ ⁽⁴⁾		95		μV_{RMS}
R_{LOW}	Output resistance of auto discharge at off state	$EN=0V$, $V_{IN}=4V$, $I_{OUT}=10mA$	15	45	90	Ω
T_{TSD}	Over-temperature Shutdown Threshold	T_J rising ⁽⁴⁾		155		$^{\circ}C$
T_{HYS}	Over-temperature Shutdown Hysteresis	T_J falling from shutdown ⁽⁴⁾		20		$^{\circ}C$

Note2: Here V_{IN} means internal circuit can work normal. If $V_{IN} < V_{OUT}$, Output voltage follow V_{IN} ($I_{OUT}=1mA$), circuit is safety.

Note3: V_{DROP} FT test method: Test the V_{OUT} voltage at $V_{SET}+V_{DROP_{MAX}}$ with $150mA$ output current.

Note4: Guaranteed by design and characterization. Not a FT item.


Note5: The minimum operating voltage is $2.2V$. $V_{DROP}=V_{IN(MIN)}-V_{OUT}$.

ET631XX


Typical Characteristics

(1) VOLTAGE VERSION 1.1V


($V_{IN}=2.5V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

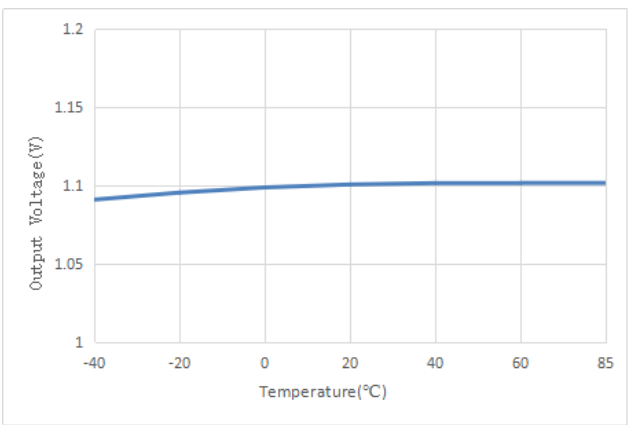


Output Voltage VS Temperature

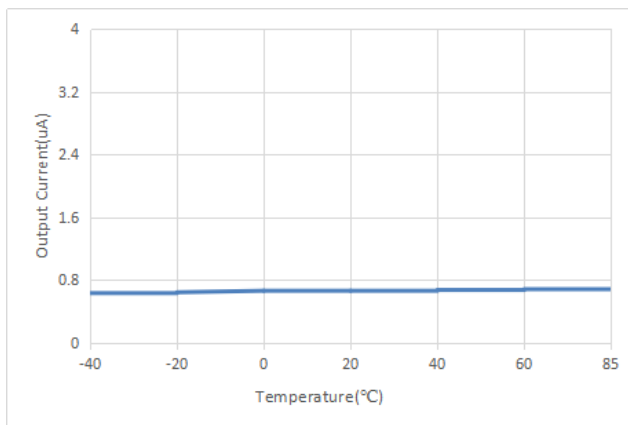


Supply Current VS Temperature

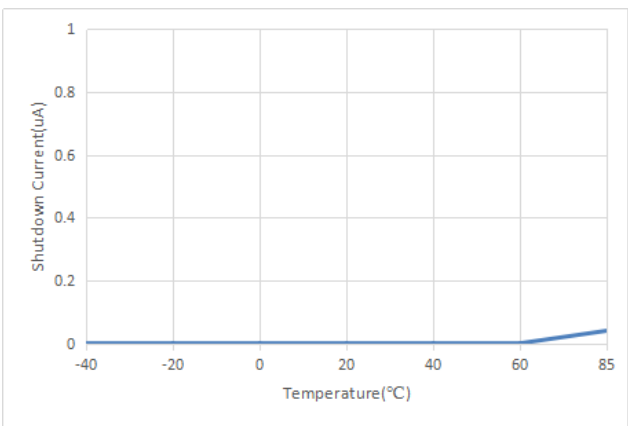


Shutdown Current VS Temperature

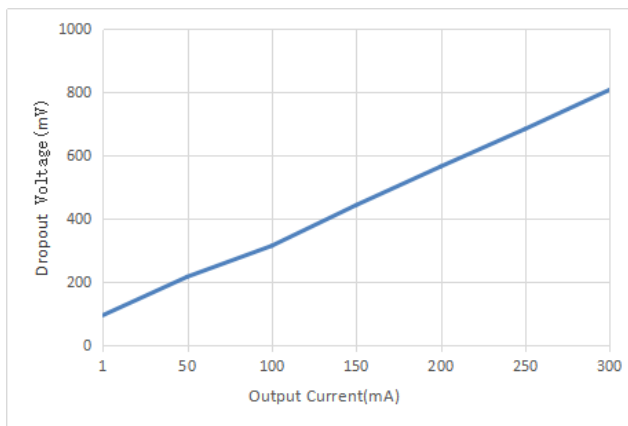

Dropout Voltage VS Output Current

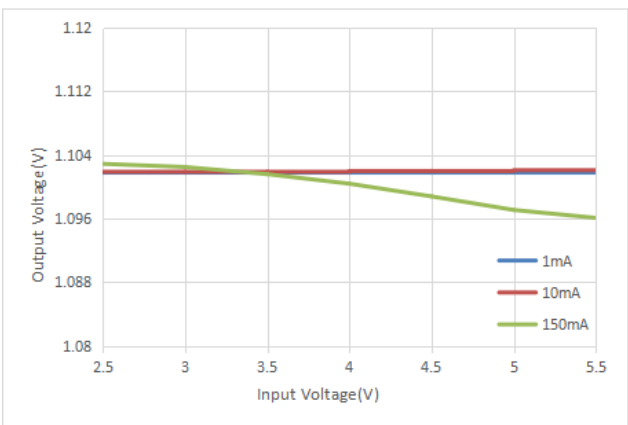


Output Voltage VS Input Voltage

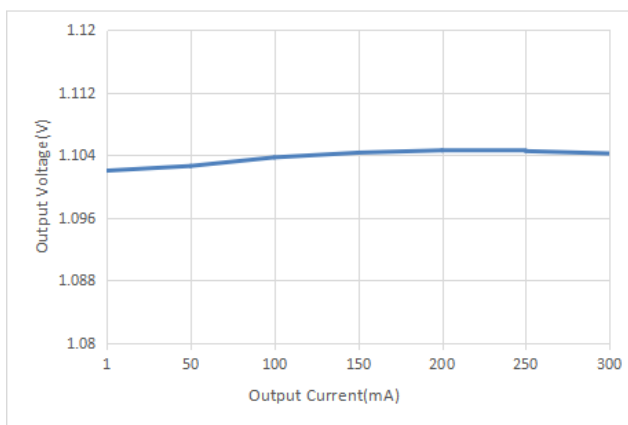


Output Voltage VS Output Current


ET631XX

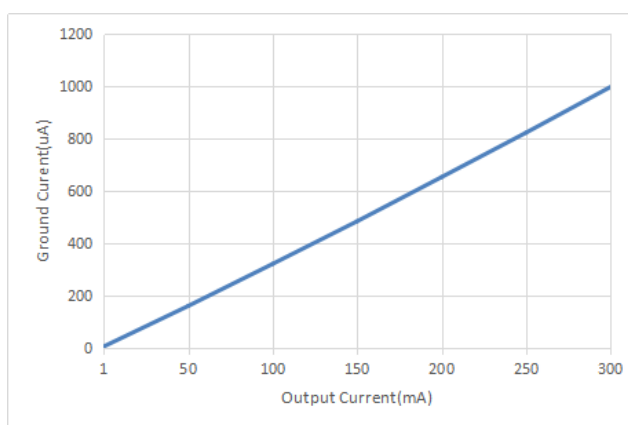


Ground Current VS Output Current

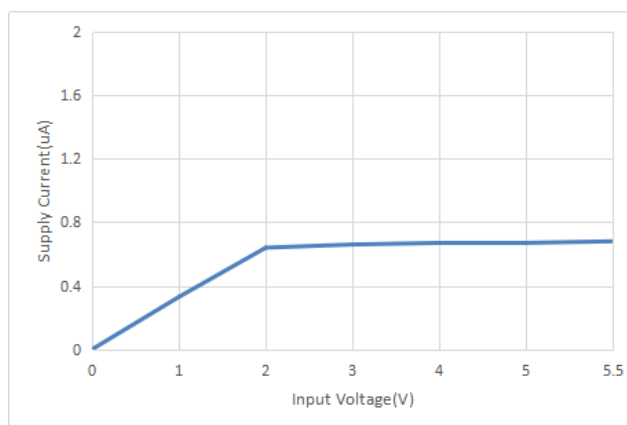


Supply Current VS Input Voltage

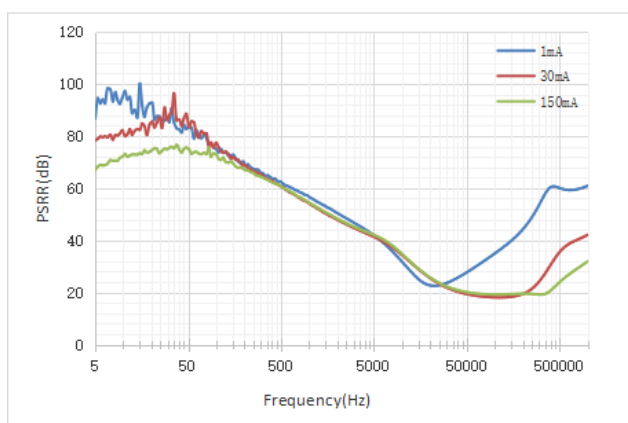


PSRR VS Output Current

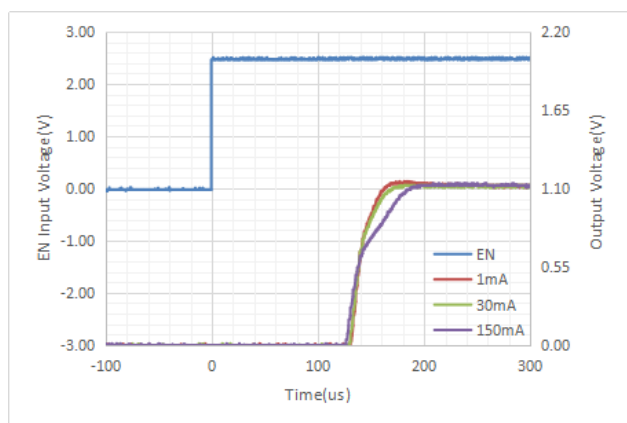

Turn On Speed VS EN Voltage

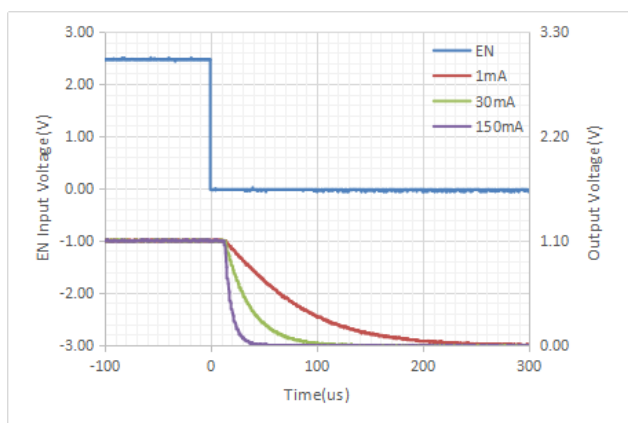


Turn Off Speed VS EN Voltage

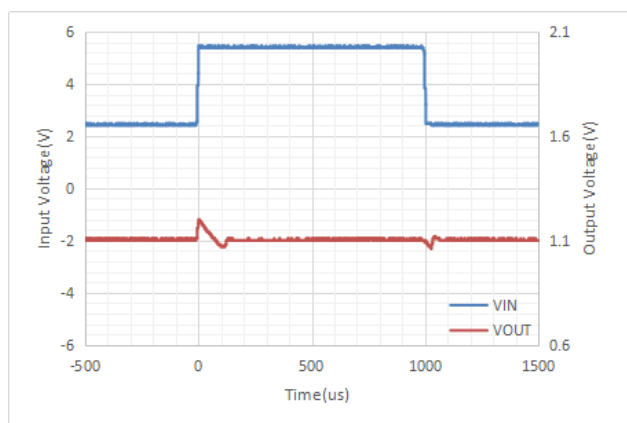

Line Transient Response


ET631XX

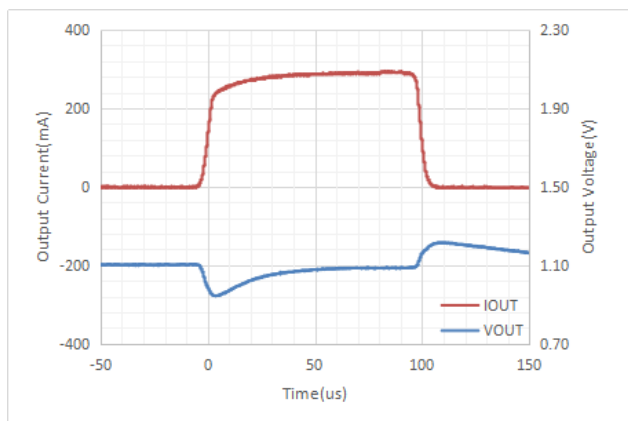


Load Transient Response

(2) VOLTAGE VERSION 1.8V


($V_{IN}=2.8V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

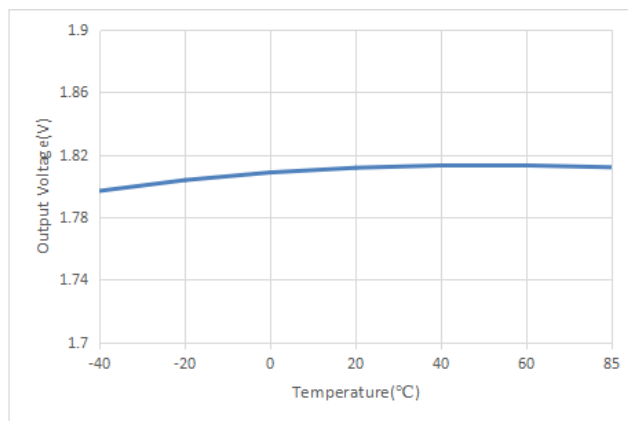


Output Voltage VS Temperature

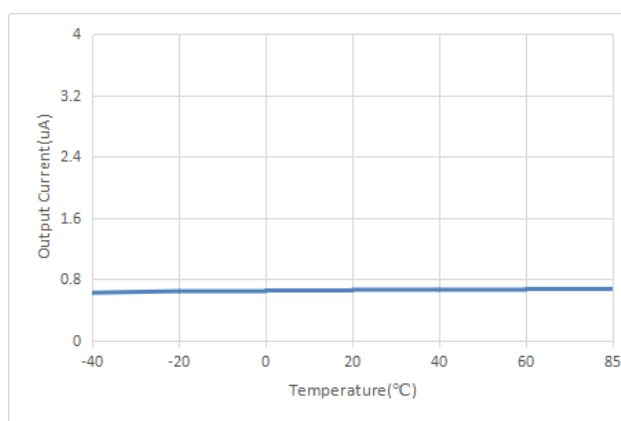

Supply Current VS Temperature

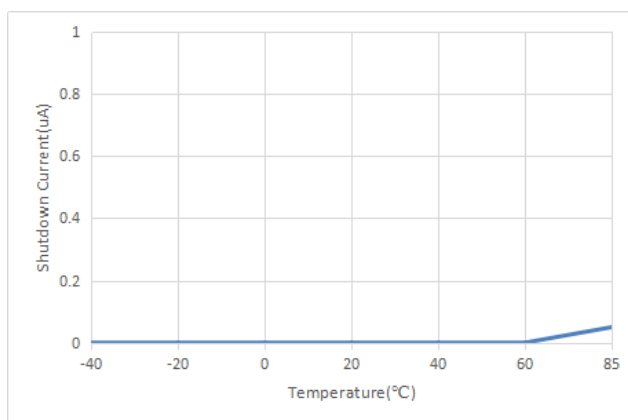


Shutdown Current VS Temperature

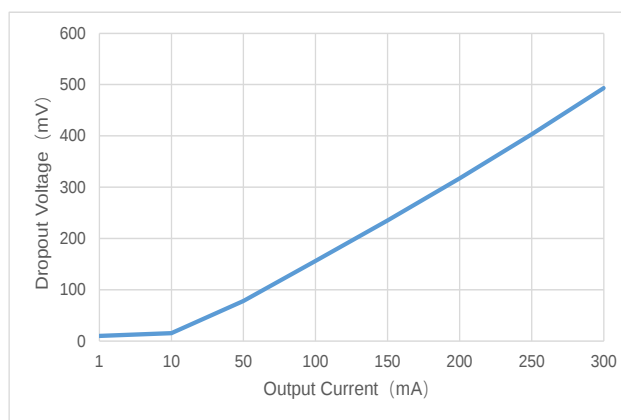


Dropout Voltage VS Output Current


ET631XX

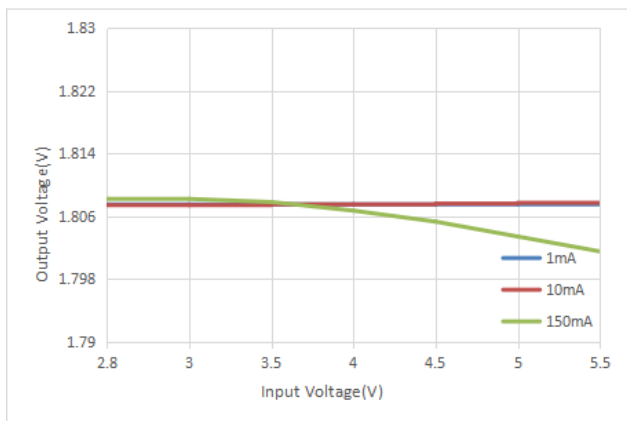


Output Voltage VS Input Voltage

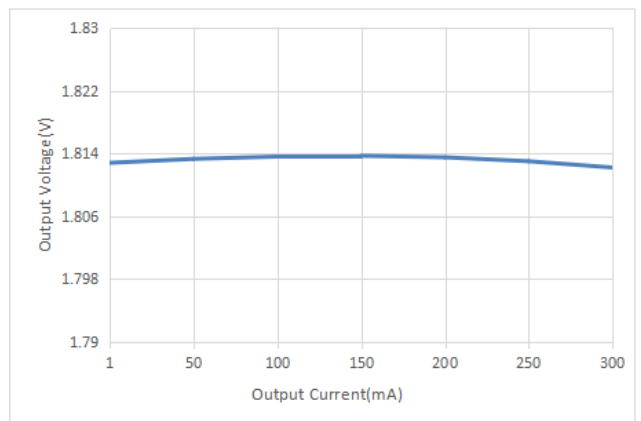


Output Voltage VS Output Current

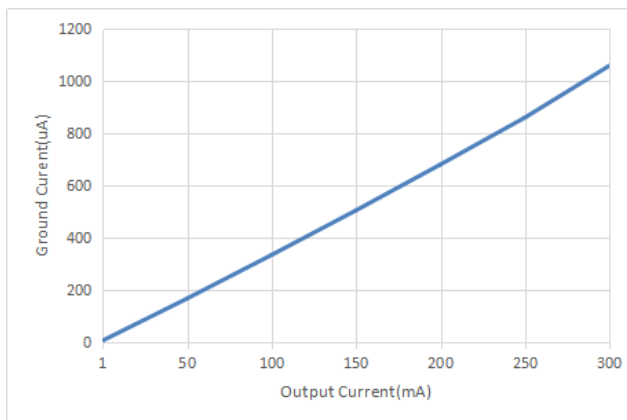


Ground Current VS Output Current

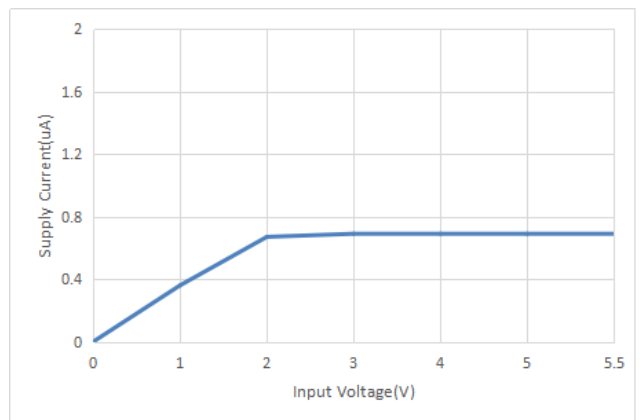

Supply Current VS Input Voltage

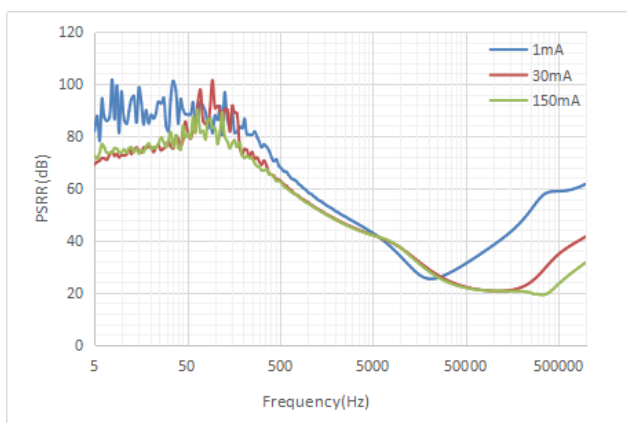


PSRR VS Output Current

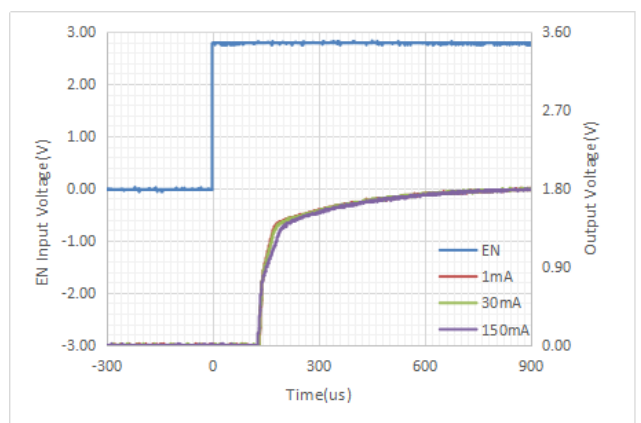


Turn On Speed VS EN Voltage


ET631XX

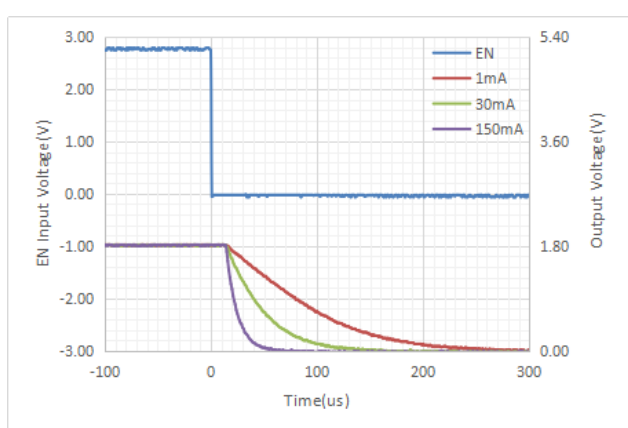

Turn Off Speed VS EN Voltage

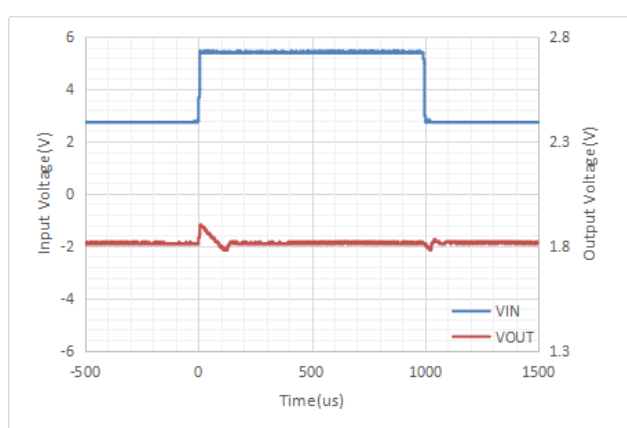


Line Transient Response

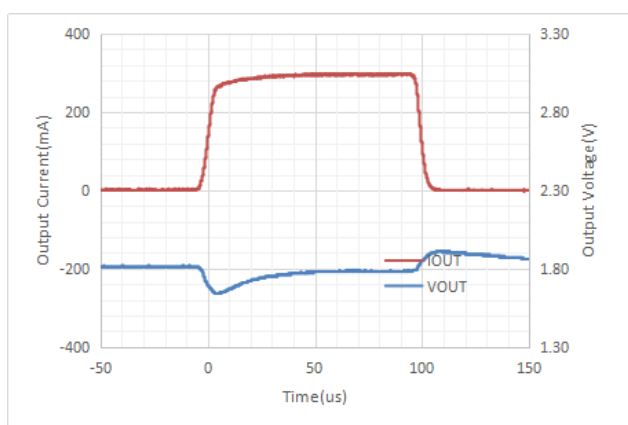


Load Transient Response

(3) VOLTAGE VERSION 2.5V

($V_{IN}=3.5V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

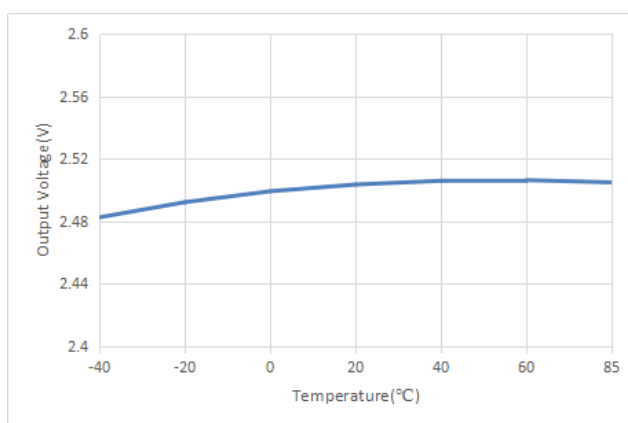


Output Voltage VS Temperature

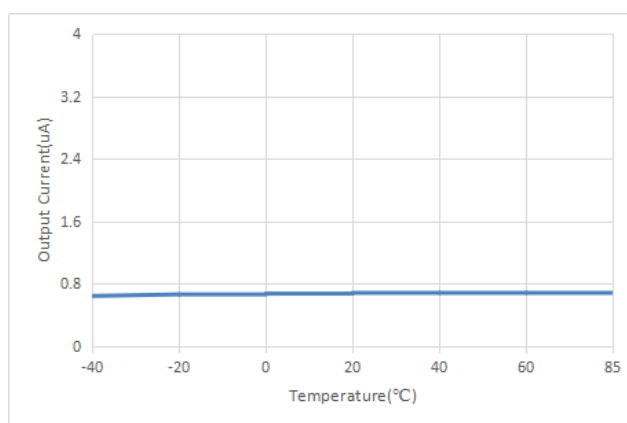


Supply Current VS Temperature


ET631XX

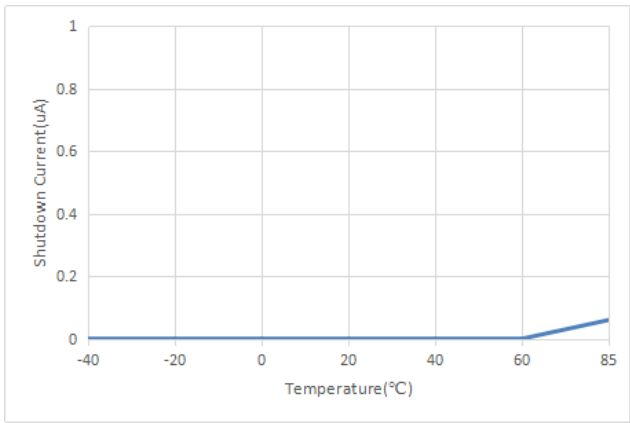


Shutdown Current VS Temperature

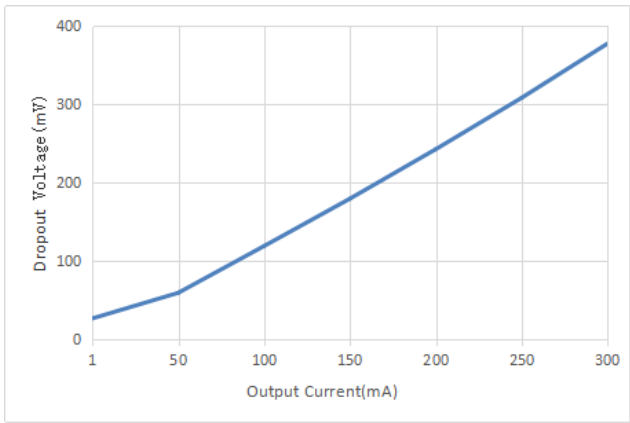


Dropout Voltage VS Output Current

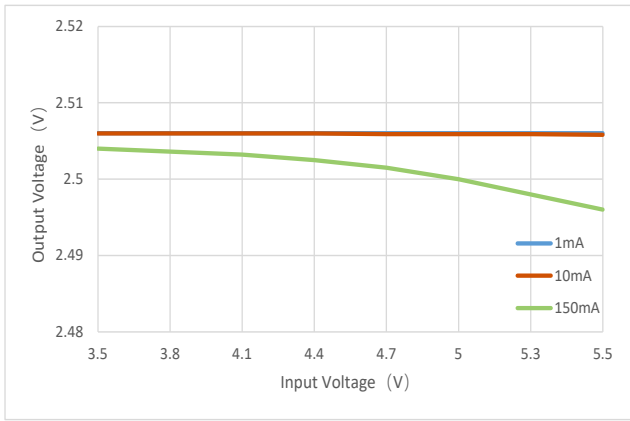


Output Voltage VS Input Voltage

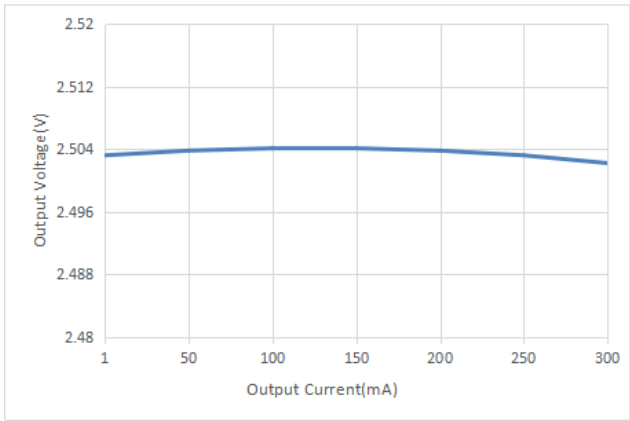

Output Voltage VS Output Current

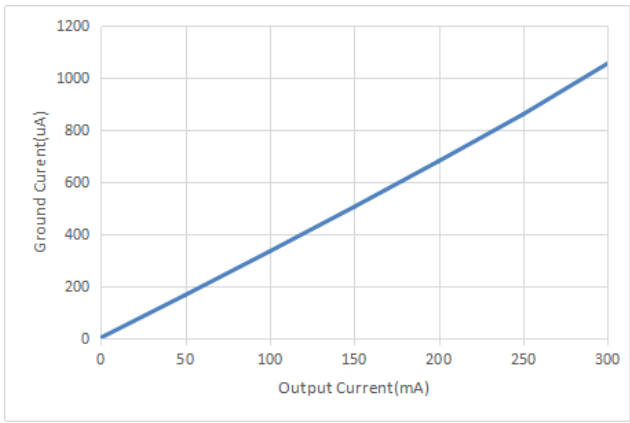


Ground Current VS Output Current

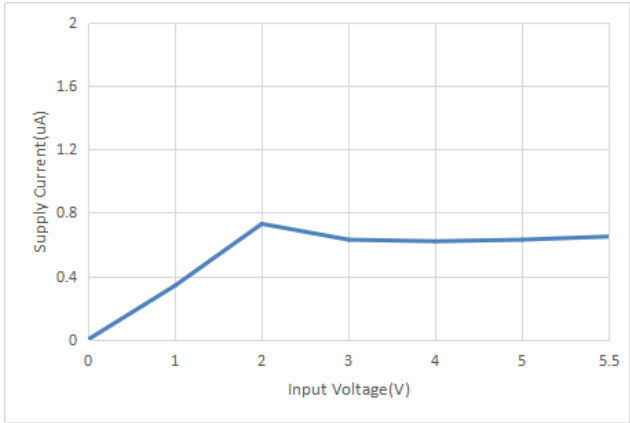


Supply Current VS Input Voltage


ET631XX

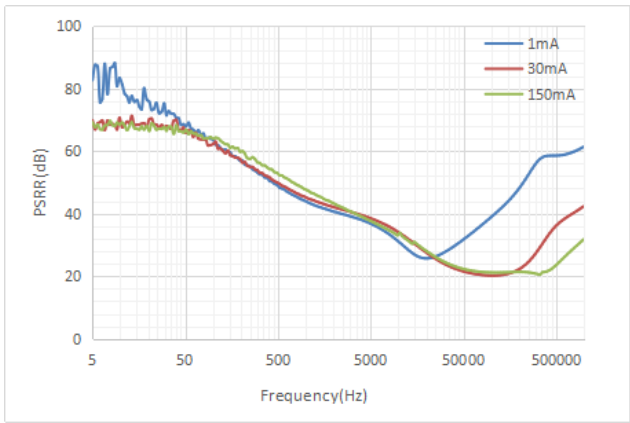


PSRR VS Output Current

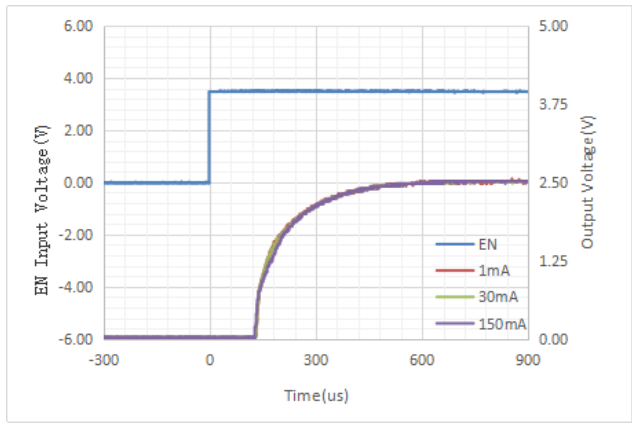


Turn On Speed VS EN Voltage

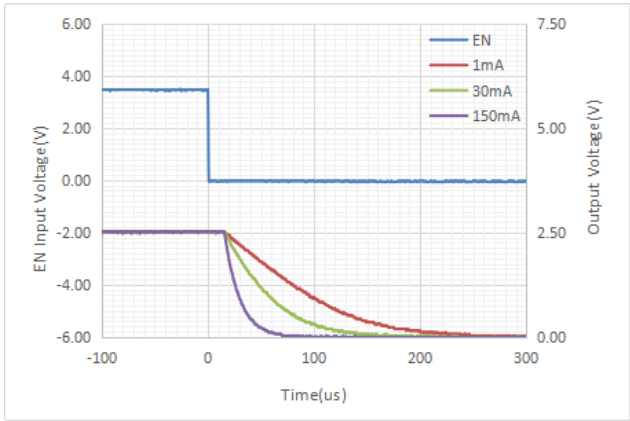

Turn Off Speed VS EN Voltage

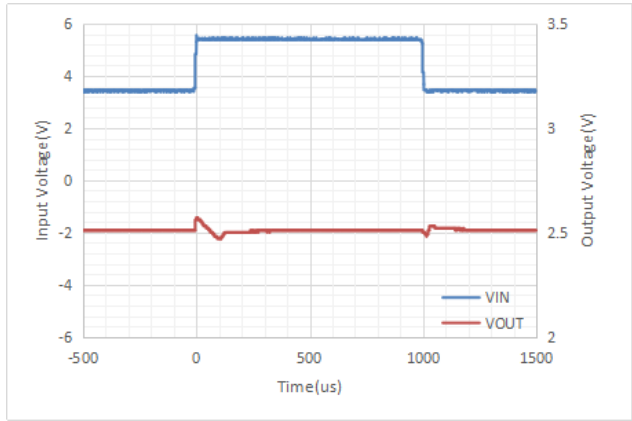

Line Transient Response

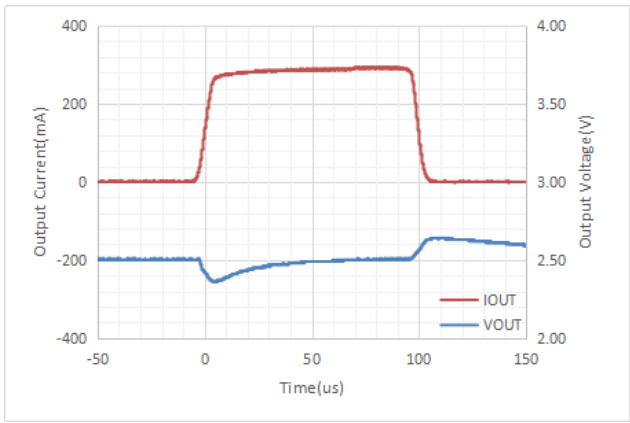


Load Transient Response


ET631XX

(4) VOLTAGE VERSION 2.8V


($V_{IN}=3.8V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

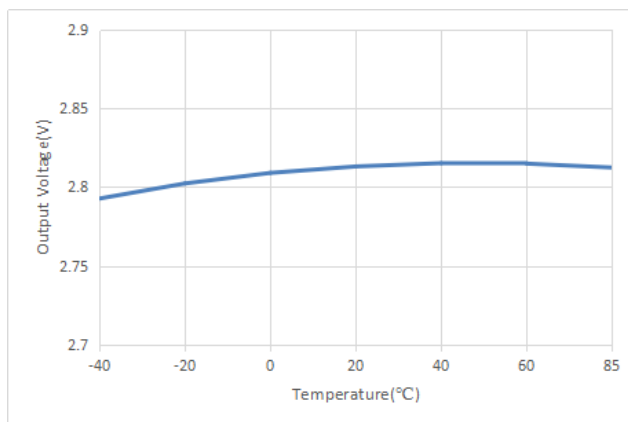


Output Voltage VS Temperature

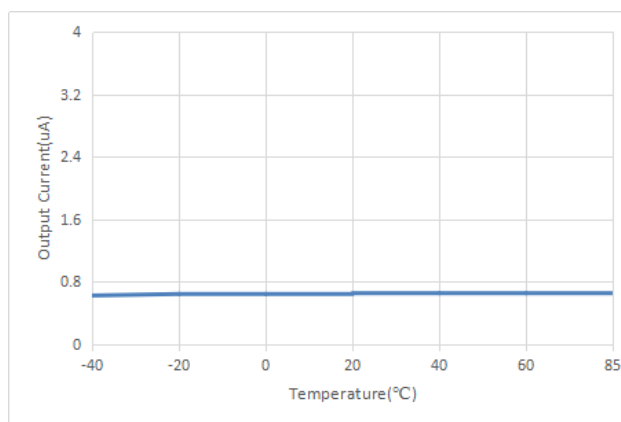


Supply Current VS Temperature

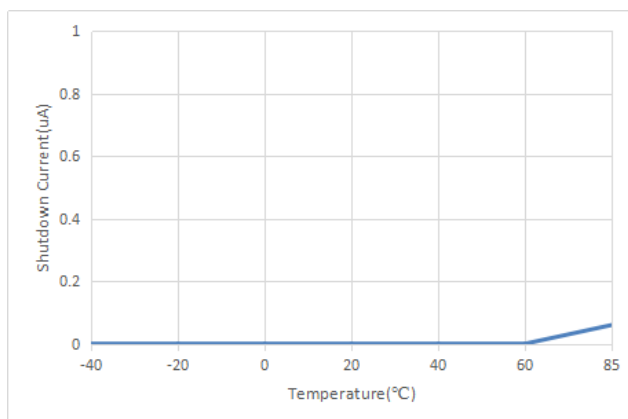


Shutdown Current VS Temperature

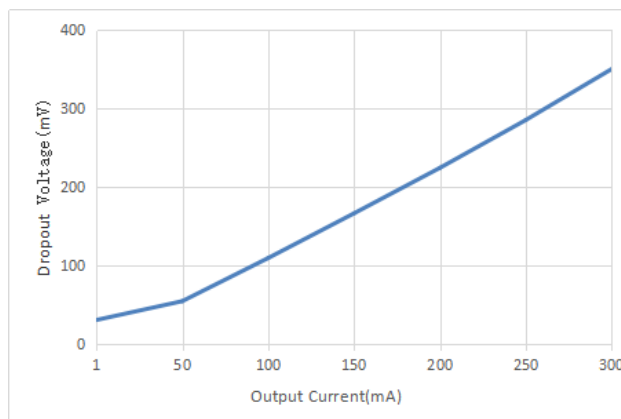

Dropout Voltage VS Output Current

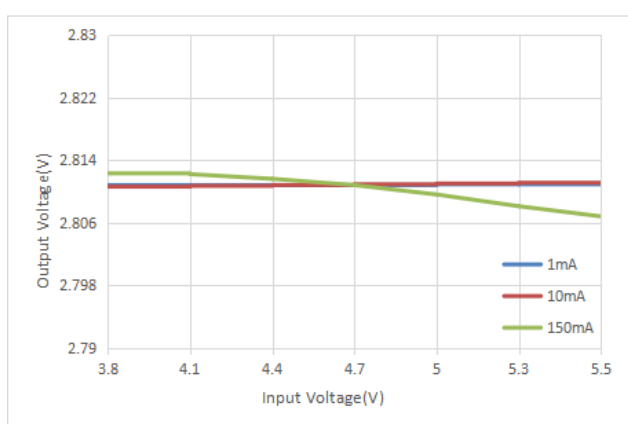


Output Voltage VS Input Voltage

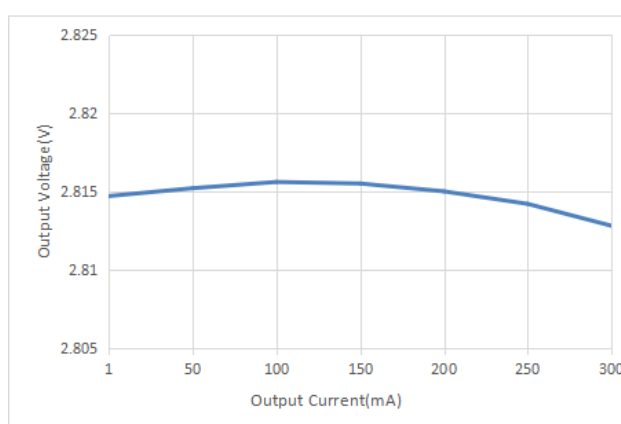


Output Voltage VS Output Current


ET631XX

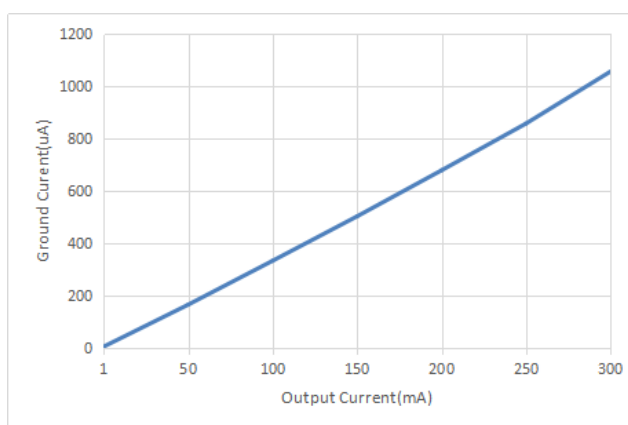


Ground Current VS Output Current

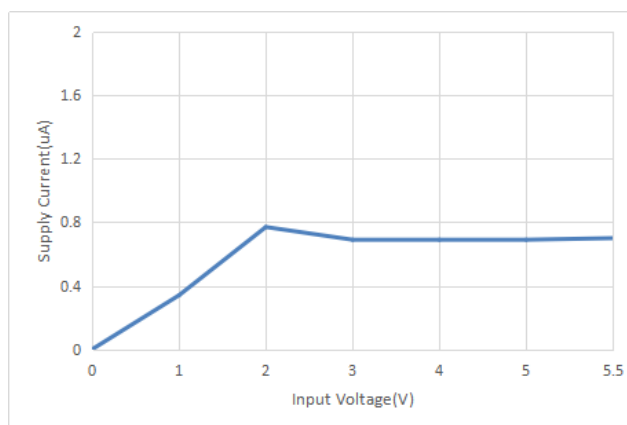


Supply Current VS Input Voltage

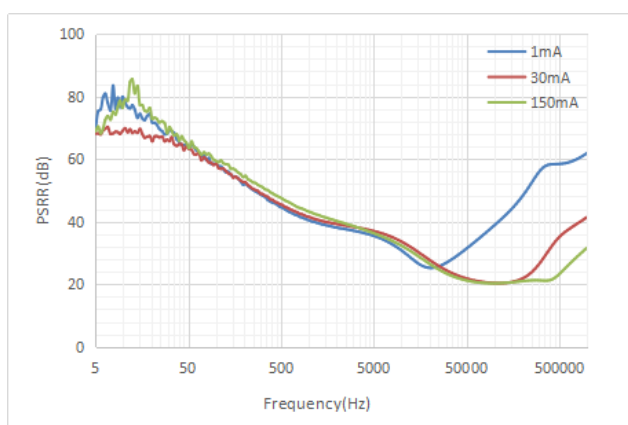


PSRR VS Output Current

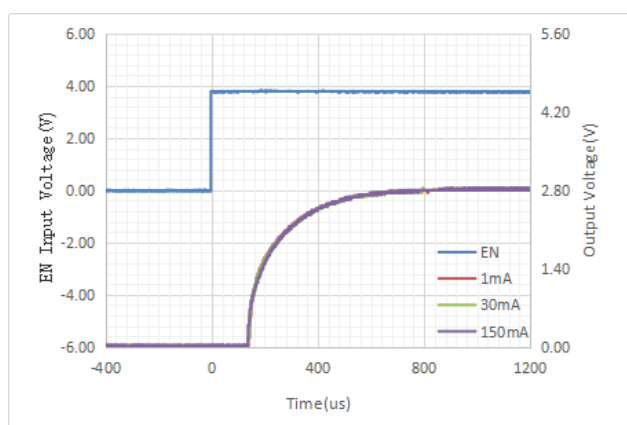

Turn On Speed VS EN Voltage

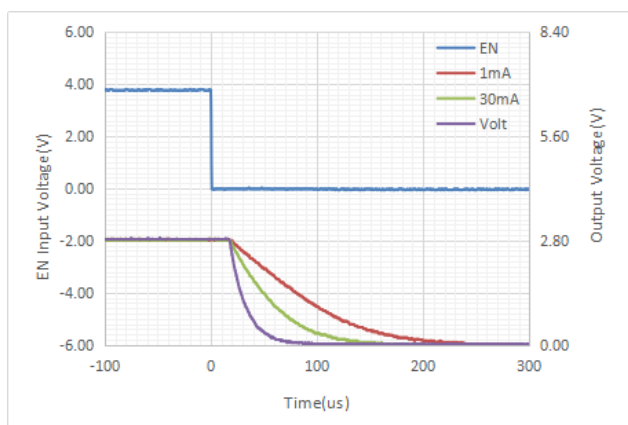


Turn Off Speed VS EN Voltage

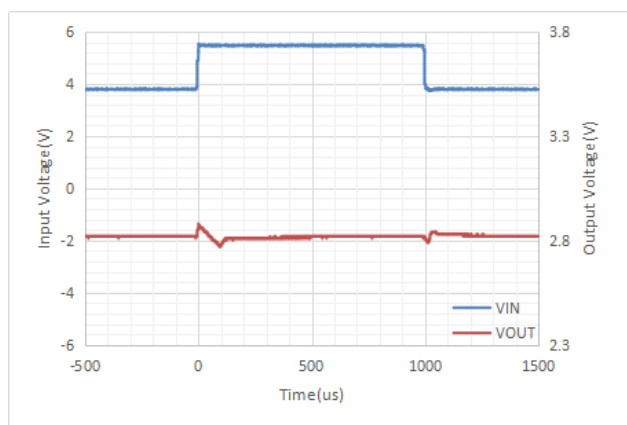

Line Transient Response


ET631XX

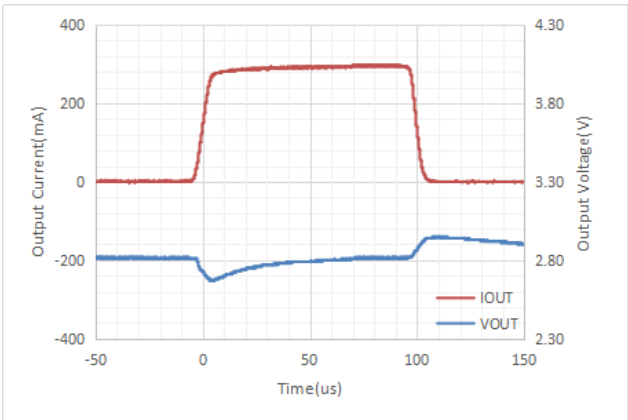


Load Transient Response

(5) VOLTAGE VERSION 3.0V


($V_{IN}=4.0V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

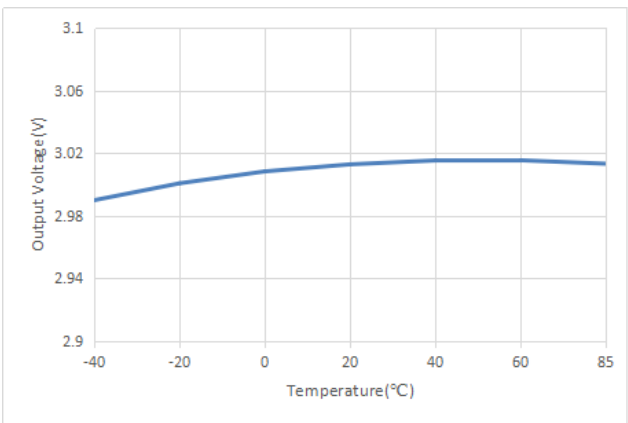


Output Voltage VS Temperature

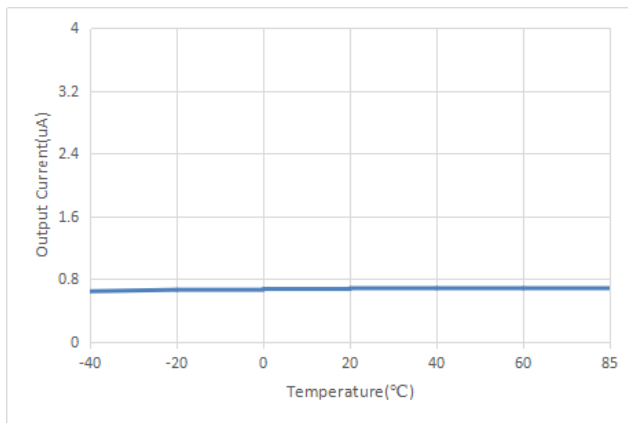

Supply Current VS Temperature

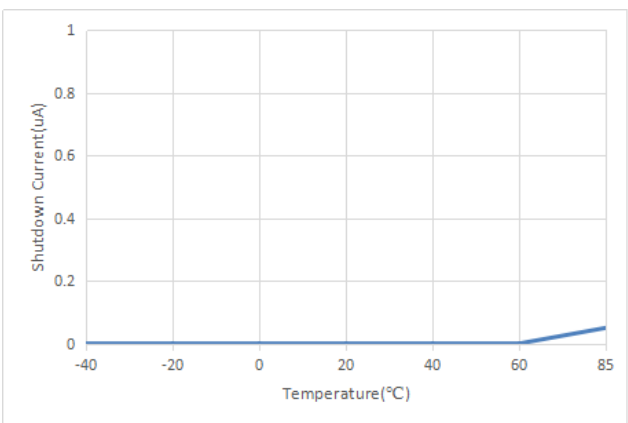


Shutdown Current VS Temperature

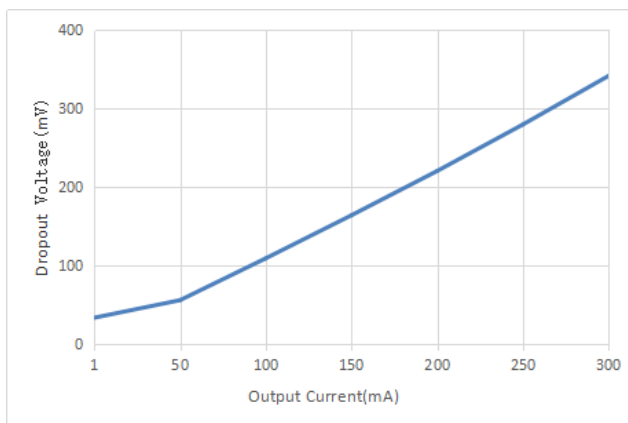


Dropout Voltage VS Output Current


ET631XX

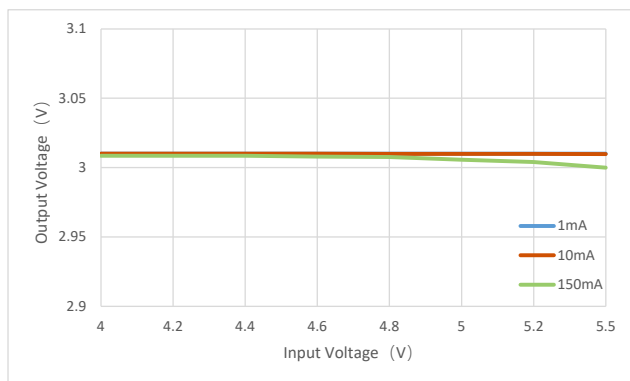


Output Voltage VS Input Voltage

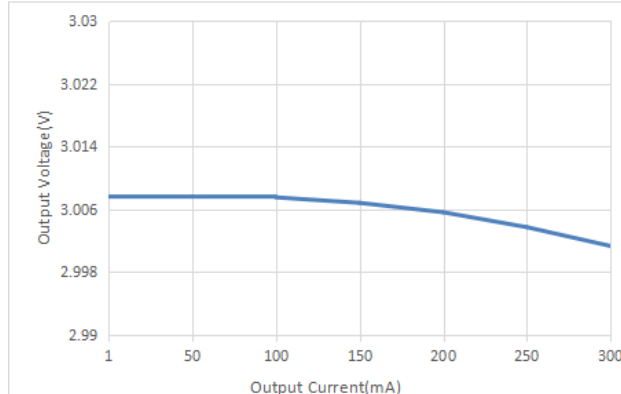


Output Voltage VS Output Current

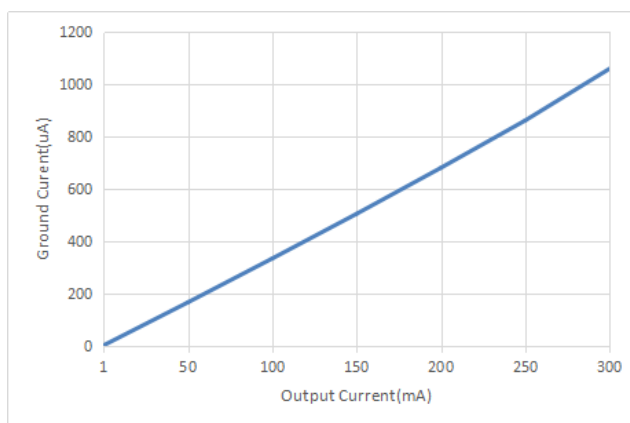


Ground Current VS Output Current

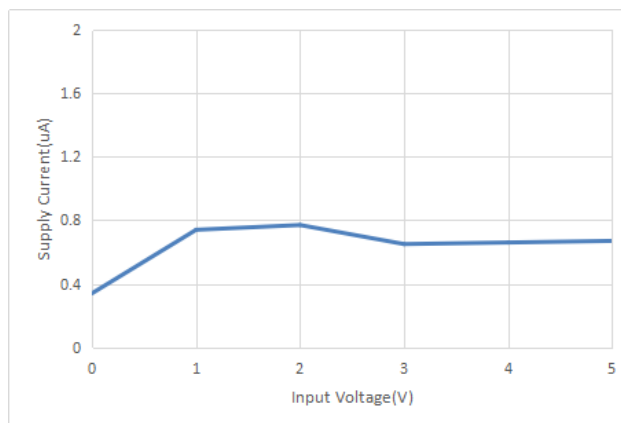

Supply Current VS Input Voltage

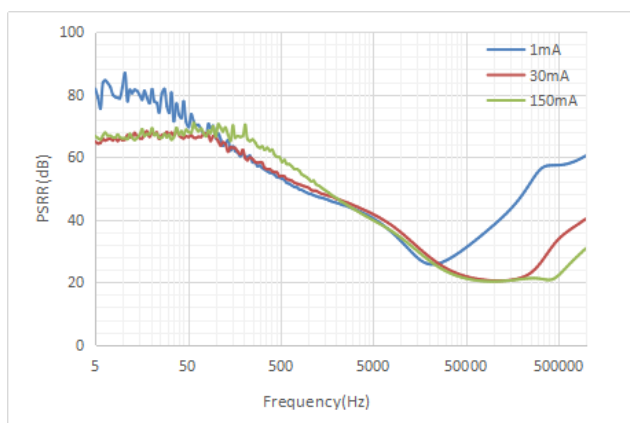


PSRR VS Output Current

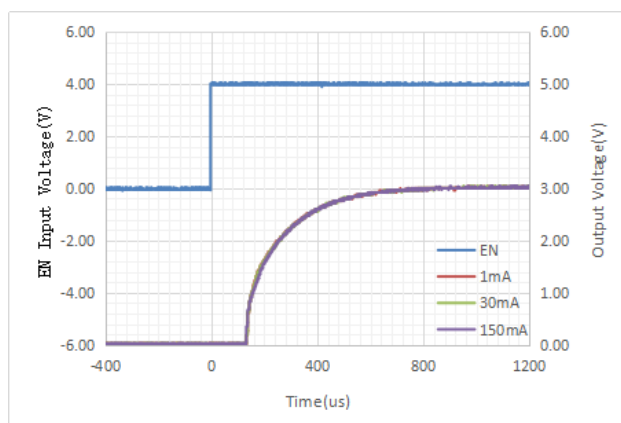


Turn On Speed VS EN Voltage


ET631XX

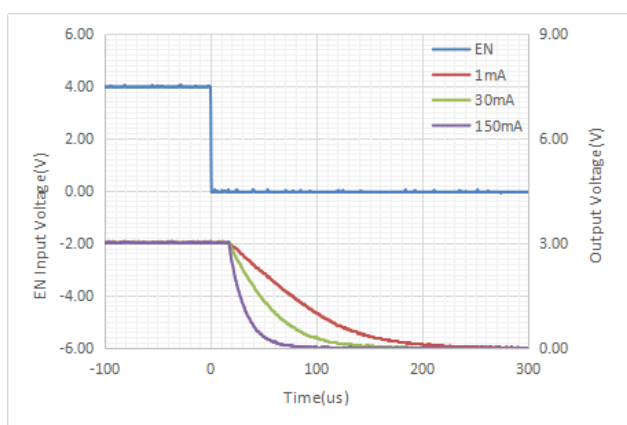

Turn Off Speed VS EN Voltage

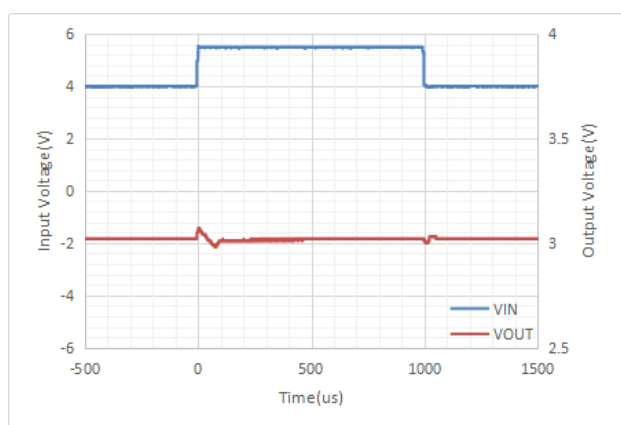


Line Transient Response

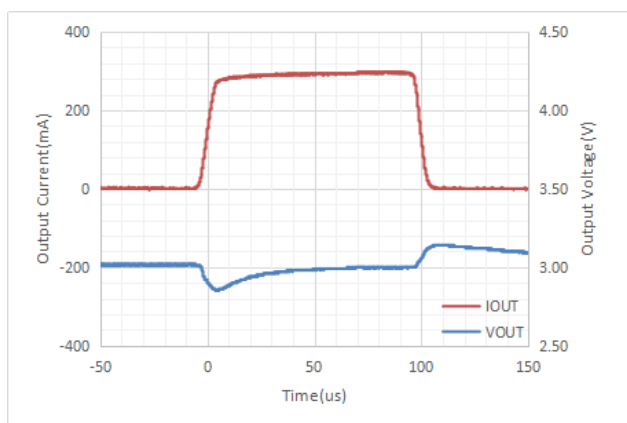


Load Transient Response

(6) VOLTAGE VERSION 3.3V

($V_{IN}=4.3V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1.0\mu F$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.)

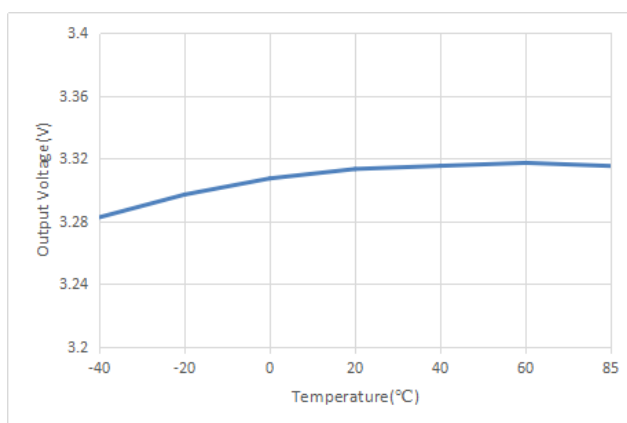


Output Voltage VS Temperature

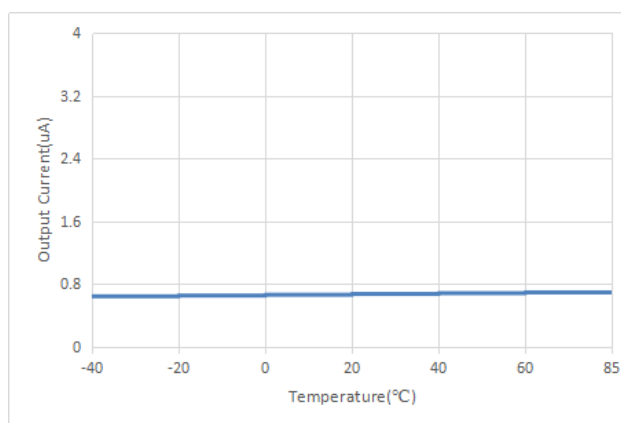


Supply Current VS Temperature


ET631XX

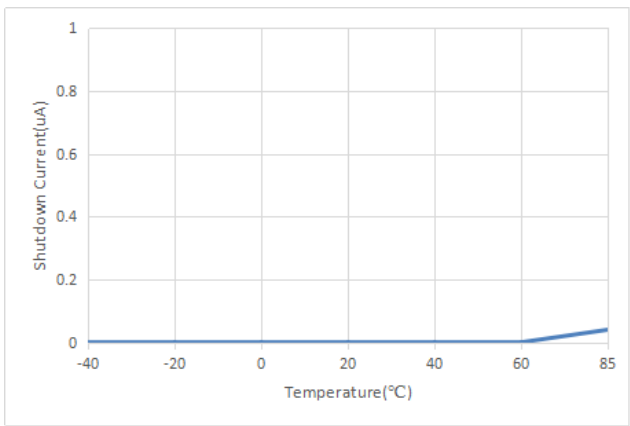


Shutdown Current VS Temperature

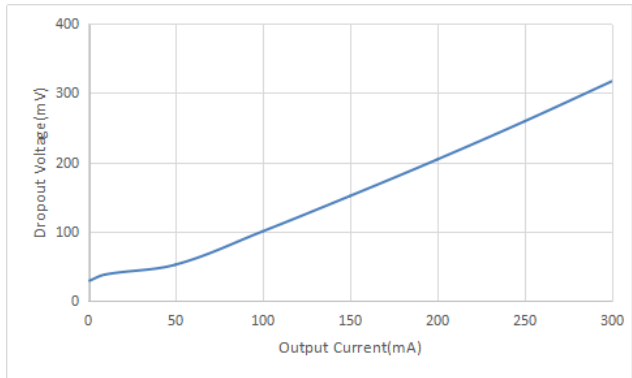


Dropout Voltage VS Output Current

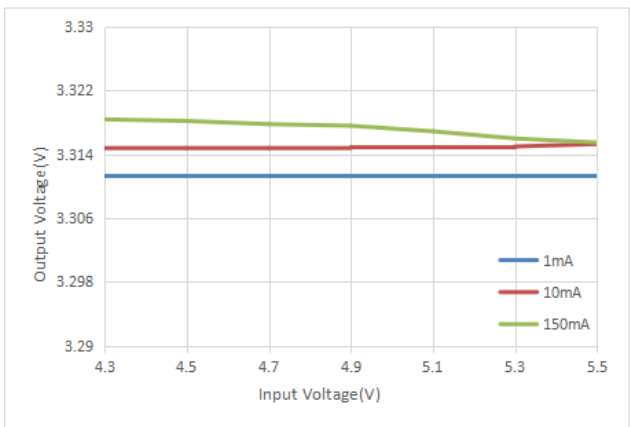


Output Voltage VS Input Voltage

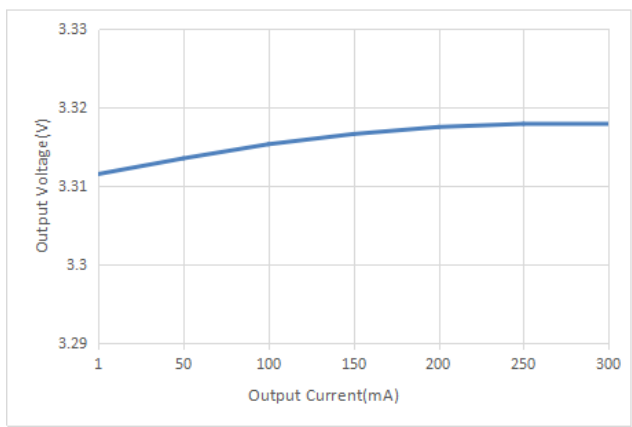

Output Voltage VS Output Current

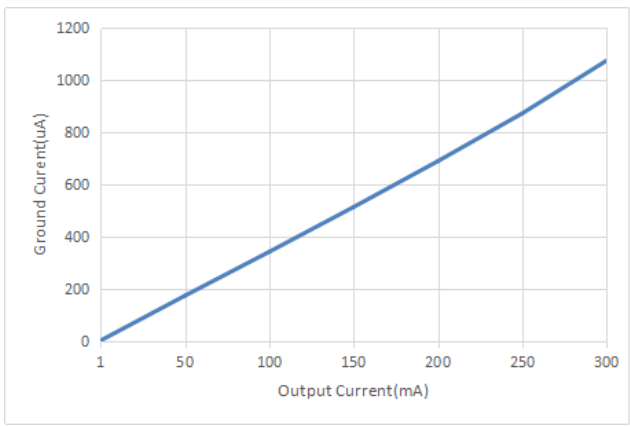


Ground Current VS Output Current

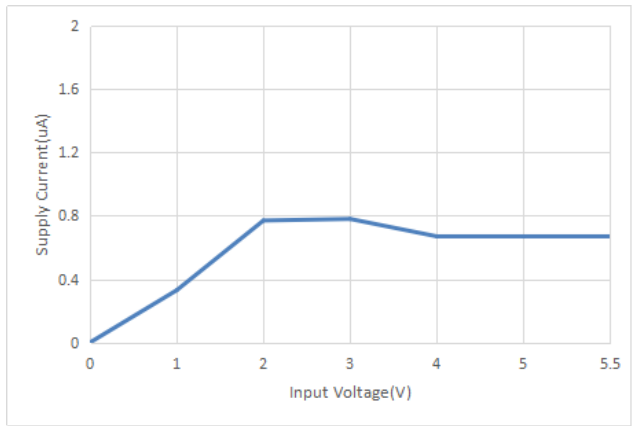


Supply Current VS Input Voltage


ET631XX

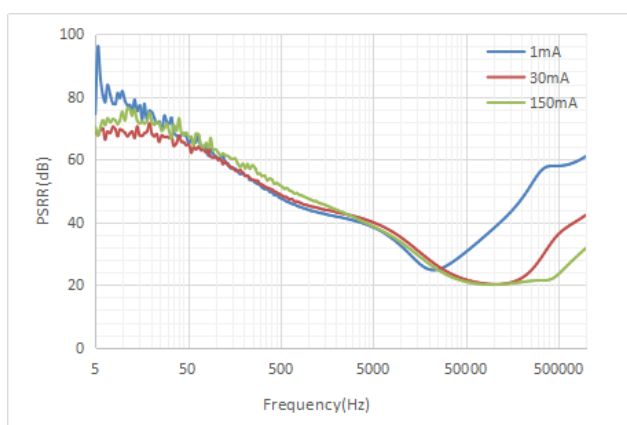


PSRR VS Output Current

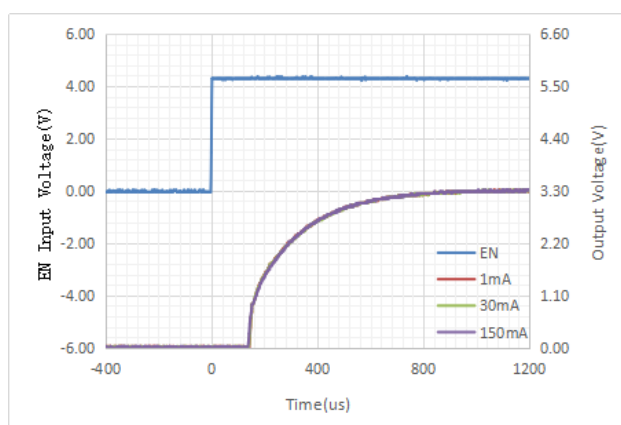


Turn On Speed VS EN Voltage

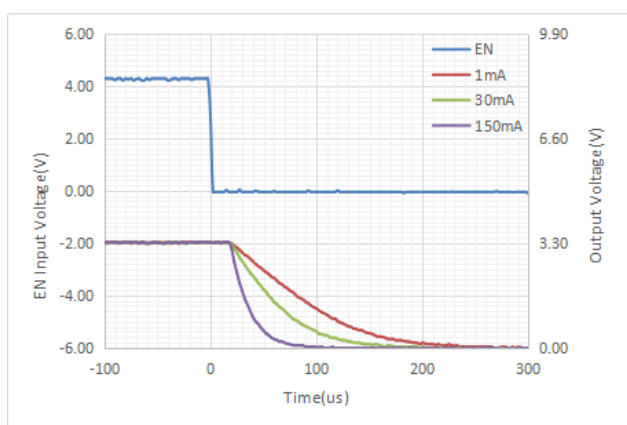

Turn Off Speed VS EN Voltage

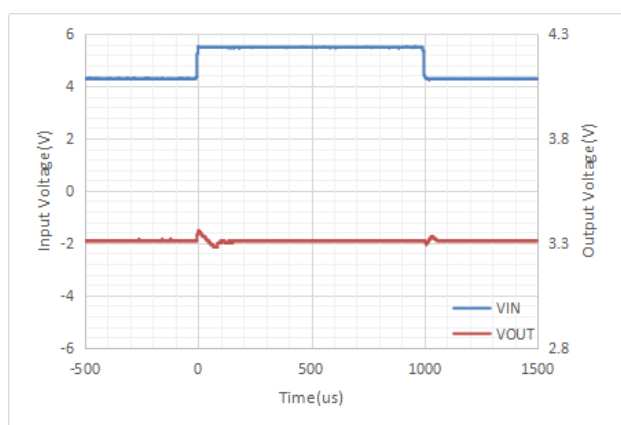


Line Transient Response

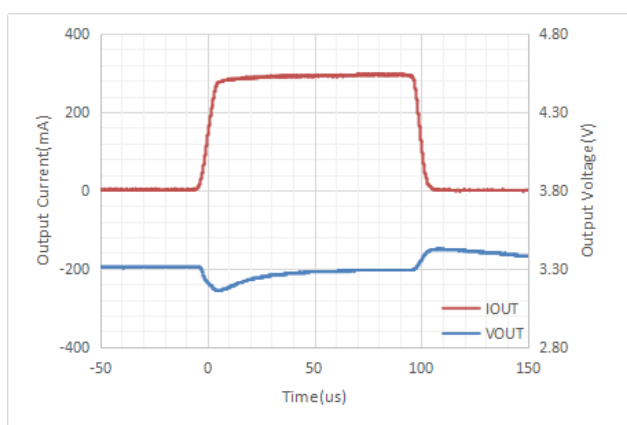


Load Transient Response

ET631XX

Application Circuits

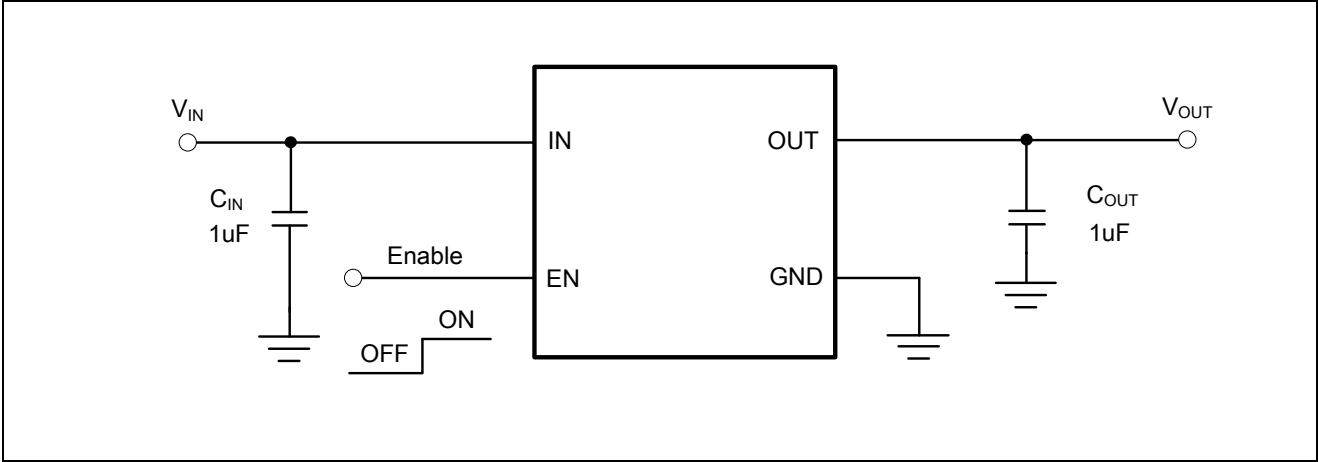




PCB Layout Guide

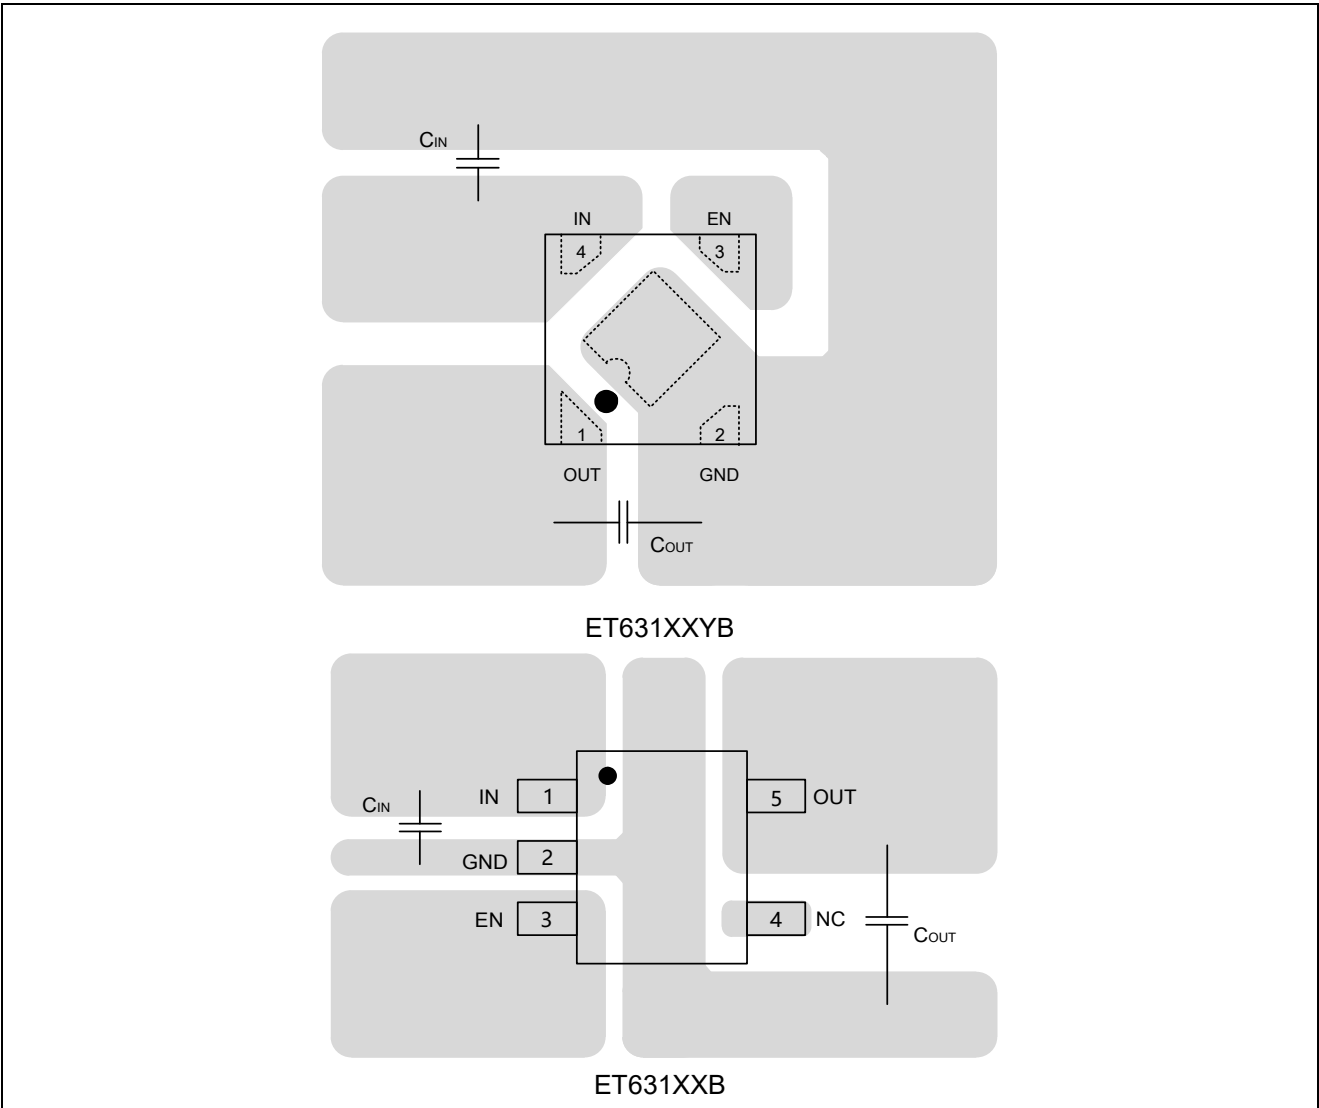

ET631XX


Package Dimension

DFN4

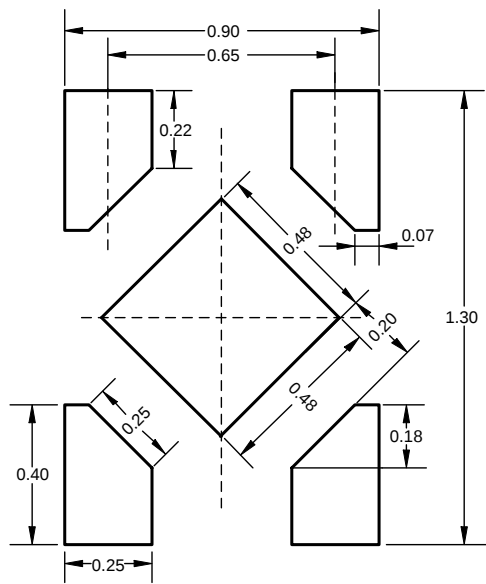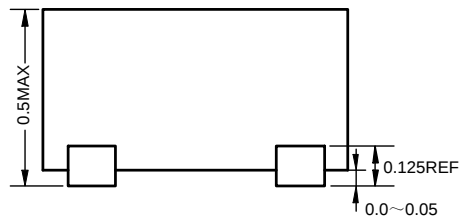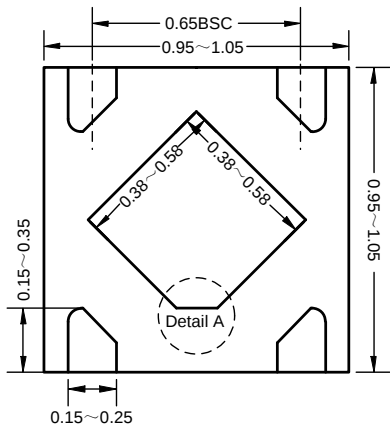

Recommended Land Pattern


Detail A: (PIN1 shape)

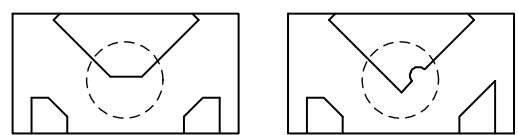

Unit: mm

ET631XX

SOT23-5

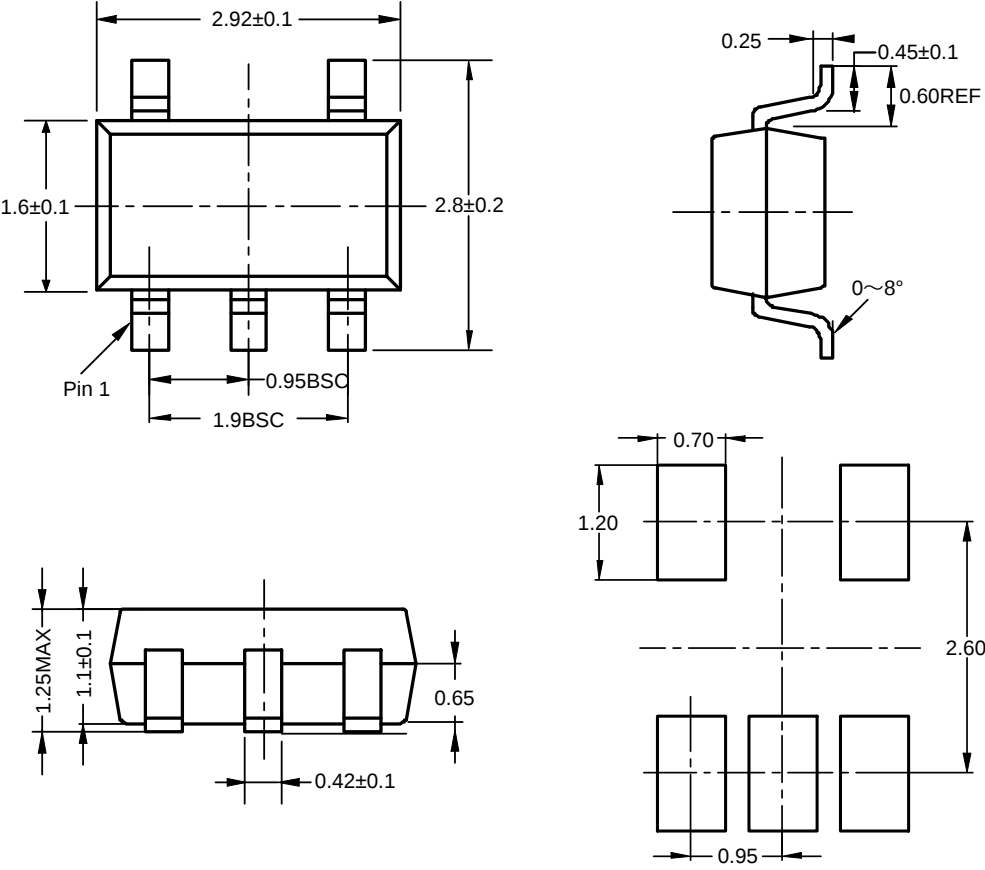

Recommended Land Pattern

Unit: mm

ET631XX

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2019-01-11	Original Version	Liuxm	Liuxm	Zhuji
1.1	2019-09-26	Add the upper and lower limit of some parameters in EC table	Liuxm	Liuxm	Zhuji
1.2	2019-10-22	Add PSRR and typical characteristic graph	Liuxm	Liuxm	Liuji
1.3	2020-03-13	Document check and formalize	Liuxm	Liuxm	Liuji
1.4	2020-03-30	Update dropout voltage graph	Liuxm	Liuxm	Liuji
1.5	2022-8-8	Update Typeset	Yang Xiao Xu	Liuxm	Yang Xiao Xu
1.6	2022-12-13	Add SOT23-5	Shibo	Liuxm	Yang Xiao Xu
1.7	2023-10-10	Update package picture	Shibo	Liuxm	Liuji
1.8	2025-1012	Add Tape information and etc	Shibo	Liu Yi Guo	Liuji