

## 4.5 ~ 5.5V, 0.73 ~ 5A, Current Limit Power Switch

### General Description

The ET20171 is a current limit N-Channel MOSFET power switch. It is designed to protect circuitry on the output from transients on the input. It also protects the input from undesired shorts and transients coming from the output.

The current limit magnitude is controlled by an external resistor from ILIMIT to GND. It is fixed 0.73A when ILIMIT is floating. Programmable soft-start time controls the slew rate of the output voltage during the start-up time. It can be controlled by the DV/DT pin setting.

The output voltage will be clamped at 6.1V when the input voltage exceeds 6.1V.

### Features

- $V_{IN}$  Operating Range: 4.5V to 5.5V,  $V_{IN\_MAX}=20V$
- Fixed Over-Voltage Clamp: 6.1V
- Fault Response After OTP: Latched
- Programmable Current Limit and Soft-Start Time
- Short-Circuit Protection
- Typical  $R_{ON}$ : 31m $\Omega$  From Input to Output Power Path
- Very Low Quiescent Current: 100 $\mu$ A (Typ)
- Over-Current Protection
- Internal Thermal Shutdown Protection
- ESD Human Body Model Protected: All pins  $\pm$  2KV Pass
- Package Information


Part No.	Package	Packing Option	MSL
ET20171	DFN10 (3mm $\times$ 3mm)	Tape and Reel, 3K/Reel	Level 1

### Application

- SSD Hard Disk
- PC Cards
- Wireless Modem Data Cards
- USB Power Distribution/USB Protection
- Server PC

# ET20171

## Pin Configuration

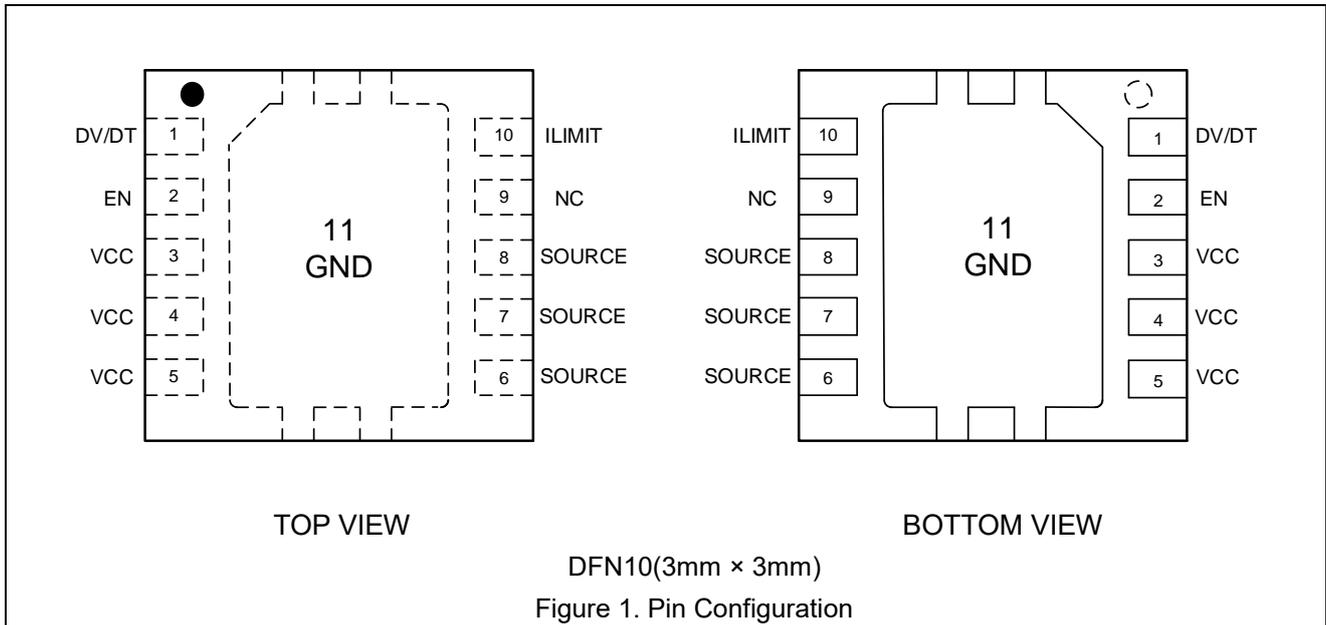

## Pin Function

Pin	Name	Description
1	DV/DT	Soft start programming pin. Connect a capacity from DV/DT to GND to set the DV/DT slew rate.
2	EN	This is a dual function control pin. When used as an ENABLE pin and pulled down, it shuts off the internal pass MOSFET. When pulled high, it enables the device. As an UVLO pin, it can be used to program different UVLO trip point via external resistor divider.
3,4,5	VCC	Power supply input. Must be closely decoupled to GND pins with a 1uF or greater ceramic capacitor. Connect VCC using a wide PCB trace.
6,7,8	SOURCE	Source of internal power n-channel MOSFET and the output terminal.
9	NC	Not Connected Internally. Can be left floating or grounded.
10	ILIMIT	Current limit programming pin. Program the current limit by connecting a resistor to GND. Floating ILIMIT pin to achieve a 0.73A fixed current limit.
11	GND	Ground pin.

# ET20171

## Block Diagram

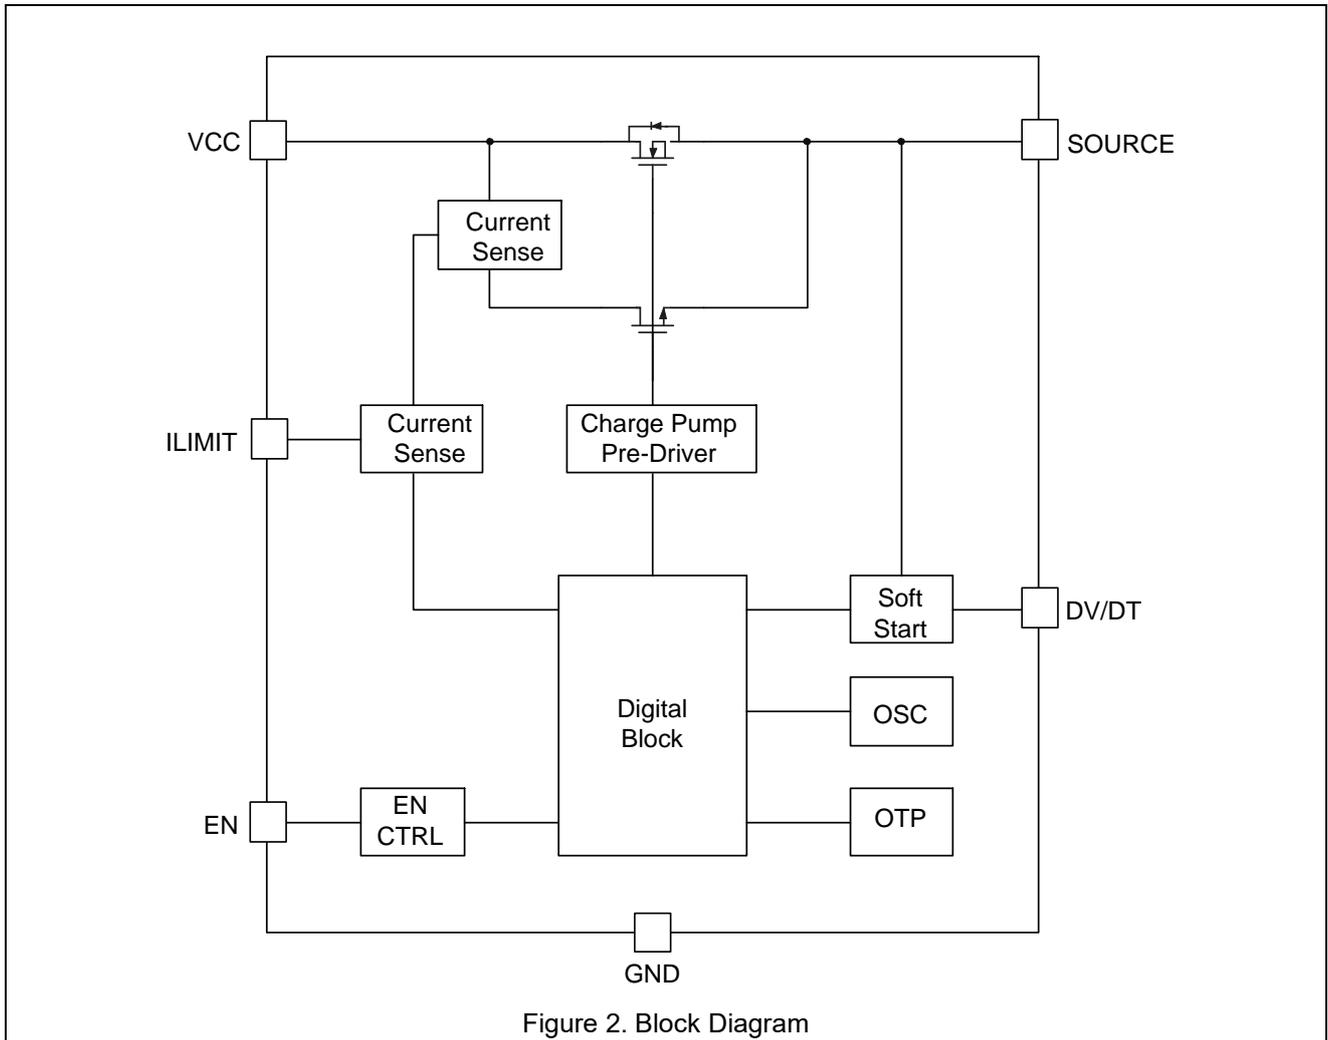


Figure 2. Block Diagram

# ET20171

---

## Operation

ET20171 is an an integrated power switch with a low  $R_{DS(ON)}$  N-Channel MOSFET. When the ET20171 turns on, it can deliver up to 5A continuous current to load. When the device is active, the device only consumes 100uA supply current if no load.

## Power Supply Considerations

At least 1uF MLCC capacitor between VCC and GND, close to the device, is recommended. Placing a high-value electrolytic capacitor on the output pin is recommended when the output load is heavy. This precaution reduces power-supply transients that may cause ringing on the input and minimize the input voltage droops. Additionally, bypassing the output with a 10uF MLCC capacitor improves the immunity of the device to short-circuit transients.

## Over-Voltage Clamp

The recommended operating voltage range is 4.5V~5.5V. The device can continuously sustain a voltage of 20V on VCC pin. However, above the recommended maximum bus voltage, the device is in over-voltage protection (OVP) mode, limiting the output voltage to  $V_{OVC}$ . The power dissipation in OVP mode is  $P_{D\_OVP} = (VCC - V_{OVC}) \times I_{Load}$ , which can potentially heat up the device and cause thermal shutdown.

## Current Limit (ILIMIT)

A sense FET is employed to check for over current conditions. When an over current condition is detected, the device maintains a constant output current and reduces the output voltage accordingly. ET20171 will limit the current until the overload condition is removed or the device begins to thermal cycle.

The current limit can be programmed by an external resistor. It can be approximated with equation below.

$$I_{LIMIT} = 0.7 + 3 \times 10^{-5} \times R_{LIMIT}$$

The ET20171 allows  $I_{LIMIT}$  to be floated during operation. The internal fixed current limit threshold is set at 0.73A. The current limit response time is about 20us<sup>(1)</sup>.

## Short-Circuit Protection (SCP)

During a transient short circuit event, the current through the device increases very rapidly. The current-limit amplifier cannot respond very quickly to this event due to its limited bandwidth. Therefore, the ET20171 incorporates a fast-trip comparator, which shuts down the pass device very quickly when  $I_{OUT} > I_{FASTRIP}$ , and terminates the rapid short-circuit peak current. The trip threshold is set to 50% higher than the programmed overload current limit ( $I_{FASTRIP} = 1.5 \times I_{LIMIT}$ ). After the transient short-circuit peak current has been terminated by the fast-trip comparator, the current limit amplifier smoothly regulates the output current to  $I_{LIMIT}$ .

To prevent safe operating area (SOA) damage during a high input voltage short-circuit protection(SCP) condition, the IC current limit folds back when the power MOSFET VDS voltage is above the typical 5.5V and the junction temperature is over 100°C.

# ET20171

---

## Soft Start

The soft start time can be set by an external capacity connecting from DV/DT to GND. The soft start time can be calculated with Equation:

$$t_{DVDT} = \frac{VCC}{GAIN} \times (C_{DVDT} + 70pF) / I_{DVDT} = 10^6 \times VCC \times (C_{DVDT} + 70pF)$$

where:

- GAIN=8V
- $I_{DVDT}=125nA$

The dV/dt slew rate is determined by external DVDT capacitor.

## Thermal Protection - Latched

Thermal protection prevents damage to the IC when heavy-overload or short-circuit faults are present for extended periods of time. The ET20171 implements a thermal sensing to monitor the operating junction temperature of the power MOSFET. In an over-current or short-circuit condition, the junction temperature rises due to excessive power dissipation.

Once the die temperature rises to approximately 155°C due to over-current conditions, the internal thermal sense circuitry turns the power switch off, thus preventing the power switch from damage. The chip will restart when re-enable or re-power-on.

**Note1:** Test condition is as  $V_{IN}=5V$ ,  $I_{LIMIT}=3.7A$ ,  $T_A=25^\circ C$ ,  $C_{OUT}=0\mu F$ . Current Limit Response Time is the time difference between  $I_{OUT}$  first exceeding  $I_{LIM}$  and falling back to  $I_{LIM}$ . and falling back to  $I_{LIMIT}$ . Short-circuit Response Time is the time difference between  $I_{OUT}$  exceeding  $I_{FASTRIPO}$  and falling back to 0A.

# ET20171

## Absolute Maximum Ratings

Symbol	Parameters	Min	Max	Unit	
V <sub>CC</sub> , V <sub>SOURCE</sub>	V <sub>CC</sub> , SOURCE to GND	-0.3	20	V	
V <sub>ILIMIT</sub> , V <sub>EN</sub> , V <sub>DVDT</sub>	ILIMIT, EN, DV/DT to GND	-0.3	7	V	
P <sub>D</sub>	Power Dissipation at T <sub>A</sub> = +85°C <sup>(2)</sup>		1.05	W	
T <sub>J</sub>	Junction Temperature	-40	+150	°C	
T <sub>STG</sub>	Storage Junction Temperature	-65	+150	°C	
T <sub>SOLD</sub>	Soldering Temperature (reflow)		+260	°C	
V <sub>ESD</sub>	Electrostatic Discharge Capability	Human Body Mode, ESDA/JEDEC JS-001-2023	-2.0	+2.0	KV
		Charged Device Mode, ESDA/JEDEC JS-002-2022	-1.5	+1.5	KV

**Note2:** The maximum allowable Power Dissipation is recording to maximum allowable Junction Temperature.

$$P_{D(MAX)}@T_A=(T_{J(MAX)}-T_A)/\theta_{JA}.$$

## Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V <sub>IN</sub>	DC Input Voltage	4.5	5.5	V
I <sub>OUT</sub>	DC Output Current Limit	0.73	5.0	A
T <sub>A</sub>	Operating Temperature Range	-40	+85	°C

# ET20171


## Electrical Characteristics

Unless otherwise noted,  $V_{CC}=5V$ ,  $R_{LIMIT}=NS$ ,  $C_{DVDT}=Float$ ,  $C_{OUT}=10\mu F$ ,  $T_A=-40^{\circ}C$  to  $85^{\circ}C$ , typical value is tested at  $T_A=25^{\circ}C$ .

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
<b>Basic Operation</b>						
$V_{IN}$	Input Voltage		4.5		5.5	V
$I_Q$	$V_{IN}$ Quiescent Current	$V_{EN} = High$		100	150	$\mu A$
$I_S$	$V_{IN}$ Shutdown Current	$V_{EN} = GND$		6	25	$\mu A$
<b>Power MOSFET</b>						
$R_{ON}$	On-Resistance of Switch IN-OUT	$R_{LIMIT}=100K\Omega$ , $I_{OUT}=1A$		31	60	$m\Omega$
$t_{DELAY}$	Turn-on Delay Time	EN/UVLO $\rightarrow$ H, $I_{VCC} = 100mA$ , 1A resistive load at SOURCE		280		$\mu s$
$I_{OFF}$	Off-state Output Leakage Current	$V_{CC} = 5V$ , $V_{EN} = GND$		0.1	3	$\mu A$
$V_{UVLO\_R}$	Under Voltage Lockout Threshold	$V_{IN}$ Rising	4.15	4.3	4.5	V
$V_{UNLOHYS}$	UVLO Hysteresis			190		mV
$V_{OVC}$	Over-voltage clamp	$V_{CC}>6.75 V$ , $I_{OUT}=10mA$	5.5	6.1	6.75	V
<b>DV/DT</b>						
$t_{DVDT}$	Output Ramp Time	EN $\rightarrow$ H to $V_{SOURCE} = 4.8V$ , $V_{CC}=5V$ , $C_{DVDT} = 0$	0.3	0.6	1	ms
$V_{DVDT\_MAX}$	DV/DT Max Capacitor Voltage			5		V
$I_{DV/DT}$	DV/DT Current	$V_{DV/DT} = 0.5V$		125		nA
$GAIN_{DVDT}^{(3)}$	DV/DT to OUT Gain			8		V/V
<b>Current Limit</b>						
$I_{LIMIT\_NO}$	Current Limit at Normal Operation	$I_{LIMIT} Float$ , $V_{CC}=5V$		0.73		A
		$R_{LIMIT} = 0\Omega$ , $V_{CC}=5V$		0.84		A
		$R_{LIMIT} = 10K\Omega$ , $V_{CC}=5V$		1.1		A
		$R_{LIMIT} = 45.3K\Omega$ , $V_{CC}=5V$	1.79	2.07	2.42	A
		$R_{LIMIT} = 100k\Omega$ , $V_{CC}=5V$	3.46	3.7	4.03	A
		$R_{LIMIT} = 150k\Omega$ , $V_{CC}=5V$	4.5	5.0	5.7	A
$I_{LIM\_B}$	ILIM Bias Current	$R_{LIMIT}=0\Omega$		10		$\mu A$
<b>Enable (EN)</b>						
$V_{EN\_RISING}$	EN Rising Threshold		1.37	1.45	1.54	V
$V_{EN\_HYS}$	EN Hysteresis			250		mV
<b>OTP</b>						
$T_{SD}^{(3)}$	Thermal Shutdown			155		$^{\circ}C$
$T_{SD\_HYS}^{(3)}$	Hysteresis			30		$^{\circ}C$

**Note3:** Guaranteed by design

## Application Circuits

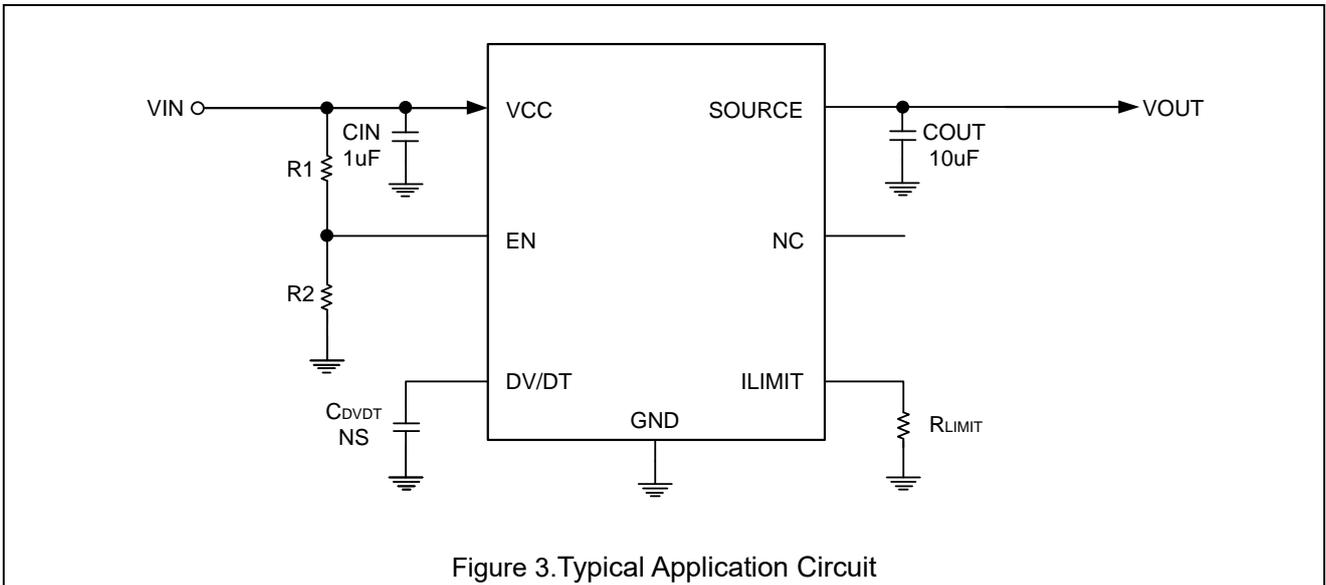


- \*: This electric circuit only supplies for reference.
- \*:  $C_{DVDT}$  is the capacitance position of the DVDT terminal to GND, used to adjust the Soft start time.
- \*:  $R_{LIMIT}$  is the resistance position of the ILIMIT terminal to GND, used to adjust the current limit.
- \*: The R1/R2 resistor is used for EN enable control, and a suitable resistance value needs to be configured to ensure that VEN is greater than  $V_{EN\_RISING}$  under  $V_{IN\_MIN}$ , or EN uses the GPIO control.

# ET20171

## Package Dimension

DFN10-3×3

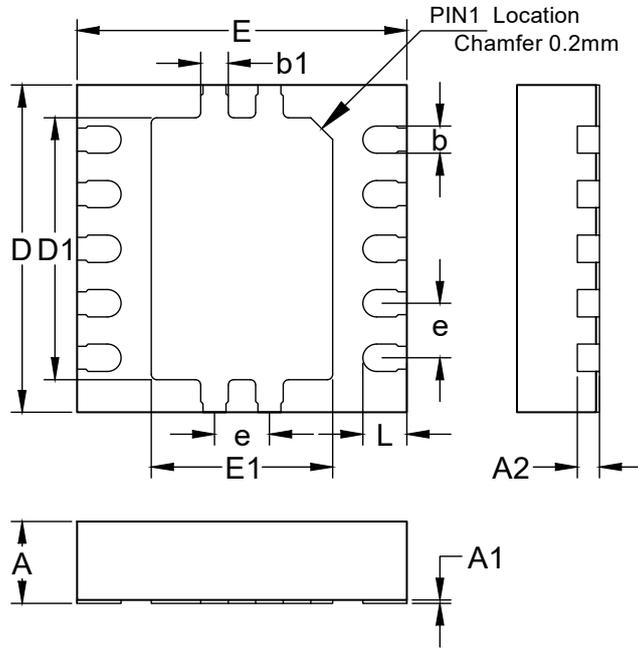


COMMON DIMENSIONS  
(Unit: mm)


SYMBOL	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	-	0.05
A2	0.20 REF		
b	0.20	0.25	0.35
b1	0.20	0.25	0.30
D	2.95	3.00	3.05
E	2.95	3.00	3.05
D1	2.25	2.40	2.50
E1	1.50	1.65	1.75
e	0.50 BSC		
L	0.30	0.40	0.50

# ET20171

## Marking

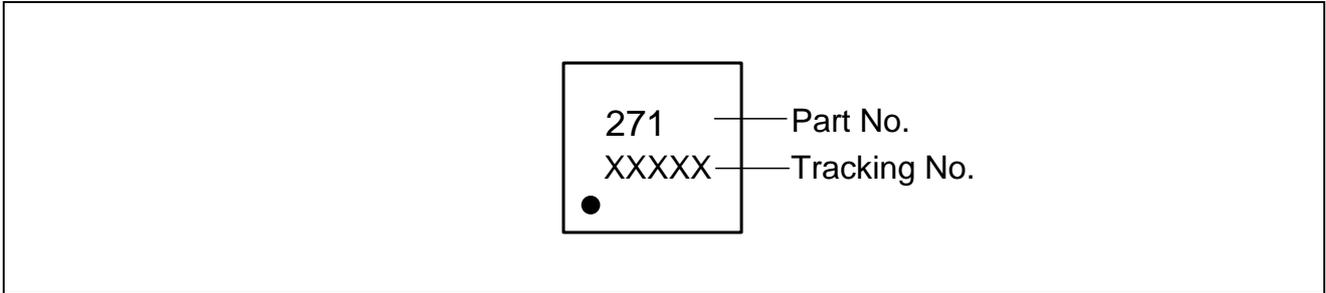

## Tape Information

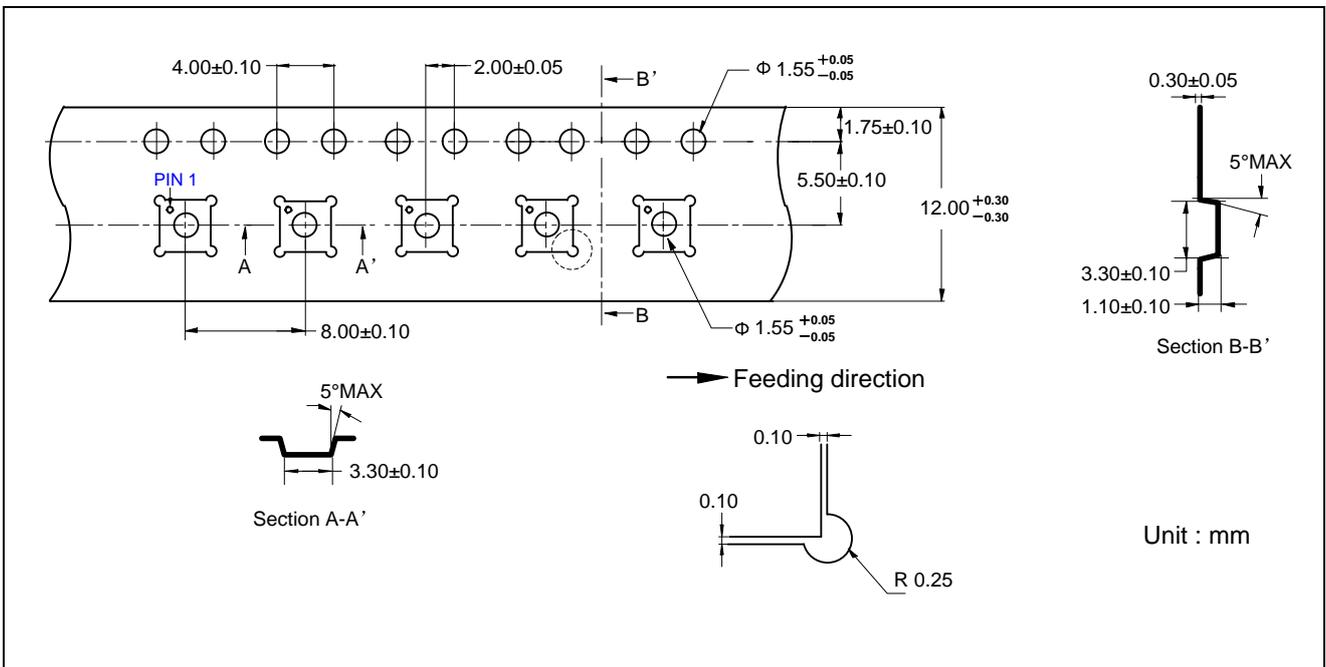

## Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2025-02-14	Officially Version	Zoucmm	Xuw	Liujiy
1.0.a	2026-01-20	Fix some word and picture	Zoucmm	Xuw	Shib