

High-Current Over-voltage Protectors

with Adjustable OVLO

General Description

The ET9932 is an advanced 5A unidirectional power switch for USB PD. It includes under voltage lockout, over voltage lockout, reverse current protection and over-temperature protection circuits. It is designed to automatically isolate the power switch terminals when a fault condition occurs. Both VBUS and VINT pins have 29V tolerance in shutdown mode. Two ET9932 chips can be used in parallel to support dual power inputs connecting to the same charging circuit. The device has a default 22.7V over voltage protection threshold, and the OVP threshold can be adjusted by using an external resistor divider on OVLO pin. A 20ms De-bounce time is deployed every time before the device is switched ON, followed by a soft start to limit the inrush current. Designed for operation from 2.9V to 29V, it is used in USB PD power control applications to offer essential protection and enhance system reliability. ET9932 is offered in a small WLCSP15 (2.530mm ×1.510mm ×0.555mm) package.

Features

- Wide Voltage Operation: 2.9V to 20V
- I_{SW} Maximum 5 A Continuous Current
- 29V Tolerance on Both V_{BUS} and V_{INT} Pin
- Ultra Low on-Resistance: 27mΩ (TYP)
- Adjustable V_{BUS} Over Voltage Protection
- Built in Slew Rate Control for Inrush Current Limit
- All Time Two Level Reverse-Current Protection
- Protection Circuitry
 - Over-Temperature Protection
 - Over-Voltage Protection
 - Under-Voltage Lockout
 - Reverse Current Protection
- Surge protection
 - IEC61000-4-5 exceeds ±100V on VBUS Pin
- ESD protection
 - IEC61000-4-2 Contact Discharge exceeds 8kV on VBUS Pin
 - HBM ESDA/JEDEC JS-001-2023 Class 2 exceeds ±2KV
 - CDM ESDA/JEDEC JS-002-2022 exceeds ±500V
- Specified from -40°C to +85°C
- Package Information


Part No.	Package	MSL
ET9932	WLCSP15 (2.53mm × 1.51mm)	Level 1

ET9932

Application

- Smart and Feature Phones
- Tablets, E-Books
- Notebooks

Pin Configuration

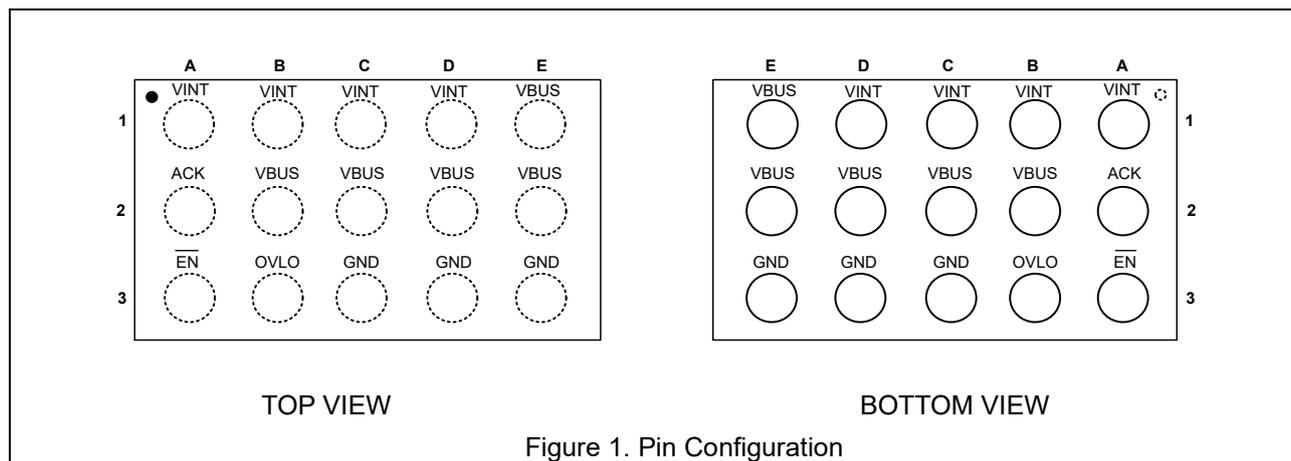

Pin Function

Pin	Name	I/O	Description
B2,C2,D2,E1,E2	VBUS	I	VBUS (Power Input)
A1,B1,C1,D1	VINT	O	VINT (Power Output)
B3	OVLO	I	V_{OVLO} Threshold Input
A2	ACK	O	Power Good Acknowledge (Open-drain Output)
C3,D3,E3	GND	O	Ground(0V)
A3	\overline{EN}	I	Enable Input (Active Low)


Function Table

Table1:Function Table of Switch 1

\overline{EN}	V_{BUS}	V_{INT}	ACK	Operation mode
L	$<V_{UVLO}$	X	Z	UVLO; Switch Open
L	$2.9V < V_{BUS} < V_{OVLO}$	X	L	Enable; Switch Closed
L	X	X	Z	OTP; Switch Open
L	$>V_{OVLO}$	X	Z	OVLO; Switch Open
H	X	X	Z	Disable; Switch Open
X	X	$V_{INT} > V_{BUS}$	Z	RCP; Switch Open

ET9932

Block Diagram

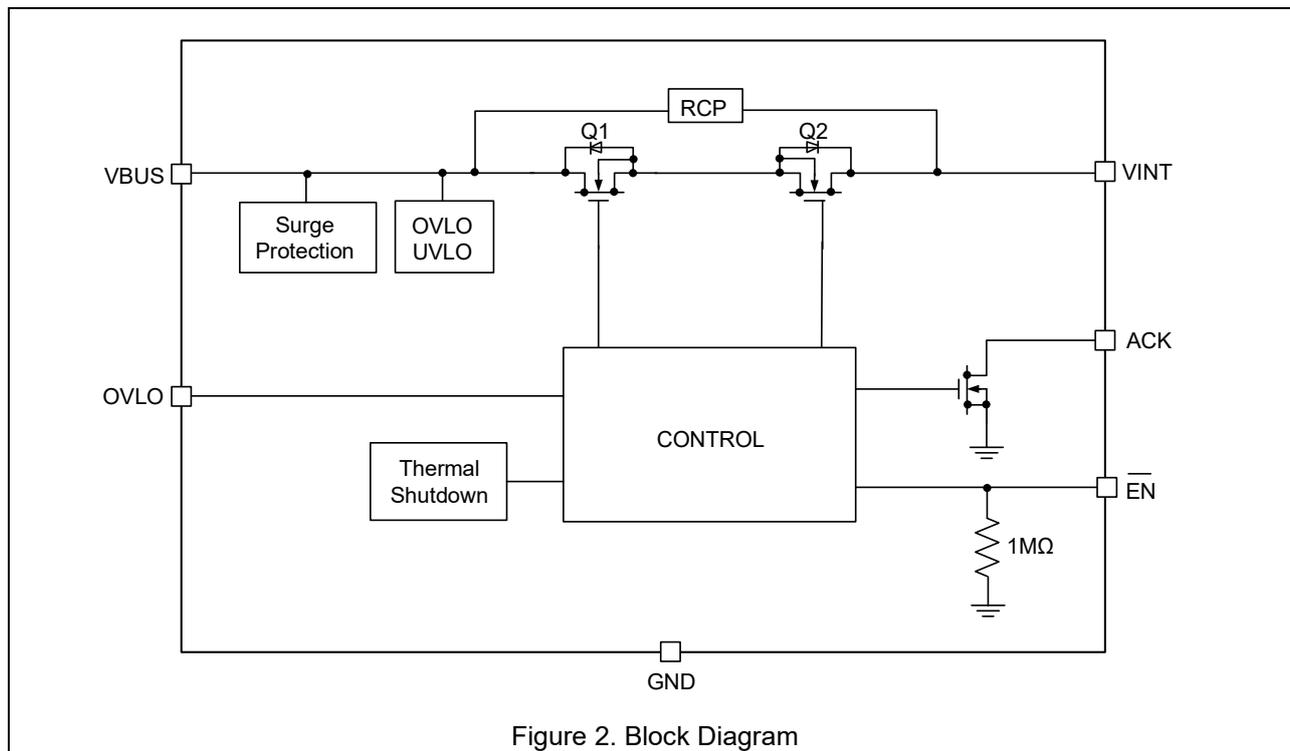

Functional Description

$\overline{\text{EN}}$ Input

A high on $\overline{\text{EN}}$ disables the channel MOSFET and all protection circuits, putting the device into Low power mode. A Low on $\overline{\text{EN}}$ enables the protection circuits and the MOSFET. There is an internal 1MΩ pull-down resistor on the $\overline{\text{EN}}$ pin to ensure the power switch conduction in a dead-battery situation. A 20ms Debounce time has been deployed before device turn-on. $\overline{\text{EN}}$ pin has 29V tolerance.

UVLO

When $\overline{\text{EN}}$ is low and $V_{\text{BUS}} < V_{\text{UVLO}}$, the Under-Voltage Lock-Out (UVLO) circuits disable the power MOSFET. Once V_{BUS} exceeds V_{UVLO} and no other protection circuit is active, the channel MOSFET state is controlled by the $\overline{\text{EN}}$ pin.

OVLO

When $\overline{\text{EN}}$ is low and $V_{\text{BUS}} > V_{\text{OVLO}}$, the Over-Voltage Lock-Out (OVLO) circuit disables the power MOSFET. Once V_{BUS} drops below V_{OVLO} and no other protection circuit is active, the power MOSFET resumes operation. OVLO pin is used to set the over-voltage threshold. The default over-voltage threshold is 22.7V when OVLO pin shorts to GND. Connecting a resistor divider to the OVLO pin adjusts the over voltage threshold from 4V to 24V using [Equation 1](#):

$$V_{\text{IN_OVLO}} = V_{\text{OVLO_TH}} \times (1 + R1/R2) \quad (1)$$

When the voltage on OVLO pin is below 0.1V, the device defaults to the 22.7V OVP threshold.

ET9932

OTP

When $\overline{\text{EN}}$ is Low and the device temperature exceeds 150°C the Over-Temperature Protection (OTP) circuit disables the power MOSFET and sets the ACK output Hi-Z. Once the device temperature decreases below 130°C and no other protection circuit is active, the state of the N-channel MOSFET is controlled by the $\overline{\text{EN}}$ pin again.

ACK Output

The ACK output is an open-drain output that requires an external pull-up resistor. The ACK pin indicates the state of the power switch. When no fault is detected and power switch is conducting, ACK goes output low, otherwise it stays at high impedance. The pull up resistor value is recommend to be 10KΩ to 200KΩ.

RCP

ET9932 has all time reverse current protection regardless of the $\overline{\text{EN}}$ logic level. Once the voltage on VINT is higher than VBUS for 45mV, the RCP circuit is triggered after a 3.7ms De-Glitch time. If the voltage gap is greater than 120mV, RCP triggers immediately to switch off the power MOSFET.

During the start up De-Glitch time, if the device detects the VINT voltage is higher than VBUS by 45mV, the power MOSFET does not turn on.

The RCP circuit helps by providing the capability of parallel connection of two USB charging ports to a single charger input, without backward leakage.

ET9932

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameters	Condition	Min	Max	Unit
V _I	Input Voltage	VBUS	-0.5	+29	V
		VINT	-0.5	+29	V
		OVLO	-0.5	V _{BUS}	V
		EN	-0.5	+29	V
V _O	Output Voltage	ACK	-0.5	+6	V
I _{SW}	Continuous Switch Current	T _A =25°C	-	5	A
	Peak Switch Current	10ms	-	10	A
T _{STG}	Storage Temperature		-65	+150	°C
P _D	Total Power Dissipation	T _A =25°C	-	1.78	W
R _{θJA}	Thermal Resistance, Junction-to-Air ⁽¹⁾	T _A =25°C		56	°C/W
V _{ESD}	Electrostatic Discharge Voltage	IEC 61000-4-2 Contact Discharge; VBUS	-8	+8	KV
		IEC 61000-4-2 Air Discharge; VBUS	-15	+15	KV
		HBM (JEDEC JS-001-2023); All pins	-2	+2	KV
		CDM (JEDEC JS -002-2022); All pins	-500	+500	V
Surge	Surge Protection	IEC 61000-4-5, VBUS (No DC)	-100	+100	V

Note1: The R_{θJA1} is dependent on the PCB heat dissipation. Board used to drive this data was a 2Layer 60mm×42mm 1oz JEDEC PCB standard;

ET9932

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. ETEK does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameters	Condition	Min	Max	Unit
V _I	Input Voltage	V _{BUS}	2.9	20	V
		V _{INT}	2.9	20	V
		EN	0	20	V
V _O	Output Voltage	ACK	0	5.5	V
T _J	Junction Temperature		-40	+125	°C
T _A	Ambient Temperature		-40	+85	°C

Electrical Characteristics

Unless otherwise noted, V_{BUS}=2.9V to 20V, T_A=-40°C to 85°C, Typical values are at V_{IN}=5V, I_{IN}≤2A, C_{IN}=1μF and T_A=25°C.

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
TVS Characteristics						
V _{BR}	Reverse Breakdown Voltage	I _T =10mA, T _A =25°C	29	32	36	V
V _{BUS}	Input Voltage		2.9		29	V
I _Q	V _{BUS} Quiescent Current	V _{BUS} =5V, V _{EN} =0V, I _O =0A		90	150	μA
		V _{BUS} =20V, V _{EN} =0V, I _O =0A		105	170	μA
		V _{BUS} =5V, V _{EN} =5V, I _O =0A		3	10	μA
		V _{BUS} =20V, V _{EN} =5V, I _O =0A		15	30	μA
I _{S_OFF}	V _{BUS} Off-state Leakage Current	V _{BUS} =5V, V _{EN} =5V, V _{INT} =0V		3	10	μA
		V _{BUS} =20V, V _{EN} =5V, V _{INT} =0V		15	30	μA
	V _{INT} Off-state Leakage Current	V _{BUS} =0V, V _{EN} =5V, V _{INT} =5V		0.1	5	μA
		V _{BUS} =0V, V _{EN} =5V, V _{INT} =20V		2	16	μA
R _{ON}	On-Resistance of Switch IN-OUT	V _{BUS} =5.0V, I _{OUT} =1A, T _A =25°C		27	43	mΩ
		V _{BUS} =20V, I _{OUT} =1A, T _A =25°C		27	43	
V _{OVLO}	Default Over Voltage Lockout Voltage	V _{BUS} Rising; V _{EN} = 0V; OVLO short to GND	22.0	22.7	24.0	V
		V _{BUS} Falling; V _{EN} = 0V; OVLO short to GND	20.7	22.2	23.5	V
	Hysteresis of Over Voltage Lockout Voltage		0.5		v	
	Adjust Range		4		24	V

ET9932

Electrical Characteristics(Continued)

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
V _{OVLO_TH}	OVLO Set Threshold		1.18	1.21	1.24	V
V _{OVLO_ST}	External OVLO Select Threshold			0.1		V
V _{UVLO}	Under Voltage Protect	V _{BUS} Rising	2.0	2.45	2.85	V
		V _{BUS} Falling	1.9	2.35	2.75	V
	Hysteresis of Under Voltage Protect			0.1		V
I _{OVLO}	OVLO Input Leakage Current	V _{OVLO} = V _{OVLO_TH}	-100		100	nA
V _{IH}	\overline{EN} Input Logic High Voltage	V _{BUS} = 2.9V to 20V	1.2		20	V
V _{IL}	\overline{EN} Input Logic Low Voltage	V _{BUS} = 2.9V to 20V	0		0.4	V
V _{TRIG}	RCP trigger voltage	V _{TRIG} = V _{INT} - V _{BUS}	10	45	80	mV
V _{TRIG_H}	RCP High Trigger Voltage ⁽²⁾	V _{TRIG} = V _{INT} - V _{BUS}		120		mV
T _{SHDN}	Thermal Shutdown ⁽²⁾			150		°C
T _{SHDN_HYS}	Thermal-Shutdown Hysteresis ⁽²⁾			20		°C
Dynamic Characteristics: see figure						
t _{ACK}	ACK response time	From \overline{EN} to V _{ACK} goes output low C _{LOAD} =100uF; R _{LOAD} =100Ω	10	15	20	ms
t _{DEB}	Debounce Time	Time from V _{UVLO} <V _{BUS} <V _{OVLO} to V _{OUT} =10% of V _{BUS} ; C _{LOAD} =100uF; R _{LOAD} =100Ω	10	20	25	ms
t _{EN}	Enable Time	From \overline{EN} to V _{INT} = 10% V _{BUS} ; V _{BUS} = 5V & 20V; C _{LOAD} =100uF; R _{LOAD} =100Ω	10	20	25	ms
t _{TLH}	V _{INT} Rise Time	V _{BUS} = 5V & 20V; C _{LOAD} =100uF; R _{LOAD} =100Ω	1	5	10	ms
t _{DIS(OVP)}	Switch Turn-off Response Time ⁽²⁾	From V _{BUS} >V _{OVLO} to V _{INT} stop rising; R _{LOAD} =100Ω, C _{LOAD} =NL; V _{BUS} = 20V; OVLO pin short to GND		120		ns
t _{DEGL}	RCP De-glitch Time	From V _{INT} >V _{BUS} +45mV to Switch Off	2.6	3.7	4.8	ms
t _{DIS(RCP)}	RCP Turn Off Time ⁽²⁾	From V _{INT} >V _{BUS} +120mV to Switch Off		2	10	μs


ET9932

Electrical Characteristics(Continued)


t_{ON}	Turn-on Time	\overline{EN} to $V_{INT} = 90\% V_{BUS}$; $V_{BUS} = 5V \text{ \& } 20V$; $C_{LOAD}=100\mu F$; $R_{LOAD}=100\Omega$	25	35	ms
t_{OFF}	Turn-off Time	\overline{EN} to $V_{INT} = 10\% V_{BUS}$; $V_{BUS} = 5V \text{ \& } 20V$; $C_{LOAD}=100\mu F$; $R_{LOAD}=100\Omega$	23	33	ms

Note2:This parameter is guaranteed by design and characterization.

Timing Waveform

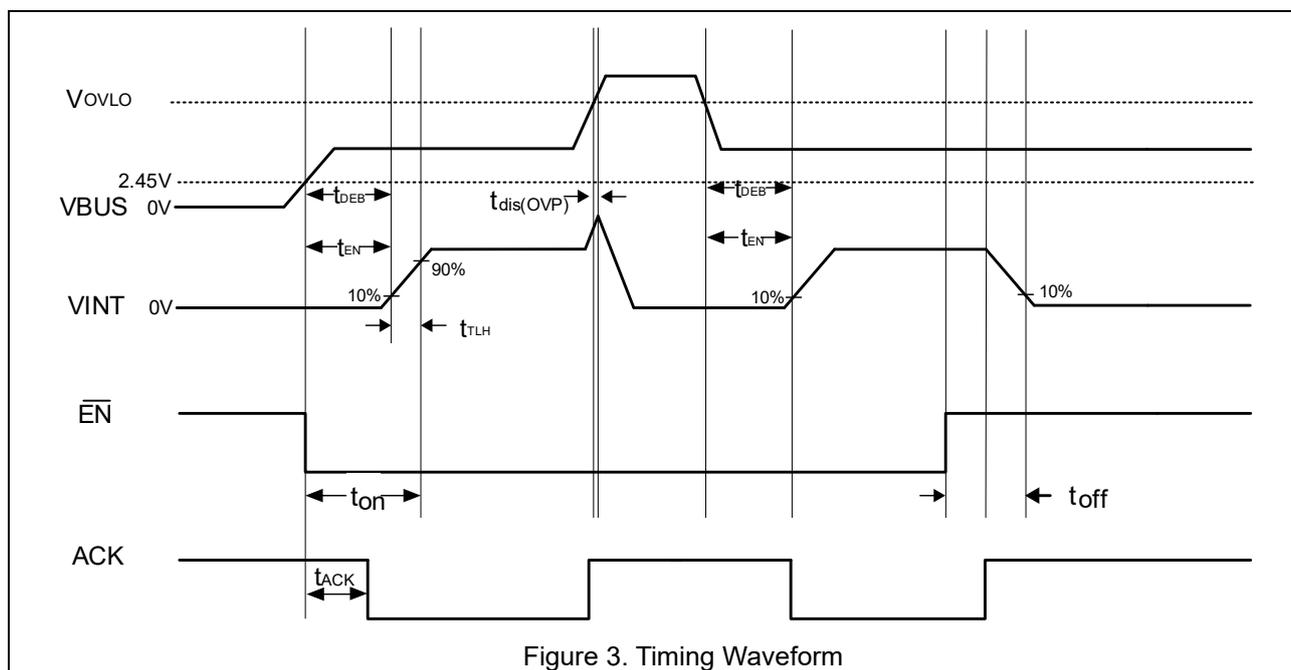


Application Circuits

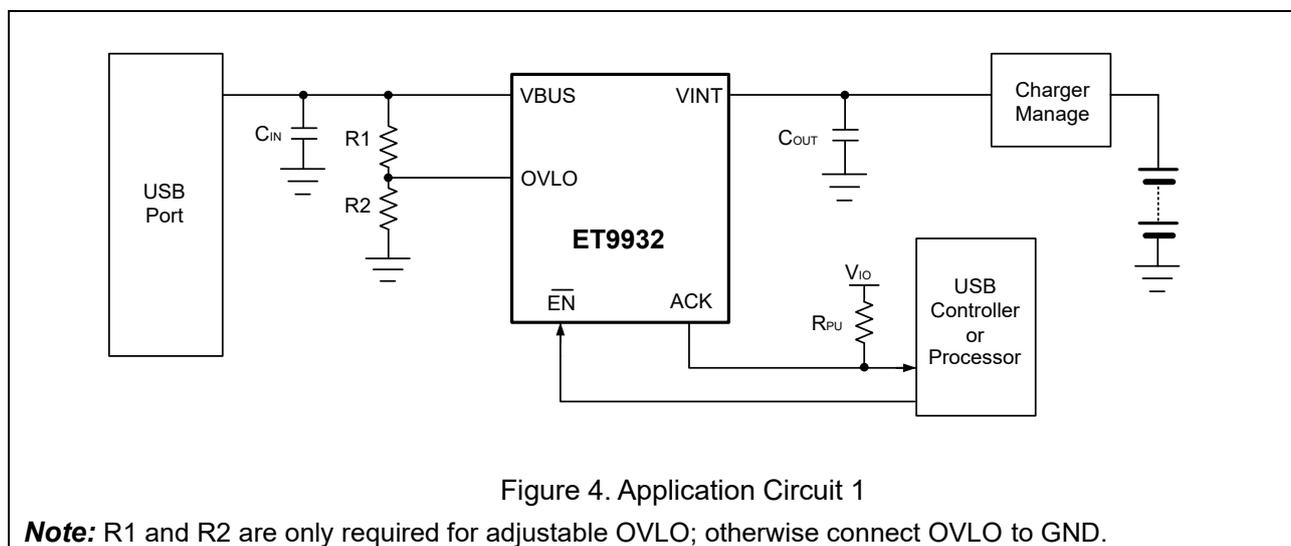

ET9932


Application Circuits(Continued)

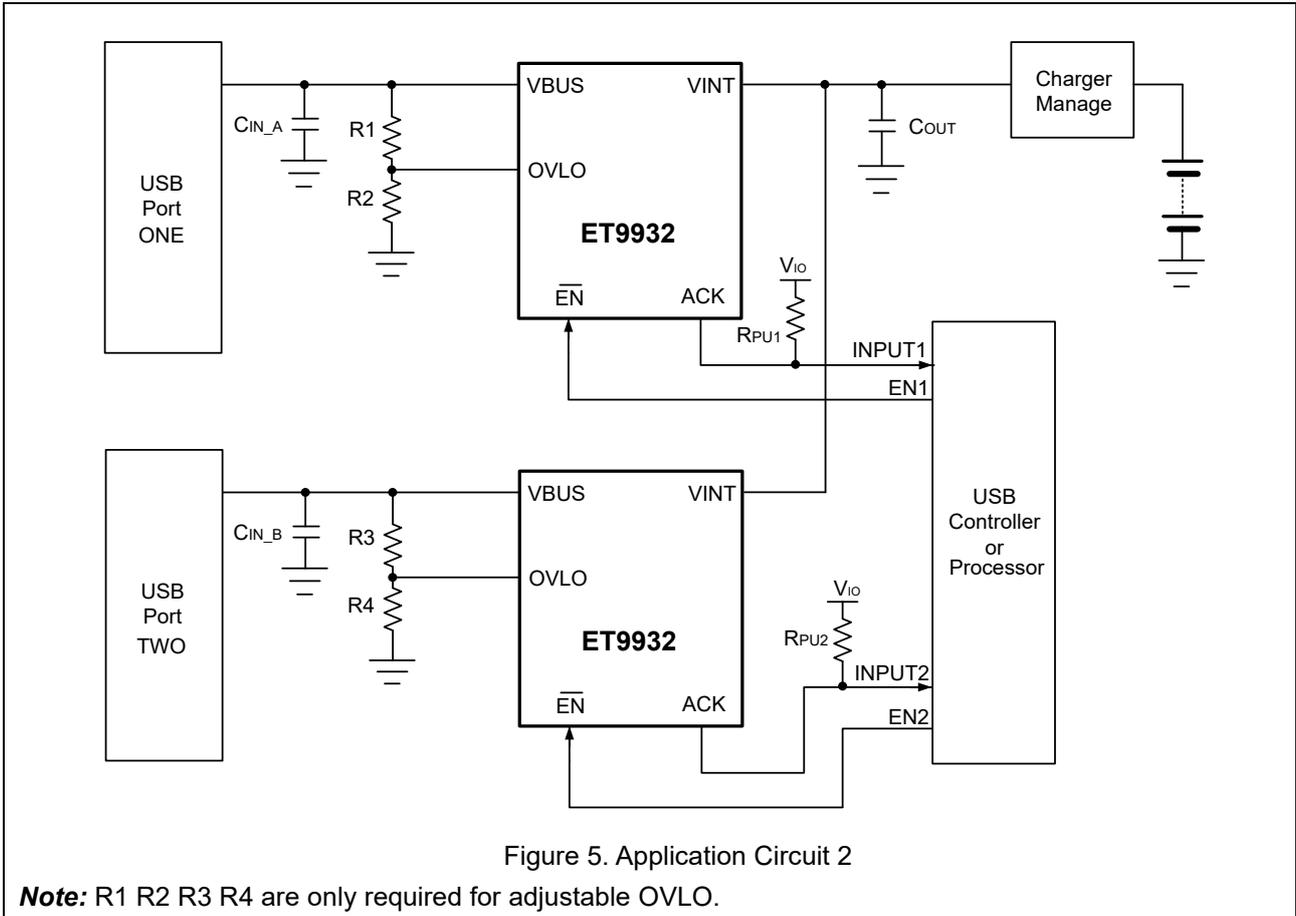

ET9932

Package Dimension

WLCSP15

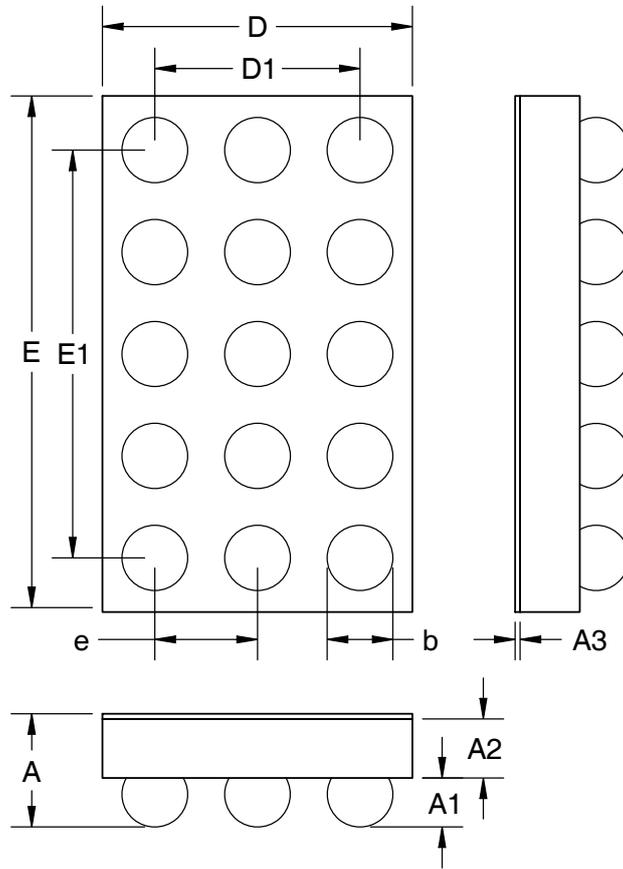


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.502	0.555	0.608
A1	0.215	0.240	0.265
A2	0.265	0.290	0.315
A3	0.022	0.025	0.028
D	1.480	1.510	1.540
D1	1.000BSC		
E	2.500	2.530	2.560
E1	2.000BSC		
b	0.295	0.320	0.345
e	0.500BSC		


Unit: mm

ET9932


Tape Information

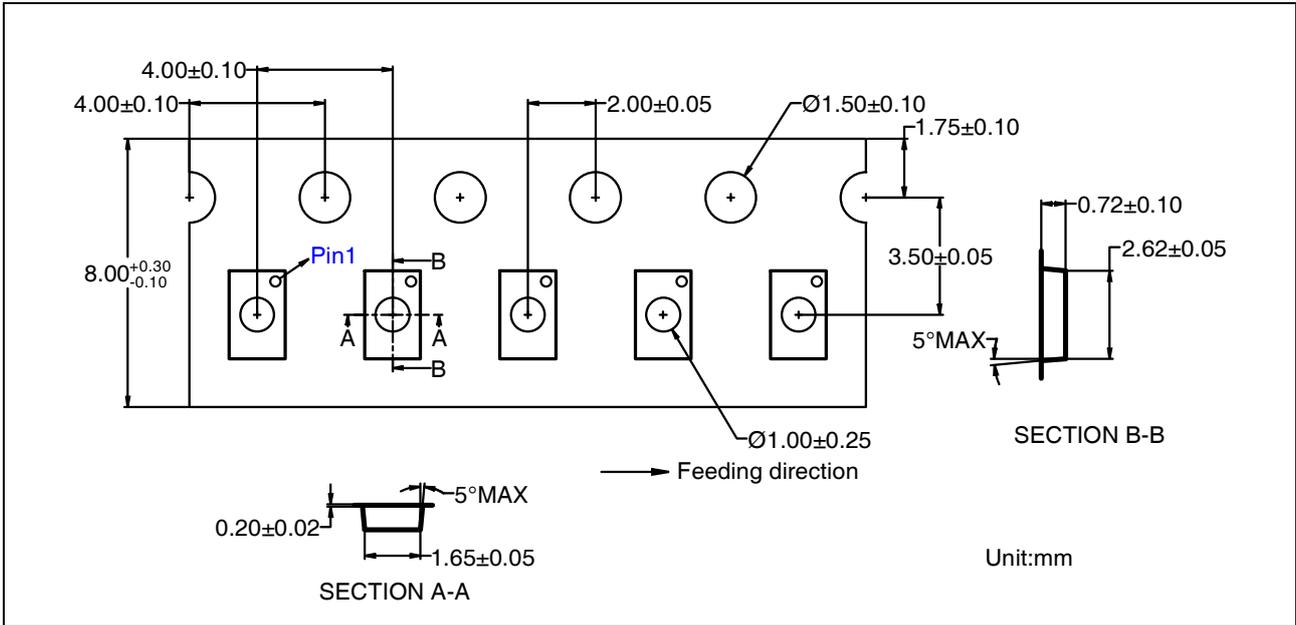

Reel Information

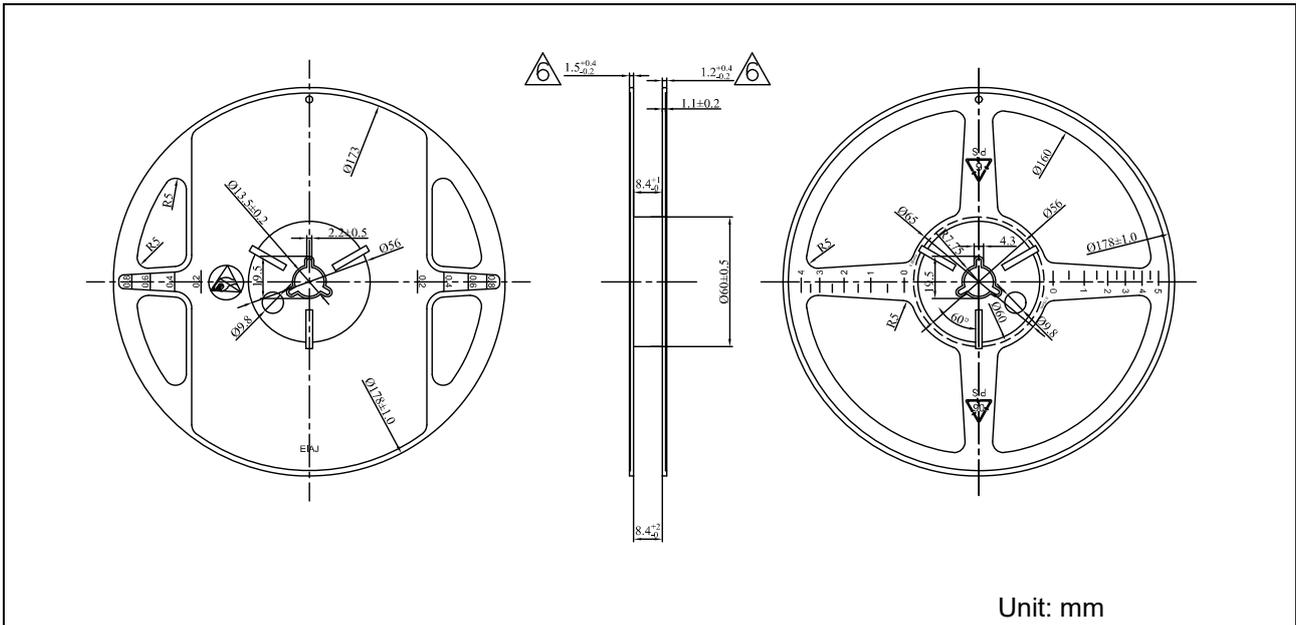

Marking

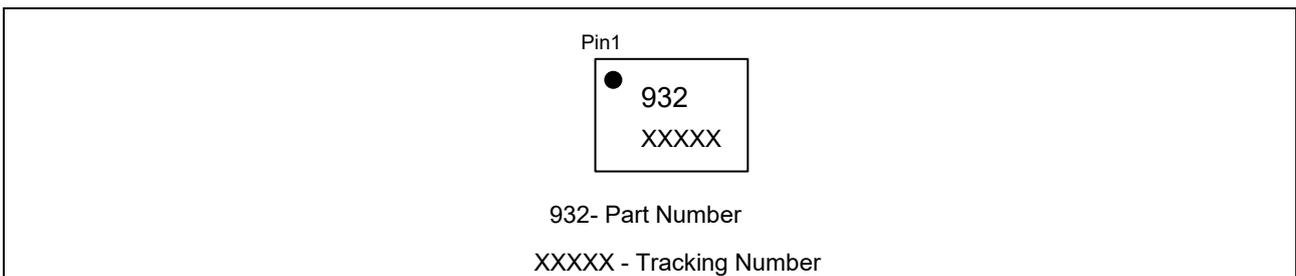

ET9932

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2025-08-25	Initial Version	Caojc	Guoy	Liujiy