

## Single 2-Input AND Gate

### General Description

The ET74LV1T08 is a single 2-input AND Gate operating from a 1.6V to 5.5V supply. This device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive.

### Features

- Designed for 1.6V to 5.5V V<sub>CC</sub> Operation
- Over-Voltage Tolerant Inputs Accept Voltages to 5.5V
- ±8mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- These Devices are Pb-Free and RoHS Compliant
- ESD Protection Complies with JESD22 Standard
  - HBM: ±4000V Pass (JEDEC JS-001)
  - CDM: ±1000V Pass (JEDEC JS-002)
- Latch-up Performance Exceeds ±100mA per JEDEC JESD78F
- Device Information Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET74LV1T08	SC70-5 (1.3mm × 2.1mm)	Tape and Reel, 3K/Reel	3
ET74LV1T08T	SOT23-5 (1.6mm × 2.9mm)	Tape and Reel, 3K/Reel	3

### Pin Configuration

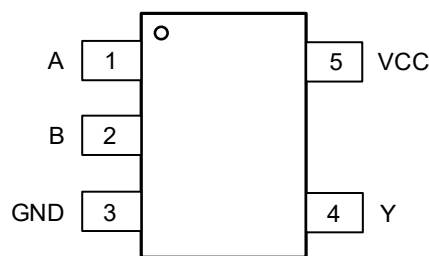


Figure1. Pin Configuration


# ET74LV1T08

## Pin Function

SC70-5/ SOT23-5

Pin No.	Pin Name	Function
1	A	Input A
2	B	Input B
3	GND	Ground
4	Y	Output
5	VCC	Supply Voltage

## Block Diagram

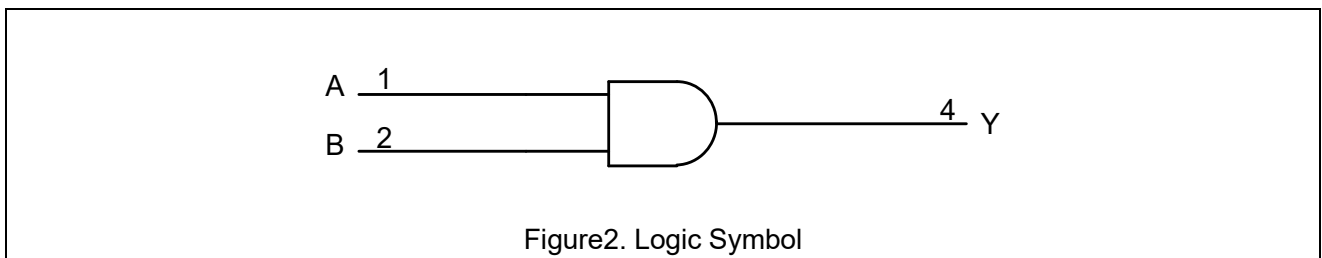

## Function Table

Input		Output
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

# ET74LV1T08

## Absolute Maximum Ratings

Symbol	Parameter	Value	Unit	
V <sub>CC</sub>	DC Supply Voltage (VCC Pin)	-0.5 to 7.0	V	
V <sub>I</sub>	DC Input Voltage <sup>(1)</sup>	-0.5 ≤ V <sub>I</sub> ≤ 7.0	V	
V <sub>O</sub>	DC Output Voltage Output in Higher or Low State	-0.5 to V <sub>CC</sub> + 0.5	V	
I <sub>IK</sub>	DC Input Diode Current, V <sub>I</sub> < GND	-50	mA	
I <sub>OK</sub>	DC Output Diode Current, V <sub>O</sub> < GND, V <sub>O</sub> > V <sub>CC</sub>	±50	mA	
I <sub>O</sub>	DC Output Sink Current	±50	mA	
I <sub>CC</sub>	DC Supply Current per Supply Pin	100	mA	
I <sub>GND</sub>	DC Ground Current per Supply Pin	-100	mA	
T <sub>STG</sub>	Storage Temperature Range	-65 to 150	°C	
T <sub>L</sub>	Lead Temperature, Soldering 10 Seconds	260	°C	
T <sub>J</sub>	Max Junction Temperature	150	°C	
V <sub>ESD</sub>	ESD Classification	Human Body Model <sup>(2)</sup>	±4000	V
		Charged Device Model <sup>(3)</sup>	±1000	
I <sub>LU</sub>	Max Latch up Current Above V <sub>CC</sub> and GND at 125°C <sup>(4)</sup>	±100	mA	

Stresses exceeding those listed in this table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

**Note1:** I<sub>O</sub> absolute maximum rating must be observed.

**Note2:** HBM tested per JEDEC JS-001;

**Note3:** CDM tested per JEDEC JS-002;

**Note4:** Latch up Current Maximum Rating tested per JEDEC JESD78F.

## Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R <sub>θJA</sub>	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	300	°C/W
	SOT23-5		250	
R <sub>θJB</sub>	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-board	75	mW
	SOT23-5		65	
P <sub>D</sub>	SC70-5	Power Dissipation in Still Air at 85°C	215	
	SOT23-5		260	

## Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V <sub>CC</sub>	DC Supply Voltage Operating (VCC Pin)	1.6	5.5	V
V <sub>I</sub>	DC Input Voltage	0	V <sub>CC</sub>	V
V <sub>O</sub>	DC Output Voltage (High or Low State)	0	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Temperature Range	-40	125	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time	V <sub>CC</sub> = 1.8V to 5.5V		ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

# ET74LV1T08

## Electrical Characteristics

### DC Electrical Characteristics

Symbol	Parameter	Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = 25°C			-40°C ≤ T <sub>A</sub> ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V <sub>IH</sub>	High-level Input Voltage		1.65~1.8	0.94			1.0		V
			2.0	0.99			1.03		
			2.25~2.5	1.135			1.18		
			2.75	1.21			1.23		
			3.0~3.3	1.35			1.37		
			3.6	1.47			1.48		
			4.5~5.0	2.02			2.03		
	5.5	2.10			2.11				
V <sub>IL</sub>	Low-level Input Voltage		1.65~2.0			0.45		0.40	V
			2.25~2.75			0.75		0.71	
			3.0~3.6			0.80		0.65	
			4.5~5.5			0.80		0.80	
V <sub>OH</sub>	High-level Output Voltage	I <sub>OH</sub> = -20μA	1.65~5.5	V <sub>CC</sub> - 0.1	V <sub>CC</sub>		V <sub>CC</sub> - 0.1		V
		I <sub>OH</sub> = -2mA	1.65	1.28			1.21		
		I <sub>OH</sub> = -2mA	1.8	1.5			1.45		
		I <sub>OH</sub> = -2.3mA	2.3	2.0			2.0		
		I <sub>OH</sub> = -3mA	2.3	2.0			1.93		
		I <sub>OH</sub> = -3mA	2.5	2.25			2.15		
		I <sub>OH</sub> = -3mA	3.0	2.78			2.7		
		I <sub>OH</sub> = -5.5mA	3.0	2.6			2.49		
		I <sub>OH</sub> = -5.5mA	3.3	2.9			2.8		
		I <sub>OH</sub> = -4mA	4.5	4.2			4.1		
		I <sub>OH</sub> = -8mA	4.5	4.1			3.95		
		I <sub>OH</sub> = -8mA	5.5	4.6			4.5		
V <sub>OL</sub>	Low-level Output Voltage	I <sub>OL</sub> = 20μA	1.65~5.5			0.1		0.1	V
		I <sub>OL</sub> = 2mA	1.65			0.2		0.25	
		I <sub>OL</sub> = 2.3mA	2.3			0.1		0.15	
		I <sub>OL</sub> = 3mA	2.3			0.15		0.2	
		I <sub>OL</sub> = 3mA	3.0			0.1		0.15	
		I <sub>OL</sub> = 5.5mA	3.0			0.2		0.252	
		I <sub>OL</sub> = 4mA	4.5			0.15		0.2	
		I <sub>OL</sub> = 8mA	4.5			0.3		0.35	
I <sub>I</sub>	Input Leakage Current	V <sub>I</sub> = 5.5V or GND	0~5.5			±0.1		±1.0	μA

# ET74LV1T08

## DC Electrical Characteristics (Continued)

Symbol	Parameter	Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = 25°C			-40°C ≤ T <sub>A</sub> ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
I <sub>CC</sub>	Quiescent Supply Current	V <sub>I</sub> = 5.5 V or GND	5.5			1.0		10	μA
ΔI <sub>CC</sub>	Additional Supply Current	Per Input Pin; V <sub>I</sub> = 0.3V or 1.1V; I <sub>O</sub> = 0mA; Other Pins at V <sub>CC</sub> or GND	1.8			10		10	μA
		Per Input Pin; V <sub>I</sub> = 0.3V or 3.4V; I <sub>O</sub> = 0mA; Other Pins at V <sub>CC</sub> or GND	5.5			1.35		1.5	mA

## AC Electrical Characteristics

Symbol	Parameter	Condition	V <sub>CC</sub> (V)	T <sub>A</sub> = 25°C			-40°C ≤ T <sub>A</sub> ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay (Figure3 & 4)	C <sub>L</sub> = 15pF	1.8		13.3	16.5		18.5	ns
		C <sub>L</sub> = 30pF	1.8		14.2	17.7		18.7	
		C <sub>L</sub> = 15pF	2.5		8.4	10.4		12	
		C <sub>L</sub> = 30pF	2.5		9.1	11.3		13	
		C <sub>L</sub> = 15pF	3.3		6.7	8.3		9.4	
		C <sub>L</sub> = 30pF	3.3		7.3	8.9		10.2	
		C <sub>L</sub> = 15pF	5.0		5.6	6.5		7.3	
		C <sub>L</sub> = 30pF	5.0		6	7		7.9	

## Capacitance Characteristics

Symbol	Parameter	Condition	Typ	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>CC</sub> = 5.5V, V <sub>I</sub> = 0V or V <sub>CC</sub>	3.5	pF
C <sub>PD</sub>	Power Dissipation Capacitance <sup>(5)</sup>	10MHz, V <sub>CC</sub> = 3.3V, V <sub>I</sub> = 0V or V <sub>CC</sub>	26	pF
		10MHz, V <sub>CC</sub> = 5.5V, V <sub>I</sub> = 0V or V <sub>CC</sub>	30	

**Note5:** C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f<sub>i</sub> = input frequency in MHz;

f<sub>o</sub> = output frequency in MHz;

C<sub>L</sub> = output load capacitance in pF;


V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

Σ(C<sub>L</sub> × V<sub>CC</sub><sup>2</sup> × f<sub>o</sub>) = sum of outputs.

# ET74LV1T08

## AC Test Circuit

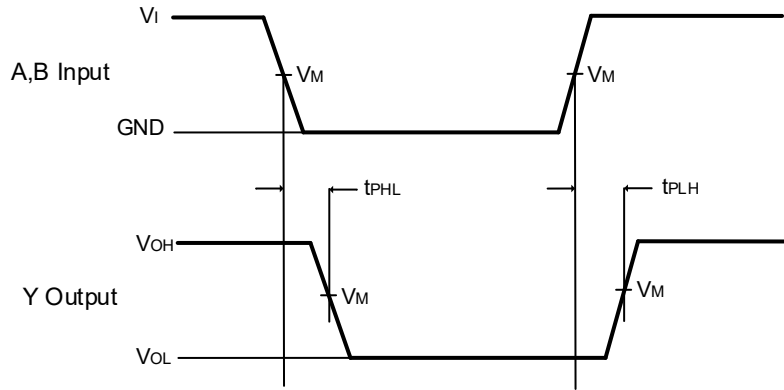

Measurement points are given in [Table 1](#).


$V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

Figure3. Input A, B and C to Output Y Propagation Delay Times

Table 1. Measurement Points

Input	Output
$V_M$	$V_M$
$0.5 \times V_i$	$0.5 \times V_{CC}$

# ET74LV1T08

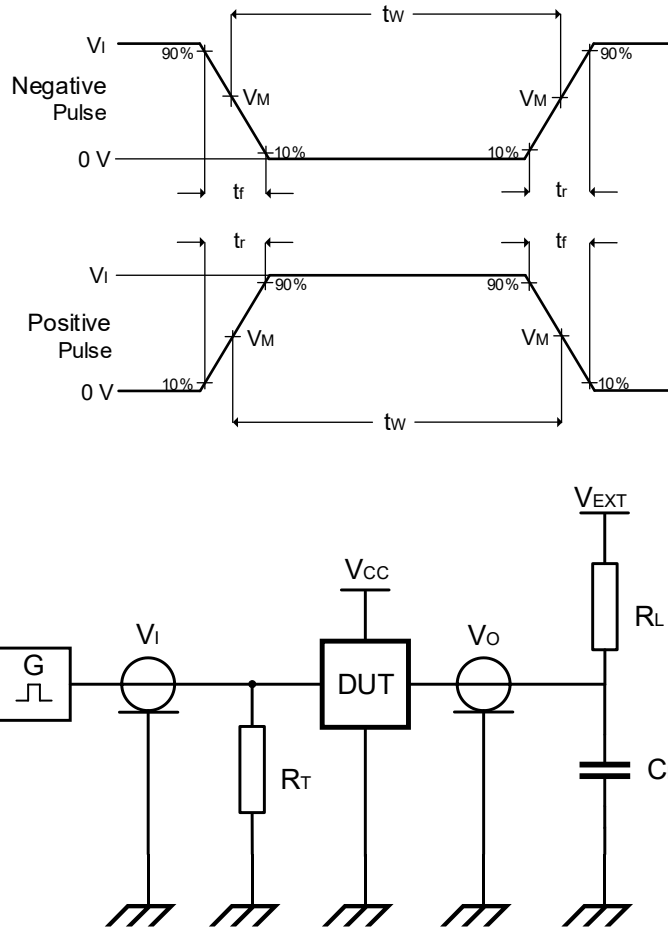

Measurement points are given in [Table 2](#).

Definitions test circuit:

$R_L$  = Load resistance;

$C_L$  = Load capacitance including jig and probe capacitance;

$R_T$  = Termination resistance should be equal to output impedance  $Z_O$  of the pulse generator;

$V_{EXT}$  = External voltage for measuring switching times.

Figure4. Test Circuit for Measuring Switching Times


Table 2. Test Data

Supply Voltage	Input			Load		$V_{EXT}$
$V_{CC}$	$V_I$	$t_r = t_f$	$f_{max}$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$
1.8V	$V_{CC}$	3ns	15MHz	15pF, 30pF	1M $\Omega$	Open
2.5V	$V_{CC}$	3ns	25MHz	15pF, 30pF	1M $\Omega$	Open
3.3V	3V	3ns	50MHz	15pF, 30pF	1M $\Omega$	Open
5.0V	3V	3ns	50MHz	15pF, 30pF	1M $\Omega$	Open

# ET74LV1T08

## Package Dimension

SC70-5 (1.3mm × 2.1mm)

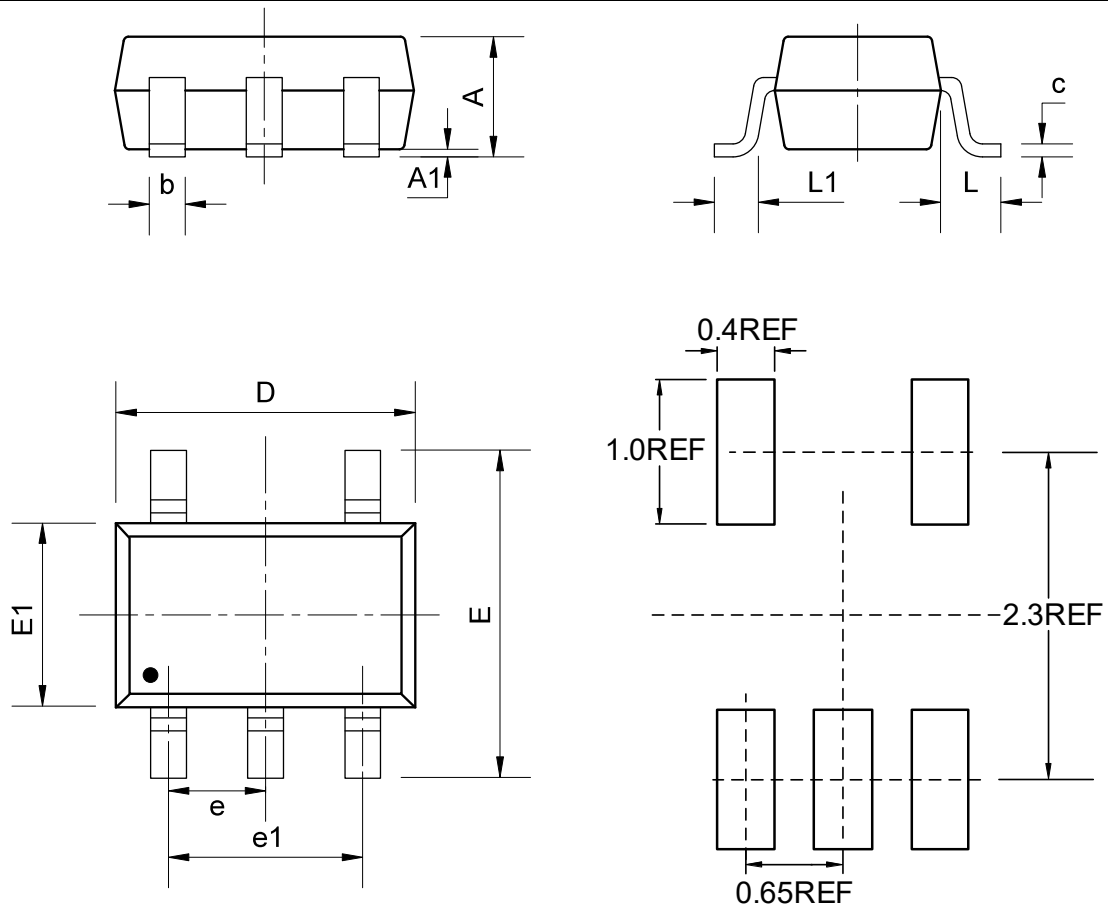


### COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.10
A1	0.00	-	0.15
b	0.15	-	0.35
c	0.08	-	0.20
D	2.00	2.10	2.30
e	0.65BSC		
e1	1.30BSC		
E	2.15	2.30	2.50
E1	1.15	1.30	1.45
L	0.50REF		
L1	0.33REF		

# ET74LV1T08

SOT23-5 (1.6mm × 2.9mm)

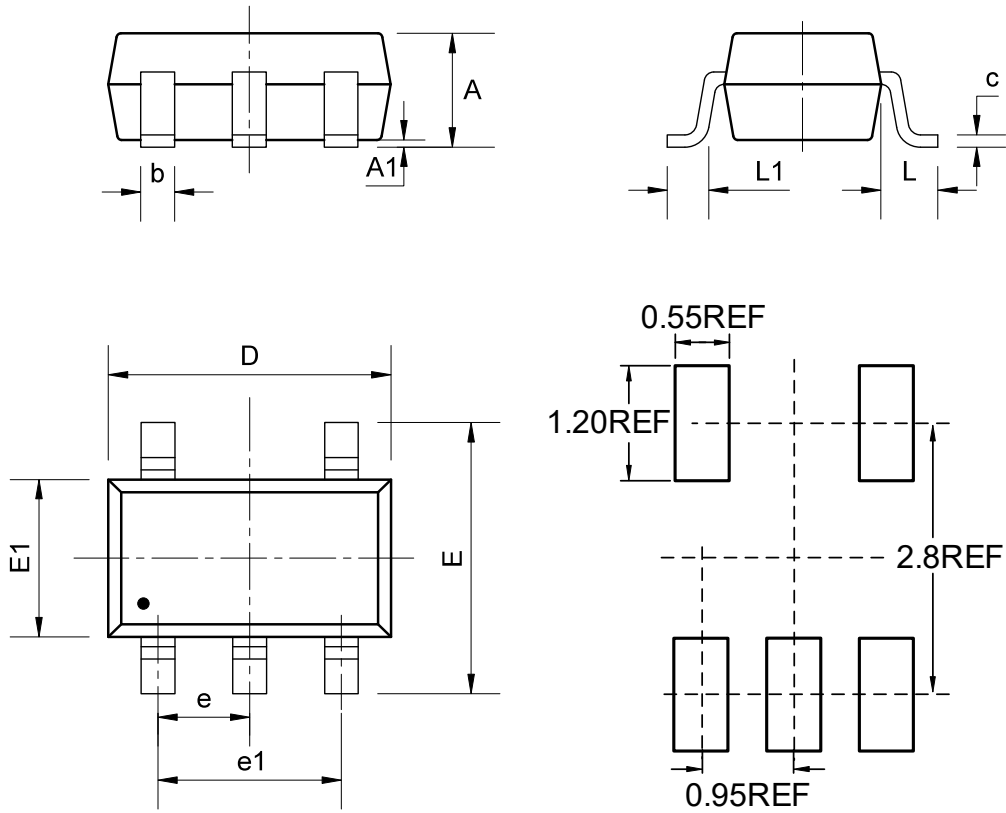

## COMMON DIMENSIONS


(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.45
A1	0.00	-	0.15
b	0.28	0.35	0.50
c	0.08	0.15	0.22
D	2.75	2.9	3.05
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
E	2.60	2.80	3.00
E1	1.45	1.6	1.75
L	0.60REF		
L1	0.30	0.45	0.60


# ET74LV1T08

## Tape Information


SC70-5 (1.3mm × 2.1mm)

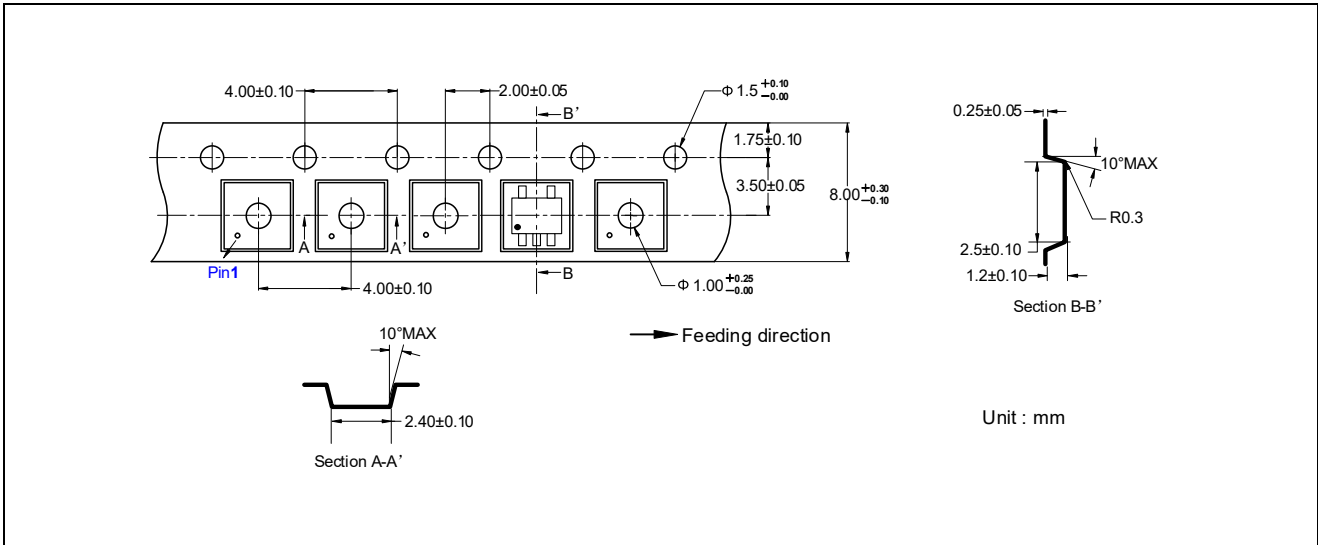

SOT23-5 (1.6mm × 2.9mm)

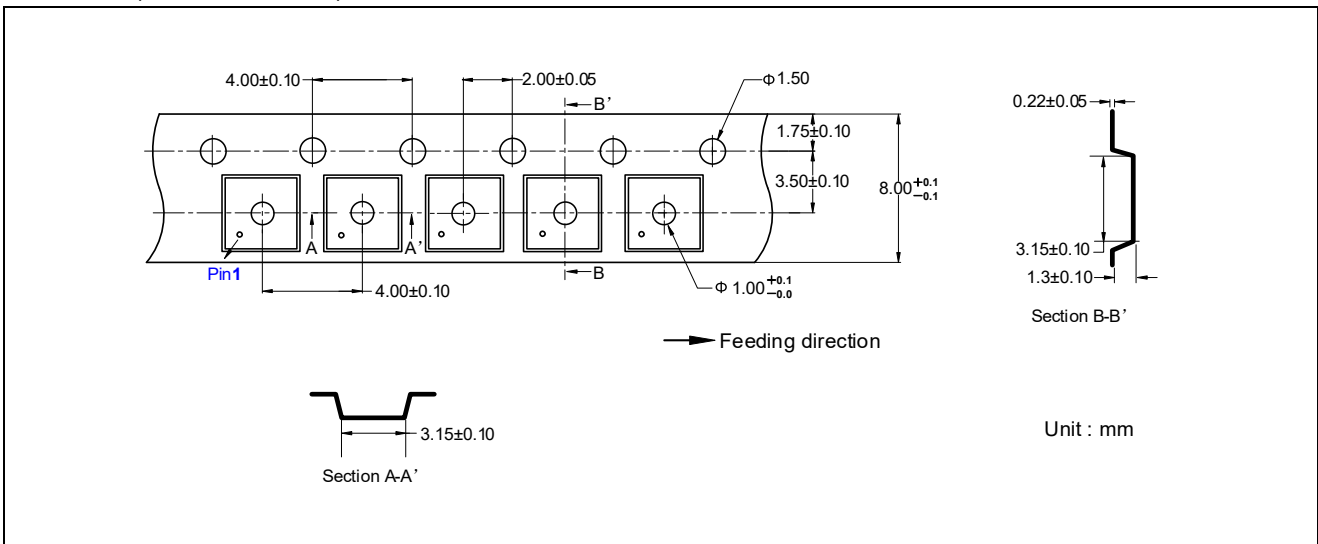

## Marking Information

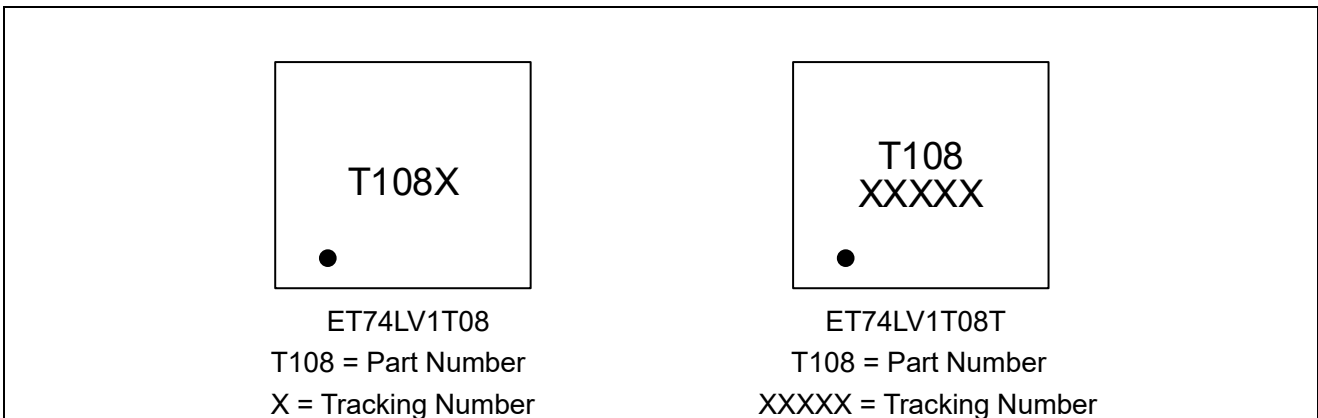

# ET74LV1T08

---

## Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2025-11-03	Official Version	Wang anran	Yang xiaoxu	Liu jiaoying