




ES05DUCFM

Transient Voltage Suppressor

Features

- Small Body Outline Dimensions:
0.039" x 0.024" (1.0 mm x 0.60 mm)
- Protects one I/O or power line
- Low Clamping Voltage
- Low Capacitance
- Working Voltage: 5 V
- Low Leakage Current
- Response Time is Typically < 1 ns

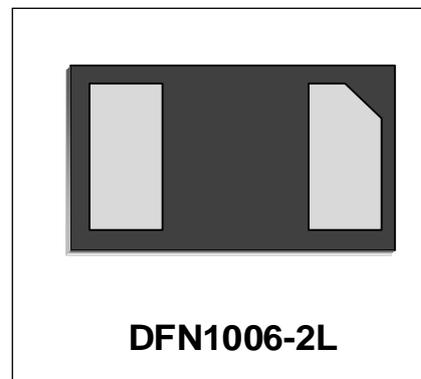

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 30\text{kV}$ (air), $\pm 30\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 8A (8/20 μs)


Mechanical Characteristics

- DFN1006-2L package
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS Compliant
- MSL1

Applications

- Laptop Computers
- Cellular Phones
- Digital Cameras
- Personal Digital Assistants (PDAs)

Schematic & PIN Configuration

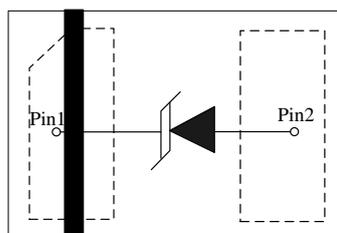


Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P _{PP}	120	Watts
Peak Pulse Current ($t_p = 8/20\mu s$)	I _{PP}	8	A
Operating Temperature	T _J	-55 to + 125	°C
Storage Temperature	T _{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I _{PP}	Reverse Peak Pulse Current
V _C	Clamping Voltage @ I _{PP}
V _{RWM}	Reverse Stand-Off Voltage
I _R	Reverse Leakage Current @ V _{RWM}
V _{BR}	Breakdown Voltage @ I _T
I _T	Test Current
I _F	Forward Current
V _F	Forward Voltage @ I _F

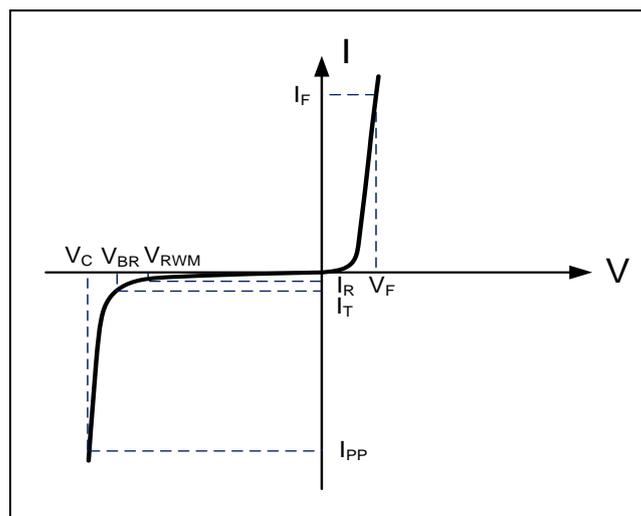

Electrical Characteristics

ES05DUCFM						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V _{RWM}				5	V
Reverse Breakdown Voltage	V _{BR}	I _T =1mA	6		10	V
Reverse Leakage Current	I _R	V _{RWM} =5V, T=25°C			500	nA
Forward Voltage	V _F	I _F =10mA	0.6		1.5	V
Clamping Voltage	V _C	I _{PP} =8A, t _p =8/20μs		11	15	V
ESD Clamping Voltage ¹	V _C	I _{PP} = 4A, t _p = 0.2/100ns (TLP)		9.8		V
ESD Clamping Voltage ¹	V _C	I _{PP} = 16A, t _p = 0.2/100ns (TLP)		15		V
Dynamic Resistance ^{1,2}	R _{DYN}	TLP=0.2/100ns		0.43		Ω
Junction Capacitance	C _j	V _R = 0V, f = 1MHz		1	1.3	pF

Notes

- 1、 TLP Setting : t_p=100ns, t_r=0.2ns, I_{TLP} and V_{TLP} sample window:t₁=70ns to t₂=90ns.
- 2、 Dynamic resistance calculated from I_{PP}=4A to I_{PP}=16A using "Best Fit".

Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

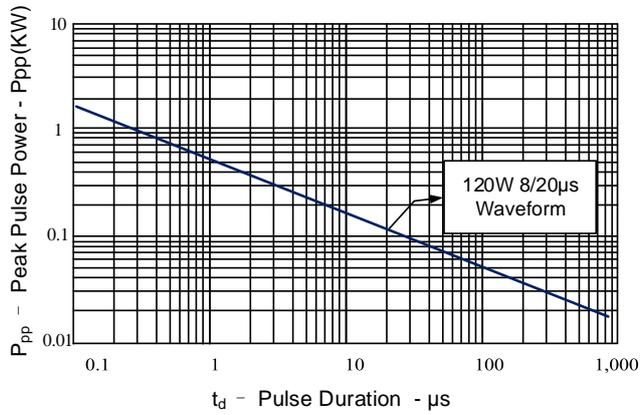


Figure 2: Power Derating Curve

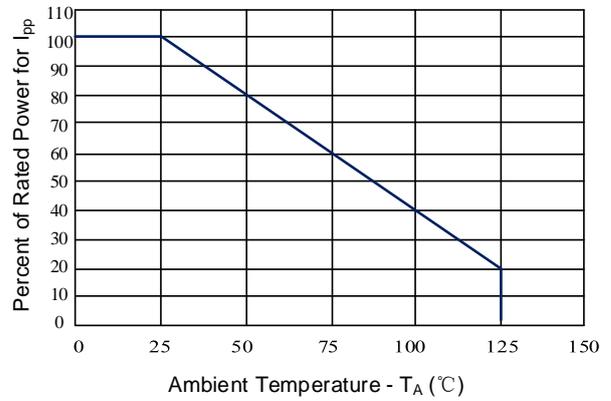


Figure 3: Clamping Voltage vs. Peak Pulse Current

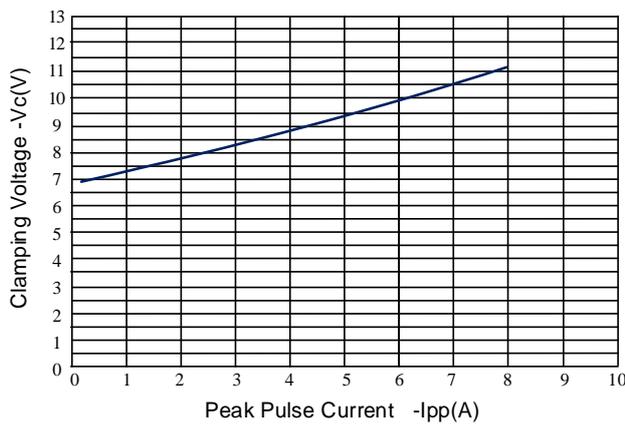


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

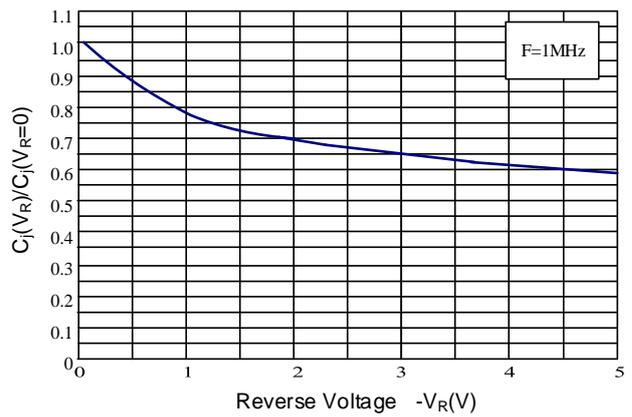


Figure 5: Pulse Waveform



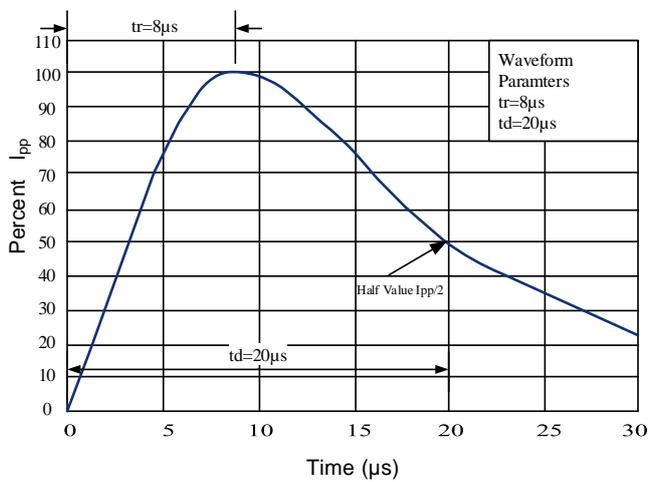


Figure 6: TLP Positive I-V Curve

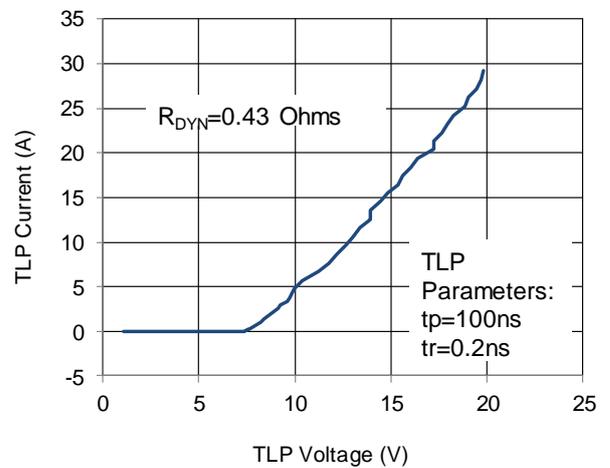

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	Temperature Min ($T_{S(min)}$)	150°C
	Temperature Max ($T_{S(max)}$)	200°C
	Time (min to max) (t_s)	60 – 190 secs
Average ramp up rate (Liquidus Temp) (T_L) to peak		5°C/second max
$T_{S(max)}$ to T_L — Ramp-up Rate		5°C/second max
Reflow	Temperature (T_L) (Liquidus)	217°C
	Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_P)		260+0/-5 °C
Time within actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_P)		8 minutes Max.
Do not exceed		280°C

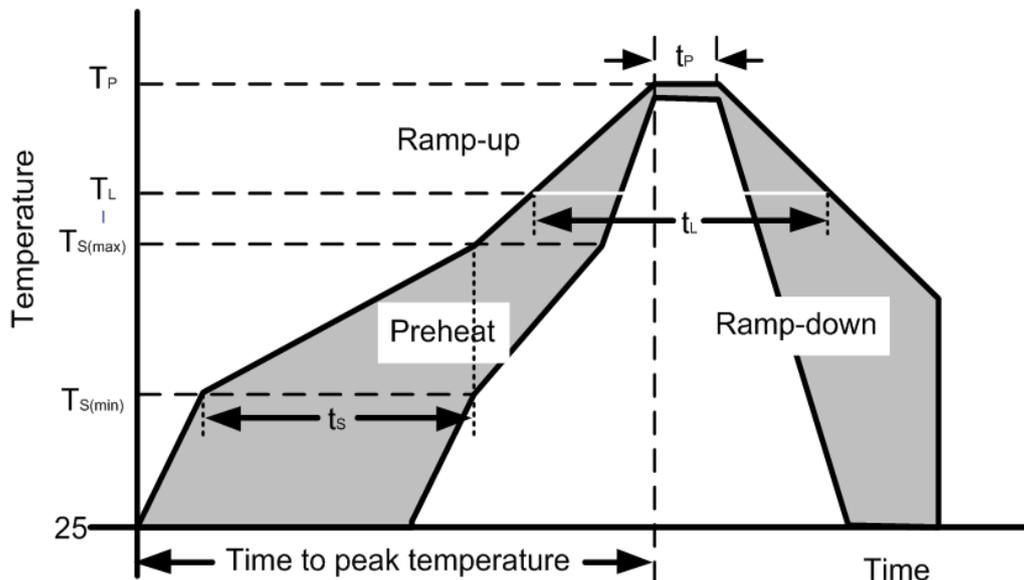

Outline Drawing –DFN1006-2L

PACKAGE OUTLINE



DFN1006-2L

SYMBOL	MILLIMETERS		
	MIN	NOM	MAX
A	0.45	0.50	0.55
A1	0	0.02	0.05
b	0.45	0.50	0.55
C	0.12	0.15	0.18
D	0.95	1.00	1.05
e	0.65BSC		
E	0.55	0.60	0.65
L	0.20	0.25	0.30
L1	0.05REF		
h	0.07	0.12	0.17

Land Pattern

Marking Codes


Part Number	Marking Code
ES05DUCFM	

Package Information


Qty: 10k/Reel

Tape Information


Tape Dimensions

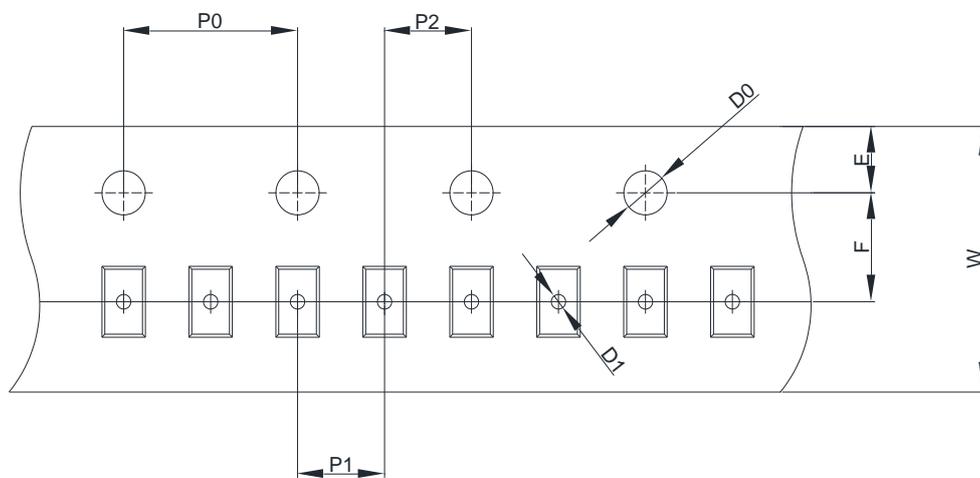

top view

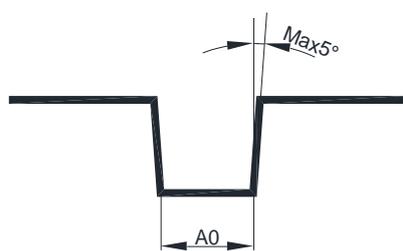


front view

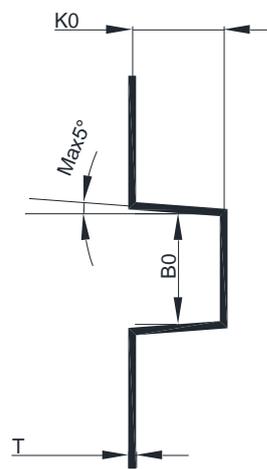

end view

Quadrant Assignments For PIN1 Orientation In Tape

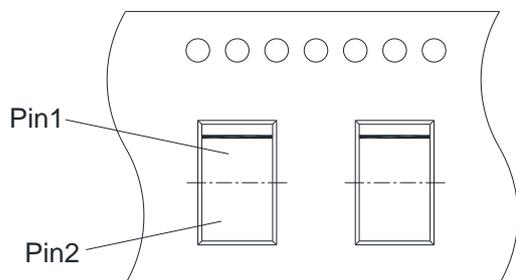

User Direction of Feed

SYMBOL	A0	B0	K0	P0	P1	P2
SPEC	0.70±0.05	1.15±0.05	0.57±0.03	4.00±0.10	2.00±0.1	2.00±0.05
SYMBOL	T	E	F	D0	D1	W
SPEC	0.20±0.05	1.75±0.10	3.50±0.05	1.55±0.05	0.40±0.10	8.00±0.1

Revision History

No.	Version	Date	Revision Item	Request	Function and characteristic checking	Package dimension checking	Typos checking
1	1.0	2018-07-13	Released Version	Qi Shu Kun	Yin Peng	Ge Zheng Bing	Liu Jia Ying
2	1.1	2018-07-27	Change the Max value of Cj from 1.5pF to 1.3pF. 2019.01.03 Double check	Qi Shu Kun	Yin Peng	Ge Zheng Bing	Liu Jia Ying
3	1.2	2019-08-20	Add tape information	Qi Shu Kun	Yin Peng	Ge Zheng Bing	Liu Jia Ying
4	1.3	2020-03-17	Add MSL level	Qi Shu Kun	Qi Shu Kun	Liu Jia Ying	Liu Jia Ying
5	1.4	2022-02-16	Update Tape Information	Qi Shu Kun	Qi Shu Kun	Liu Jia Ying	Liu Jia Ying