

Single Non-Inverting Schmitt Trigger Buffer

General Description


The ET74HC1G17 is a single inverter with Schmitt-trigger input. Inputs include clamp diodes. This enables the use of current limiting resistors to interface inputs to voltages in excess of V_{CC} . Schmitt trigger inputs transform slowly changing input signals into sharply defined jitter-free output signals.

Features

- Designed for 2V to 6V V_{CC} Operation
- Over-voltage Tolerant Inputs
- 2.6mA Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- These Devices are Pb-Free and are RoHS Compliant
- ESD Protection Complies with JEDEC Standard
 - HBM: $\pm 4000V$ Pass (JEDEC JS-001)
 - CDM: $\pm 1500V$ Pass (JEDEC JS-002)
- Latch-up Performance Exceeds $\pm 200mA$ per JEDEC JESD78F
- Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET74HC1G17	SC70-5 (1.3mm × 2.1mm)	Tape and Reel, 3K/Reel	Level 1
ET74HC1G17T	SOT23-5 (1.6mm × 2.9mm)	Tape and Reel, 3K/Reel	Level 3
ET74HC1G17Y	DFN6 (1.0mm × 1.5mm)	Tape and Reel, 3K/Reel	Level 1

Pin Configuration

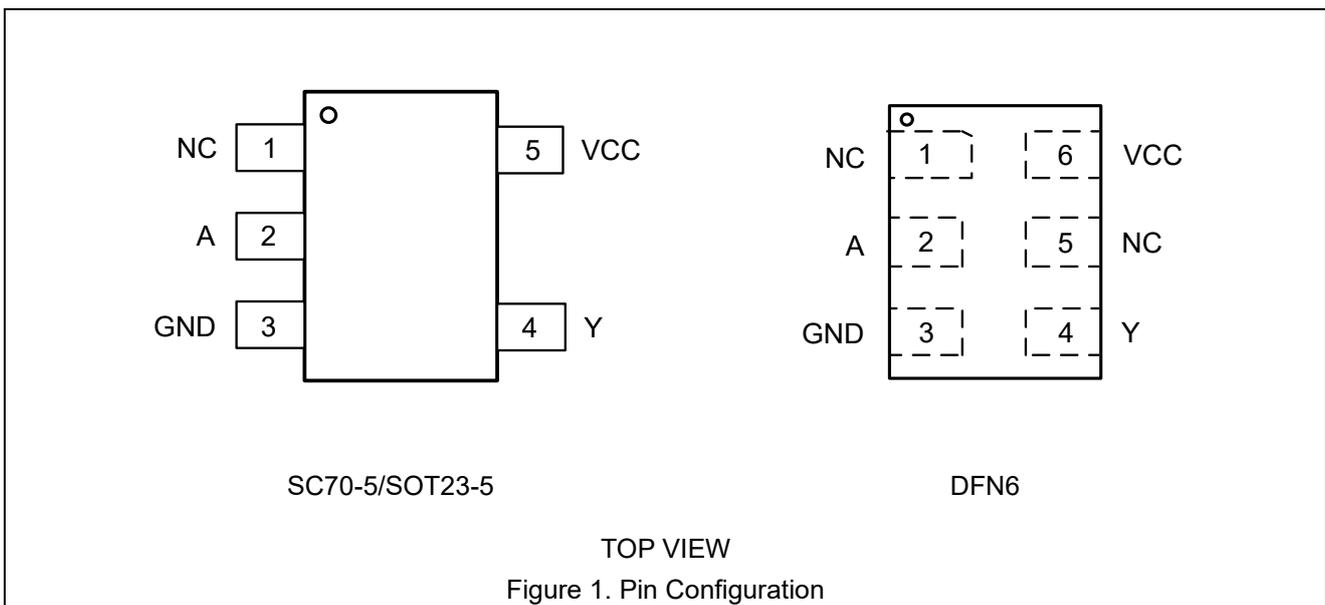


ET74HC1G17

Pin Function

Pin No.			Pin Name	Pin Function
SC70-5	SOT23-5	DFN6		
1	1	1	NC	No Connect
2	2	2	A	Input
3	3	3	GND	Ground
4	4	4	Y	Output
/	/	5	NC	No Connect
5	5	6	VCC	Supply Voltage

Block Diagram

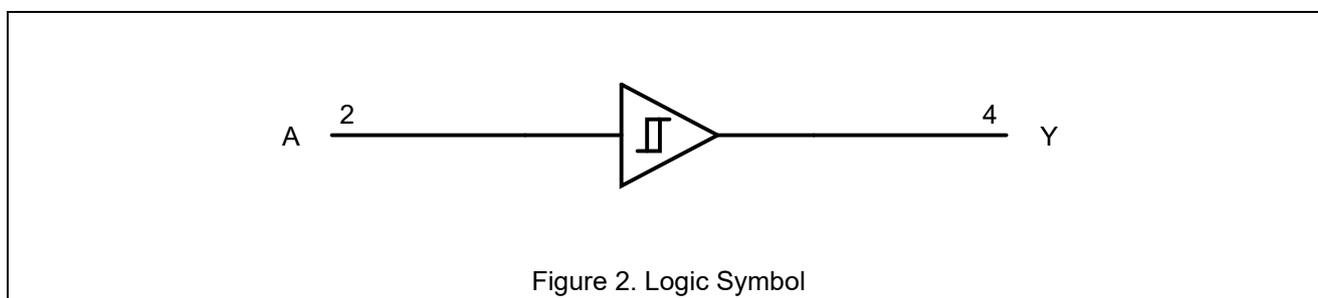

Function Table

Input A	Output Y
L	L
H	H

Absolute Maximum Ratings

Symbol	Parameter	Value	Unit
V _{CC}	DC Supply Voltage(VCC Pin)	-0.5 to 7.0	V
V _I	DC Input Voltage ⁽¹⁾	-0.5 ≤ V _I ≤ +7.0	V
V _O	DC Output Voltage Output in Higher or Low State	-0.5 to V _{CC} + 0.5	V
I _{IK}	DC Input Diode Current V _I < GND	-50	mA
I _{OK}	DC Output Diode Current V _O < GND, V _O > V _{CC}	±50	mA
I _O	DC Output Sink Current	±50	mA
I _{CC}	DC Supply Current Per Supply Pin	+100	mA
I _{GND}	DC Ground Current Per Supply Pin	-100	mA
T _{STG}	Storage Temperature Range	-65 to 150	°C
T _L	Lead Temperature, Soldering 10 Seconds	260	°C
T _J	Max Junction Temperature	150	°C

ET74HC1G17

Absolute Maximum Ratings (Continued)

Symbol	Parameter	Value	Unit	
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±4000	V
		Charged Device Model ⁽³⁾	±1500	V
I _{LU}	Max Latch Up Current Above V _{CC} and GND at 125°C ⁽⁴⁾	±200	mA	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: I_o absolute maximum rating must be observed.

Note2: HBM tested per JEDEC JS-001;

Note3: CDM tested per JEDEC JS-002;

Note4: Latch Up Current Maximum Rating tested per JEDEC JESD78F.

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	300	°C/W
	SOT23-5		250	
	DFN6		440	
P _D	SC70-5	Power Dissipation in Still Air at 85°C	215	mW
	SOT23-5		260	
	DFN6		150	

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	DC Supply Voltage	2	6	V
V _{IN}	DC Input Voltage	0	6	V
V _{OUT}	DC Output Voltage(High or Low State)	0	6	V
T _A	Operating Temperature Range	-40	125	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

ET74HC1G17

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		2.0	1.5			1.5		V
			4.5	3.15			3.15		
			6.0	4.2			4.2		
V _{IL}	Low-Level Input Voltage		2.0			0.5		0.5	V
			4.5			1.35		1.35	
			6.0			1.8		1.8	
V _{OH}	High-Level Output Voltage	I _{OH} = -20μA	2~6	V _{CC} - 0.1	V _{CC}		V _{CC} - 0.1		V
		I _{OH} = -2mA	4.5	4.13	4.32		3.7		
		I _{OH} = -2.6mA	6.0	5.63	5.81		5.2		
V _{OL}	Low-Level Output Voltage	I _{OL} = 20μA	2~6		0.0	0.1		0.1	V
		I _{OL} = 2mA	4.5		0.15	0.33		0.4	
		I _{OL} = 2.6mA	6.0		0.16	0.33		0.4	
I _{IN}	Input Leakage Current	V _{IN} = 6V or GND	0~6		±0.1			±1.0	μA
I _{OFF}	Power Off Leakage Current	V _{IN} = 6V or V _{OUT} = 6V	0			1		10	μA
I _{CC}	Quiescent Supply Current	V _{IN} = 6V or GND	6			1		10	μA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

AC Electrical Characteristics

t_r = t_f = 5ns

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
t _{PLH} t _{PHL}	Propagation Delay (Figure3 and 4)	C _L = 50pF	2.0		32	122		142	ns
		C _L = 50pF	4.5		11	25		29	
		C _L = 15pF	5.0		9				
		C _L = 50pF	6.0		10	22		25	

ET74HC1G17

Capacitance Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
C_{IN}	Input Capacitance	$V_{CC} = 6V, V_I = 0V \text{ or } V_{CC}$		4.5		pF
C_{PD}	Power Dissipation Capacitance ⁽⁵⁾	10MHz, $V_{CC} = 3.3V, V_I = 0V \text{ or } V_{CC}$		20		pF
		10MHz, $V_{CC} = 6V, V_I = 0V \text{ or } V_{CC}$		24		

Note5. C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

AC Test Circuit

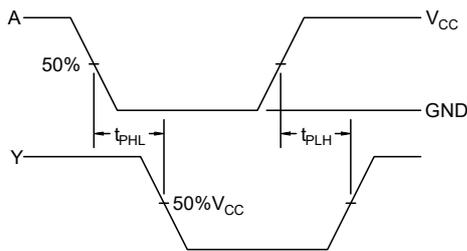


Figure 3. Switching Waveform


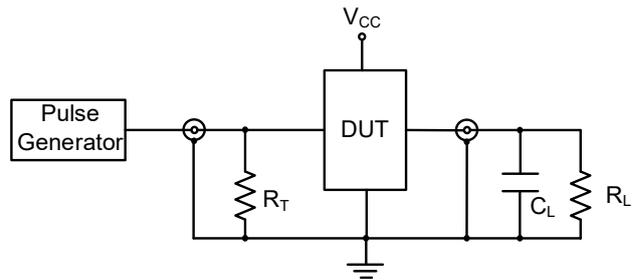


Figure 4. Test Circuit

ET74HC1G17

Package Dimension

SC70-5 (1.3mm × 2.1mm)

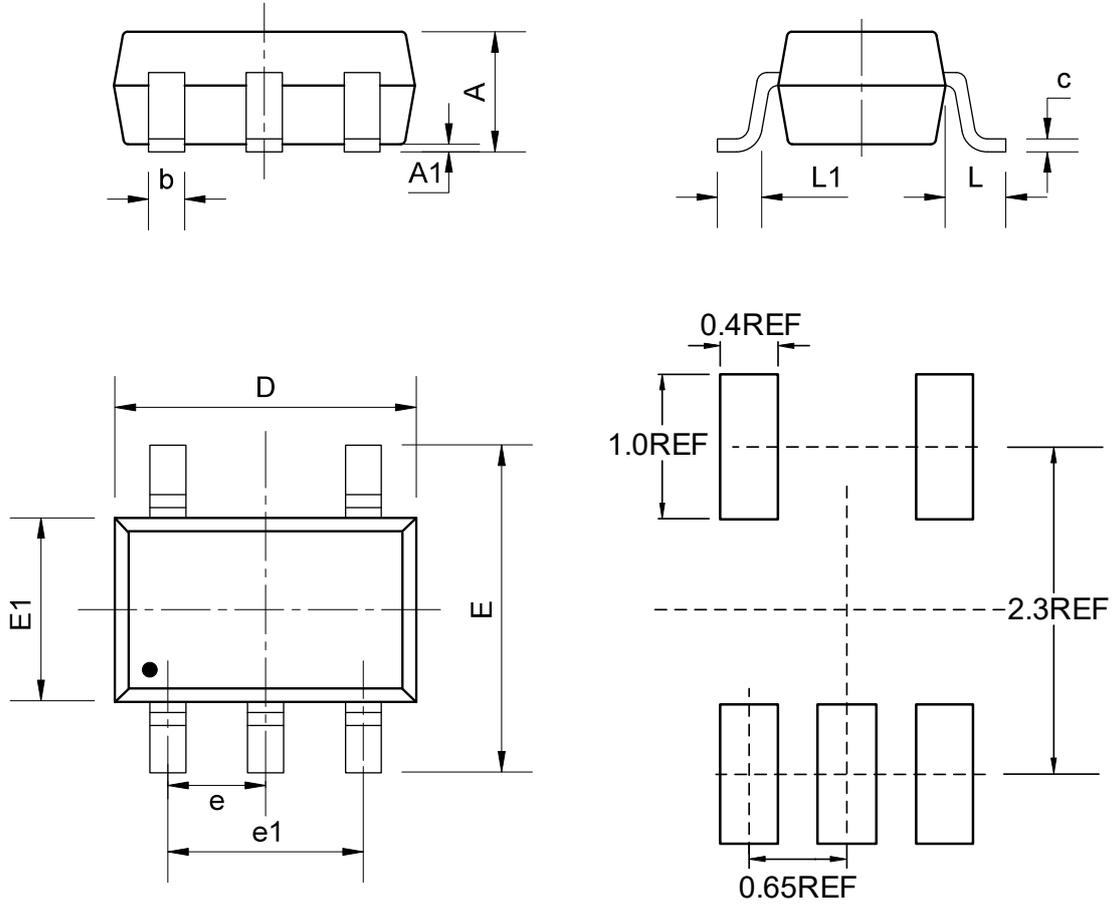


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.10
A1	0.00	-	0.15
b	0.15	-	0.35
c	0.08	-	0.20
D	2.00	2.10	2.30
e	0.65BSC		
e1	1.30BSC		
E	2.15	2.30	2.50
E1	1.15	1.30	1.45
L	0.50REF		
L1	0.33REF		

ET74HC1G17

SOT23-5 (1.6mm × 2.9mm)

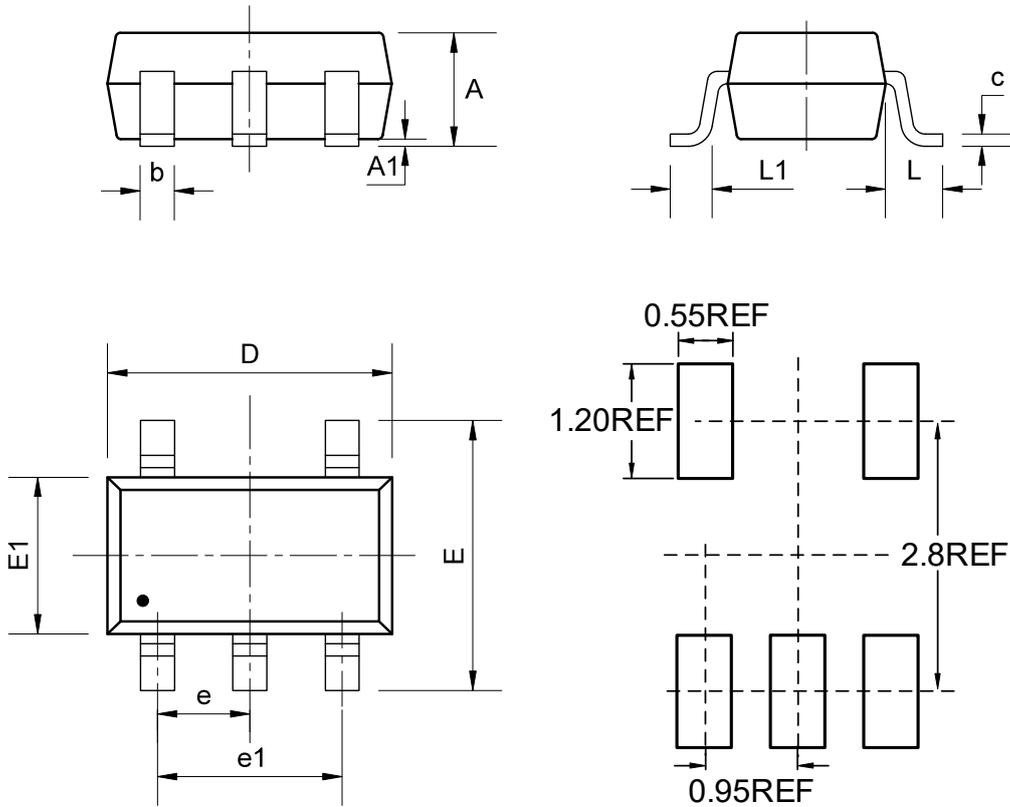


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.25
A1	0.00	-	0.15
b	0.36	-	0.50
c	0.12	-	0.20
D	2.75	2.9	3.05
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
E	2.60	2.80	3.00
E1	1.45	1.6	1.75
L	0.60REF		
L1	0.30	0.45	0.60

ET74HC1G17

DFN6 (1.0mm × 1.5mm)

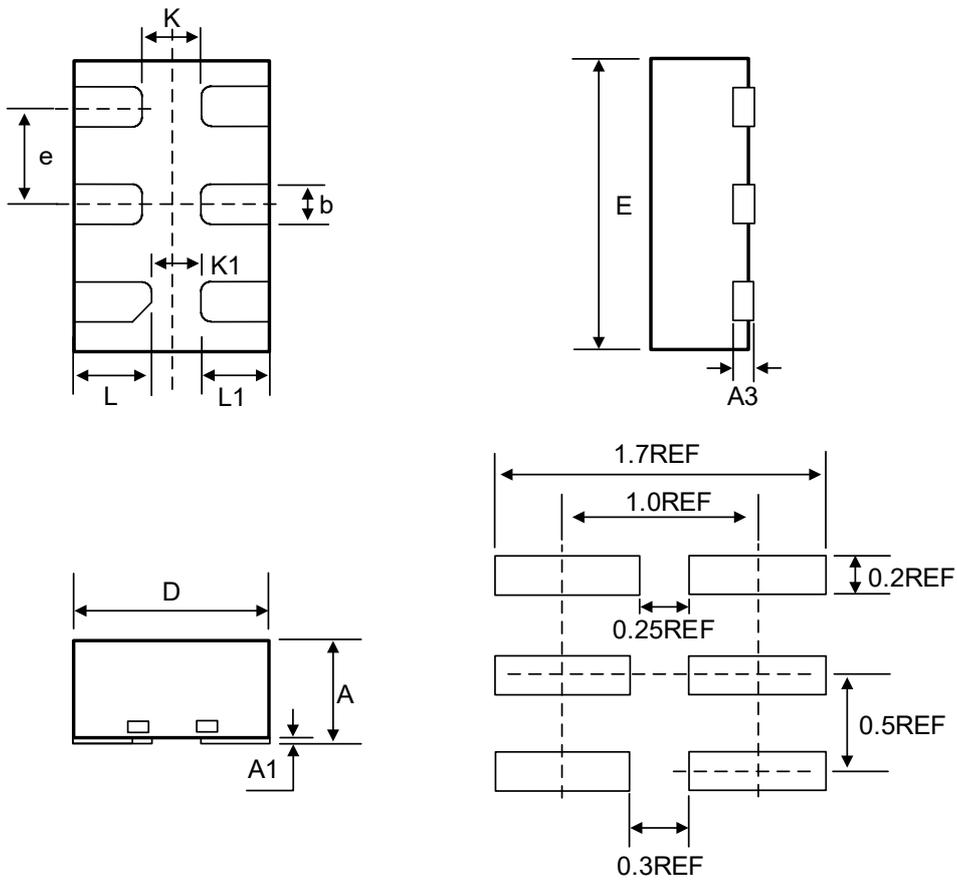

COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0.00	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.50BSC		
K	0.30REF		
K1	0.25REF		
L	0.35	0.40	0.45
L1	0.30	0.35	0.40

ET74HC1G17

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2025-09-04	Official Version	Wang anran	Yang xiaoxu	Liu jiaying